
Electromechanical Relays Selection Guide

Latching



JAN

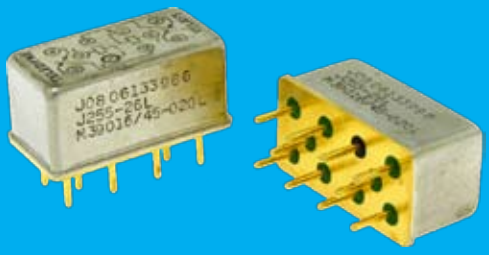

Non-Latching



RF





Commercial




Established Reliability

Surface-Mount





Environmental



Attenuated





TELEDYNE RELAYS

A Teledyne Technologies Company

RoHS or Non-RoHS: Your Choice!



Switching Solutions

Teledyne Relays has been the world's innovative leader in the manufacture of ultraminiature, hermetically sealed, electromechanical and solid-state switching products for more than 40 years. The company's comprehensive product line meets a wide range of requirements for defense and aerospace, industrial, commercial, medical and RF & wireless applications.

Business Focus

- MIL QPL & COTS Solid-State Relays
- MIL QPL & COTS Electromechanical Relays
- HiRel (Space) Electromechanical Relays
- RF & Microwave Relays & Coaxial Switches
- Industrial Solid-State Relays
- Switching Matrices

Markets


- Commercial & Military Aviation
- Defense & Aerospace
- Telecom/Communications (Wireless)
- Instrumentation & Test
- Industrial Power & Motion Control
- Medical Applications

Product Assurance

Under an aggressive Total Quality Management (TQM) program, Teledyne Relays has embraced a "continuous improvement" culture. With recognized certifications such as AS/EN/JISQ 9100 - Revision B and ISO 9001:9002, DSCC MIL-STD-790 and Boeing D6-82479 Appendix A, Teledyne Relays has become a primary supplier of switching solutions with the highest quality and reliability to industry leaders around the world.

Technical Service & Customer Support

Teledyne Relays provides easy access to technical service and customer support. Our websites make it easy to find technical information, buy products and even get e-mail responses within 24 hours. Switching solutions are only a mouse click away at www.teledynerelays.com or at teledyne-europe.com. Information about coax switches is available at www.teledynecoax.com.

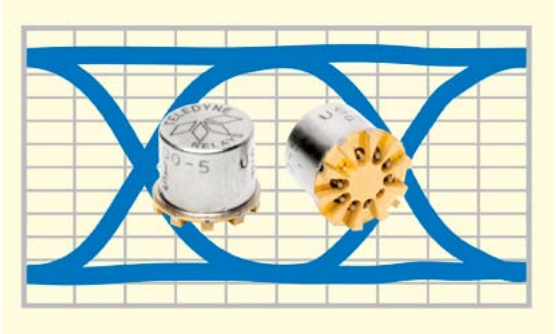

Teledyne Relays offer superior signal integrity up to 12 Gbps. See the RF relays section in our website.

Table of Contents

Series	Description	Page
RF RELAYS		
RF100/RF103	High Repeatability, Broadband Centigrid® Relays, Non-Latching DPDT	4
GRF172	Surface-Mount Centigrid® RF Relays, Non-Latching DPDT	4
RF300/RF303	High Repeatability, Broadband TO-5 Relays, Non-Latching DPDT	5
RF312	High Repeatability, Broadband TO-5 Relays, Non-Latching DPDT	6
RF311/RF331	High Repeatability, Broadband TO-5 Relays, Non-Latching SPDT	7
GRF342	Surface-Mount TO-5 RF Relays, Magnetic-Latching DPDT	7
RF180	Broadband RF Relays, Magnetic-Latching DPDT	8
RF341	Broadband TO-5 RF Relays, Magnetic-Latching SPDT	8
RF310/RF313	High Repeatability TO-5 Relays, Normally Closed, Bypass	9
RF320/RF323	High Repeatability TO-5 Relays, Normally Open, Bypass	9
A150	Broadband Attenuator RF Relay	10
A152	Broadband Attenuator RF Relay	10
COMMERCIAL RELAYS		
122C	Centigrid® Relays (CMOS Compatible), Magnetic-Latching DPDT	11
172	Centigrid® Relays, Non-Latching DPDT	11
712	TO-5 Relays, Non-Latching DPDT	12
722	TO-5 Relays, Magnetic-Latching DPDT	12
732	TO-5 Relays, Non-Latching Sensitive DPDT	13
COMMERCIAL SURFACE-MOUNT RELAYS		
S114	Surface-Mount Centigrid® Relays, Non-Latching DPDT	14
S134	Surface-Mount Centigrid® Relays, Non-Latching Sensitive DPDT	14
S172	Surface-Mount Centigrid® Relays, Non-Latching DPDT	15
S422	Surface-Mount TO-5 Relays, Magnetic-Latching DPDT	15
ESTABLISHED RELIABILITY RELAYS		
ER114	Centigrid® Relays, Non-Latching DPDT	16
ER116C	Centigrid® Relays (CMOS Compatible), Non-Latching DPDT	16
ER134	Centigrid® Relays, Non-Latching Sensitive DPDT	17
ER136C	Centigrid® Relays (CMOS Compatible), Non-Latching Sensitive DPDT	17

See specific series for additional features and options

Continued on next page

© 2010 TELEDYNE RELAYS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Table of Contents

ESTABLISHED RELIABILITY RELAYS (continued)		
Series	**Description**	**Page**
ER411	TO-5 Relays, Non-Latching SPDT	18
ER431	TO-5 Relays, Non-Latching Sensitive SPDT	18
ER412	TO-5 Relays, Non-Latching DPDT	19
ER432	TO-5 Relays, Non-Latching Sensitive DPDT	19
255	Half-Size Crystal Can, Magnetic-Latching DPDT	20
ER421	TO-5 Relays, Magnetic-Latching SPDT	20
ER420	TO-5 Relays, Magnetic-Latching DPDT	21
ER422	TO-5 Relays, Magnetic-Latching DPDT	21
MILITARY QUALIFIED (JAN) RELAYS		
J114	Centigrid® Relays, Non-Latching DPDT	22
J116C	Centigrid® Relays (CMOS Compatible), Non-Latching DPDT	22
J134	Centigrid® Relays, Non-Latching Sensitive DPDT	23
J136C	Centigrid® Relays (CMOS Compatible), Non-Latching Sensitive DPDT	23
J411	TO-5 Relays, Non-Latching SPDT	24
J431	TO-5 Relays, Non-Latching Sensitive SPDT	24
J412	TO-5 Relays, Non-Latching DPDT	25
J432	TO-5 Relays, Non-Latching Sensitive DPDT	25
J255	Half-Size Crystal Can, Magnetic-Latching DPDT	26
J421	TO-5 Relays, Magnetic-Latching SPDT	26
J420	TO-5 Relays, Magnetic-Latching DPDT	27
J422	TO-5 Relays, Magnetic-Latching DPDT	27
HIGH-PERFORMANCE RELAYS		
412H/432H	High-Temperature (200°C) TO-5 Relays, Non-Latching DPDT	28
422H	High-Temperature (200°C) TO-5 Relays, Magnetic-Latching DPDT	28
412K	High-Shock TO-5 Relays, Non-Latching DPDT	29
422K	High-Shock TO-5 Relays, Magnetic-Latching DPDT	29
412V/432V	High-Vibration TO-5 Relays, Non-Latching DPDT	30

See specific series for additional features and options

Continued on next page

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com

© 2010 TELEDYNE RELAYS

Table of Contents

APPENDIX		
	Description	**Page**
	Signal Integrity Eye Diagrams	31-38
	RoHS and Reach Certificate of Compliance	39
	Part Numbering System	40-41
	Spacer Pad Options	42
	Spreader Pad Options	43
	Ground Pin Options	44
	Established Reliability Program	45-46
	Teledyne Relays HI-REL Program	47
	Authorized Distributors	48
	Authorized North American Representatives	49

Teledyne Relays offers a variety of options to customize and meet your specific design needs.



GRF Option
TO-5 Relays with straight butt pins for surface-mount applications
* RF Relays Only



SGRF Option
TO-5 Relays with Gull-Wing (J-Lead) pins for surface-mount applications
* RF Relays Only



GRF Option
Centigrid® Relays with straight butt pins for surface-mount applications
* RF Relays Only



SGRF Option
TO-5 Relays with Gull-Wing (J-Lead) pins for surface-mount applications
* RF Relays Only



SRF Option
Relays with Gull-Wing (J-Lead) pins for surface-mount applications
* RF Relays Only




/S Option
Relays with 0.187" trimmed leads
See Appendix: Part Numbering System



Spacer Pad Option
Relays with polyester film pad to space between PCB and Relay Header
See Appendix: Spacer Pad Options



Spreader Pad Option
Relays with Diallyl Phthalate pad to spread pins
See Appendix: Spreader Pad Options



/Q, /R Option
Relays with solder dipped leads. Pb/Sn (60/40) or RoHS solder available
See Appendix: Part Numbering System

See specific series for additional features and options

Series RF100/RF103 Electromechanical Relays


The RF100 and RF103 Centigrid® relays are designed to provide improved RF signal repeatability over the frequency range.

The GRF100 and GRF103 Centigrid® relays feature a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact and pole-to-pole isolation. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability.

The SGRF100 and SGRF103 Centigrid® relays extend performance advantages over similar RF devices that simply offer formed leads for surface mounting.

- Excellent Signal integrity up to 10Gbps
- Hermetically Sealed
- High Resistance to ESD
- Metal Enclosure for EMI shielding
- High Repeatability
- Broader bandwidth
- Through-hole or surface-mount configurations

Relay Type
DPDT Non-Latching
Coil Type
100 = Standard Coil 103 = Sensitive Coil
Mounting
RF = Thru-hole GRF = Surface-Mount (Stub) SGRF = Surface-Mount (J-Lead)
Temperature
Storage: –65°C to +125°C Operating: –55°C to +85°C



100
103

Part No.		Nominal Coil		Typical RF Performance				
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR (max)	Isolation (dB) Pole to Pole (min)	Isolation (dB) Across Contacts (min)	Insertion Loss (dB) (max)
	RF100	5	50	DC-1	1.1 : 1	35	25	0.2
		12	390	1-2	1.5 : 1	30	20	0.5
	RF103	5	100	2-3	1.6 : 1	30	20	0.6
		12	800					
	GRF100	5	50	DC-1	1.1 : 1	45	30	0.2
		12	390	1-3	1.2 : 1	40	25	0.3
	GRF103	5	100	3-4	1.3 : 1	35	25	0.6
		12	800	4-6	2.2 : 1	30	25	1.2
	SGRF100	5	50	DC-1	1.2 : 1	35	30	0.2
		12	390	1-3	1.3 : 1	30	30	0.7
	SGRF103	5	100	3-4	1.4 : 1	25	25	0.8
		12	800	4-6	1.8 : 1	25	25	1.0

Series GRF172 Electromechanical Relays


The GRF172 Centigrid® relay is a hermetically sealed, armature relay for 2.5GHz RF applications. Its low profile height .330" (8.38 mm) and .100" (2.54 mm) grid spaced terminals make it an ideal choice where extreme packaging density and/or close PC board spacing are required. The GRF172 features a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact and pole-to-pole isolation. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability. The GRF172 extends performance advantages over similar RF devices that simply offer formed leads for surface mounting.

The Series GRF172D has an internal discrete silicon diode for coil suppression.


- Excellent Signal integrity up to 10Gbps
- Hermetically Sealed
- High Resistance to ESD
- Metal Enclosure for EMI shielding
- High Repeatability
- Broader bandwidth
- Through-hole or surface-mount configurations

Relay Type
DPDT Non-Latching
Coil Type
172 = Standard Coil
Diode Option
D = Internal diode for coil transient suppression
Mounting
GRF = Surface-Mount (Stub)
Temperature
Storage: –65°C to +125°C Operating: –55°C to +85°C

Part No.		Nominal Coil		Typical RF Performance				
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR (max)	Isolation (dB) Pole to Pole (min)	Isolation (dB) Across Contacts (min)	Insertion Loss (dB) (max)
	GRF172 GRF172D	5	50	DC-1	1.1 : 1	45	30	0.2
		12	390	1-2	1.2 : 1	40	25	0.3
		26	100	2-2.5	1.2 : 1	40	25	0.3



GRF172



GRF172D

Schematics as viewed from terminals

© 2010 TELEDYNE RELAYS

Series RF300/RF303 Electromechanical Relays


The RF300 and RF303 TO-5 relays are designed to provide improved RF signal repeatability over the frequency range.
The GRF300 and GRF303 TO-5 relays feature a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact and pole-to-pole isolation. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability.
The SGRF300 and SGRF303 TO-5 relays extend performance advantages over similar RF devices that simply offer formed leads for surface mounting.

- Excellent Signal integrity up to 10Gbps+
- Hermetically Sealed
- High Resistance to ESD
- Metal Enclosure for EMI shielding
- High Repeatability
- Broader bandwidth
- Through-hole or surface-mount configurations


Relay Type
DPDT Non-Latching
Coil Type
300 = Standard Coil
303 = Sensitive Coil
Diode Option
D = Internal diode for coil transient suppression
DD = Internal diode for coil transient suppression and polarity reversal protection
Mounting
RF = Thru-hole GRF = Surface-Mount (Stub)
SGRF = Surface-Mount (J-Lead)
SRF = Surface Mount (J-Lead)
Temperature
Storage: –65°C to +125°C
Operating: –55°C to +85°C

Part No.	Nominal Coil		Typical RF Performance				
	Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR (max)	Isolation (dB) Pole to Pole (min)	Isolation (dB) Across Contacts (min)	Insertion Loss (dB) (max)
 **RF300**	5	50	DC-1	1.1 : 1	30	25	0.2
RF300D	12	390	1-2	1.1 : 1	25	20	0.3
RF303	5	100	2-3	1.2 : 1	25	20	0.4
RF303D	12	850					
 **GRF300**	5	50	DC-1	1.1 : 1	40	30	0.2
GRF300D	12	390	1-3	1.1 : 1	40	30	0.2
GRF303	5	100	3-4	1.3 : 1	30	30	0.6
GRF303D	12	850	4-6	1.6 : 1	25	25	1.0
 **SGRF300**	5	50	DC-1	1.2 : 1	40	30	0.2
SGRF300D	12	390	1-3	1.2 : 1	40	30	0.4
SGRF303	5	100	3-4	1.2 : 1	20	25	0.8
SGRF303D	12	850	4-6	1.8 : 1	10	20	1.0
 **SRF300**	5	50	DC-1	1.1 : 1	25	25	0.5
SRF300D	12	390	1-3	1.5 : 1	25	25	0.5
SRF303	5	100	3-4	2.0 : 1	15	15	3.0
SRF303D	12	850	4-6	2.5 : 1	10	10	4.0


For RF300DD & RF303DD values please see Datasheet



300
303



300D
303D



300DD
303DD


Schematics as viewed from terminals

Series RF312 Electromechanical Relays

The RF312 is designed to improve upon the RF300/RF303 relay's high frequency performance. The RF312 offers monotonic insertion loss over to 8GHz. This improvement in RF insertion loss over the frequency range, makes these relays highly suitable for use in attenuator and other RF circuits.
The GRF312 is designed to improve upon the GRF300/GRF303 relay's high frequency performance. The GRF312 TO-5 relay features a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact and pole-to-pole isolation. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability.

- **Excellent Signal integrity up to 12Gbps+**
- **Hermetically Sealed**
- **High Resistance to ESD**
- **Metal Enclosure for EMI shielding**
- **High Repeatability**
- **Broader bandwidth**
- **Through-hole or surface-mount configurations**

Relay Type
DPDT Non-Latching
Coil Type
312 = Standard Coil
Mounting
RF = Thru-hole
GRF = Surface-Mount (Stub)
SGRF = Surface-Mount (J-Lead)
Temperature
Storage: –65°C to +125°C
Operating: –55°C to +85°C



312

Part No.		Nominal Coil		Typical RF Performance				
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR (max)	Isolation (dB)		Insertion Loss (dB) (max)
						Pole to Pole (min)	Across Contacts (min)	
	**RF312**	5	50	DC-2	1.2 : 1	30	20	0.2
				2-4	1.2 : 1	25	20	0.4
		12	390	4-6	1.3 : 1	25	20	0.6
				6-8	1.4 : 1	20	20	0.8
	**GRF312**	5	50	DC-2	1.4 : 1	40	30	0.3
				2-4	1.4 : 1	40	30	0.5
		12	390	4-6	1.5 : 1	35	30	1.0
				6-8	1.5 : 1	35	30	1.5
	**SGRF312**	5	50	DC-2	1.2 : 1	40	30	0.2
				2-4	1.2 : 1	35	30	0.5
		12	390	4-6	1.3 : 1	30	25	1.0
				6-8	1.5 : 1	30	25	1.5

Schematics as viewed from terminals


© 2010 TELEDYNE RELAYS

Series RF311/RF331 Electromechanical Relays

The RF311/RF331 relays are designed to provide improved RF signal repeatability over the frequency range. These relays are highly suitable for use in attenuator and other RF circuits.
The GRF311 offers monotonic insertion loss to 8GHz. This improvement in RF insertion loss over the frequency range makes these relays highly suitable for use in attenuator and other RF circuits. The GRF311 features a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact isolation. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability.

- Excellent Signal integrity up to 10Gbps
- Hermetically Sealed
- High Resistance to ESD
- Metal Enclosure for EMI shielding
- High Repeatability
- Broader bandwidth
- Through-hole or surface-mount configurations

Relay Type
SPDT Non-Latching
Coil Type
311 = Standard Coil
331 = Sensitive Coil
Mounting
RF = Thru-hole GRF = Surface-Mount (Stub)
Temperature
Storage: –65°C to +125°C Operating: –55°C to +85°C



311
331

Part No.		Nominal Coil		Typical RF Performance			
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR (max)	Isolation Across Contacts (dB) (min)	Insertion Loss (dB) (max)
	RF311	5	63	DC-2	1.3 : 1	25	0.2
		12	500	2-4	1.6 : 1	20	0.4
		26	2000	4-6	1.6 : 1	20	0.6
				6-8	1.6 : 1	15	0.8
	GRF311	5	63	DC-2	1.2 : 1	30	0.3
		12	500	2-4	1.5 : 1	25	0.5
		26	2000	4-6	1.5 : 1	25	0.7
				6-8	1.6 : 1	20	1.0
	RF331	5	125	DC-2	1.3 : 1	25	0.2
		12	1025	2-4	1.6 : 1	20	0.4
		26	4000	4-6	1.6 : 1	20	0.6
				6-8	1.6 : 1	15	0.8

Series GRF342 Electromechanical Relays


The Series GRF342 relay is a hermetically sealed, RF relay designed from inception for surface mount applications. This magnetic-latching relay features extremely low internal circuit losses for exceptional time and frequency domain response characteristics through and beyond the UHF spectrum and into the S band. The GRF342 features a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact and pole-to-pole isolation. This ground shield provides an RF ground interface that results in improved high-frequency performance as well as parametric repeatability. The GRF342 extends performance advantages over similar RF devices that simply offer formed leads for surface mounting.

- Excellent Signal integrity up to 10Gbps
- Hermetically Sealed
- High Resistance to ESD
- Metal Enclosure for EMI shielding
- High Repeatability
- Broader bandwidth
- Through-hole or surface-mount configurations

Relay Type
DPDT Magnetic-Latching
Coil Type
342 = Standard Coil
Mounting
GRF = Surface-Mount (Stub)
Temperature
Storage: –65°C to +125°C Operating: –55°C to +85°C

Part No.		Nominal Coil		Typical RF Performance				
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR (max)	Isolation (dB)		Insertion Loss (dB) (max)
						Pole to Pole (min)	Across Contacts (min)	
	GRF342	5	50	DC-2	1.1 : 1	40	35	0.3
		12	390	2-4	1.2 : 1	30	30	0.4
				4-6	1.4 : 1	25	25	0.8

Schematics as viewed from terminals



GRF342

SCHEMATIC
(Coil A Last Energized)

© 2010 TELEDYNE RELAYS


Series RF180 Electromechanical Relays

The Series RF180 relay is a hermetically sealed, magnetic-latching relay featuring extremely low intercontact capacitance for exceptional RF performance over the full UHF spectrum. Its low profile height and .100" (2.54 mm) grid spaced terminals make it ideal for applications where extreme packaging density and/or close PC board spacing are required.
The GRF180 features a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact and pole-to-pole isolation. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability.

- Excellent Signal integrity up to 10Gbps
- Hermetically Sealed
- High Resistance to ESD
- Metal Enclosure for EMI shielding
- High Repeatability
- Broader bandwidth
- Through-hole or surface-mount configurations

Relay Type
DPDT Magnetic-Latching
Coil Type
180 = Standard Coil
Mounting
RF = Thru-hole GRF = Surface-Mount (Stub)
Temperature
Storage: −65°C to +125°C Operating: −55°C to +85°C

Part No.		Nominal Coil		Typical RF Performance				
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR (max)	Isolation (dB) Pole to Pole (min)	Isolation (dB) Across Contacts (min)	Insertion Loss (dB) (max)
	**RF180**	5	61	DC-2	1.3 : 1	50	30	0.2
		12	500	2-4	1.3 : 1	45	30	0.3
		26	2000	4-6	2.0 : 1	30	25	1.5
	**GRF180**	5	61	DC-2	1.2 : 1	50	35	0.2
		12	500	2-4	1.3 : 1	35	30	0.4
		26	2000	4-6	2.0 : 1	25	30	1.5



180

SCHEMATIC
(Coil B Last Energized)


Series RF341 Electromechanical Relays

The RF341 series relay is an ultraminiature, hermetically sealed, magnetic-latching relay featuring extremely low intercontact capacitance for exceptional RF performance well into the C band. Its low profile and small size make it ideal for applications where extreme packaging density and/or close PC board spacing are required. Due to its minimal mass, many relays may be used to configure replacements for bulkier switching solutions at substantial savings in weight. The RF341 design has been optimized by increasing the distance between the set/reset contacts. This design improvement makes these unique relays the perfect choice for use in RF attenuators, RF switching matrices and other RF applications requiring high isolation, low insertion loss and low VSWR.
The GRF341 features a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact isolation. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability.

- Excellent Signal integrity up to 10Gbps
- Hermetically Sealed
- High Resistance to ESD
- Metal Enclosure for EMI shielding
- High Repeatability
- Broader bandwidth
- Through-hole or surface-mount configurations

Relay Type
SPDT Magnetic-Latching
Coil Type
341 = Standard Coil
Mounting
RF = Thru-hole GRF = Surface-Mount (Stub)
Temperature
Storage: −65°C to +125°C Operating: −55°C to +85°C

Part No.		Nominal Coil		Typical RF Performance			
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR (max)	Isolation Across Contacts (dB) (min)	Insertion Loss (dB) (max)
	**RF341**	5	61	DC-2	1.2 : 1	30	0.5
		12	500	2-4	1.2 : 1	25	0.8
		26	2000	4-6	1.4 : 1	20	2.0
	**GRF341**	5	61	DC-2	1.2 : 1	35	0.3
		12	500	2-4	1.3 : 1	30	0.7
		26	2000	4-6	1.4 : 1	25	1.5



341

SCHEMATIC
(Coil A Last Energized)

Schematics as viewed from terminals


© 2010 TELEDYNE RELAYS

Series RF310/RF313 Electromechanical Relays

The ultraminiature RF310 and RF313 relays are designed with an internal bypass (through path), when the coil is de-energized, to provide low insertion loss and VSWR through the bypass and simplicity of design for the user. Relays have improved RF insertion loss repeatability over the frequency range from DC to 3 GHz. Highly suitable for use in attenuator, linear amplifier and other RF circuits.

- **N.C. bypass configuration**
- **Repeatable insertion loss**
- **Broad Bandwidth**
- **Metal Enclosure for EMI shielding**
- **Ground pin option to improve ground case RF grounding**
- **High isolation between control and signal path**

Relay Type
Normally Closed Bypass
Coil Type
310 = Standard Coil
313 = Sensitive Coil
Mounting
RF = Thru-hole
Temperature
Storage: –65°C to +125°C
Operating: –55°C to +85°C



RF310
RF313


Part No.		Nominal Coil		Typical RF Performance						
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR		Isolation (dB)		Insertion Loss (dB)	
					N.O. (max)	Bypass (max)	N.O. (min)	Bypass (min)	N.O. (max)	Bypass (max)
	**RF310**	5	50	DC-1	1.2 : 1	1.3 : 1	35	25	0.2	0.3
		12	390	1-2	1.2 : 1	1.3 : 1	25	25	0.3	0.4
				2-3	1.4 : 1	1.3 : 1	25	20	0.4	0.5
	**RF313**	5	100	DC-1	1.2 : 1	1.3 : 1	35	25	0.2	0.3
		12	850	1-2	1.2 : 1	1.3 : 1	25	25	0.3	0.4
				2-3	1.5 : 1	1.3 : 1	25	20	0.5	0.4

Series RF320/RF323 Electromechanical Relays

The ultraminiature RF320 and RF323 relays are designed with an internal bypass (through path), when the coil is energized, to provide low insertion loss and VSWR through the bypass and simplicity of design for the user. The RF320 and RF323 relays have improved RF insertion loss repeatability over the frequency range from DC to 3 GHz. Highly suitable for use in attenuator, linear amplifier and other RF circuits.

- **N.O. bypass configuration**
- **Repeatable insertion loss**
- **Broad Bandwidth**
- **Metal Enclosure for EMI shielding**
- **Ground pin option to improve ground case RF grounding**
- **High isolation between control and signal path**

Relay Type
Normally Open Bypass
Coil Type
320 = Standard Coil
323 = Sensitive Coil
Mounting
RF = Thru-hole
Temperature
Storage: –65°C to +125°C
Operating: –55°C to +85°C



RF320
RF323

Part No.		Nominal Coil		Typical RF Performance						
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR		Isolation (dB)		Insertion Loss (dB)	
					N.C. (max)	Bypass (max)	N.C. (min)	Bypass (min)	N.C. (max)	Bypass (max)
	**RF320**	5	50	DC-1	1.2 : 1	1.4 : 1	30	25	0.2	0.4
		12	390	1-2	1.2 : 1	1.4 : 1	30	20	0.3	0.4
				2-3	1.4 : 1	1.4 : 1	25	20	0.4	0.6
	**RF323**	5	100	DC-1	1.2 : 1	1.4 : 1	30	25	0.2	0.4
		12	850	1-2	1.2 : 1	1.4 : 1	30	20	0.3	0.4
				2-3	1.4 : 1	1.4 : 1	25	20	0.4	0.5

Schematics as viewed from terminals

© 2010 TELEDYNE RELAYS

Series A150 Electromechanical Relays


The Series A150 ultraminiature Attenuator Relays are designed for attenuating RF signals in 50-ohm systems over a frequency range from DC to 3 GHz. Their low profile and small grid spacing makes them ideal for use when packaging density is a prime consideration. The A150 relays eliminate the need for additional external resistors.

These single section, switchable attenuator relays have internal matched thin film attenuator pads in "L," "T" or "Pi" configurations, as applicable. Relays are available in fixed increments of 1, 2, 3, 4, 5, 6, 8, 10, 16 and 20 dB, which can be used singly or in combination to achieve the attenuation levels desired.

The GA150 features a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact isolation. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability.

- Excellent phase linearity
- Hermetically Sealed
- High Resistance to ESD
- Metal Enclosure for EMI shielding
- High Repeatability
- Broader bandwidth
- Through-hole or surface-mount configurations

Relay Type
RF Attenuator
Coil Type
A150 = Standard Coil
Mounting
A = Thru-hole GA = Surface-Mount (Stub)
Temperature
Storage: –65°C to +125°C Operating: –55°C to +85°C



150

SCHEMATIC
(Bottom View)

Part No.		Nominal Coil		Typical RF Performance				
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR		Insertion Loss (dB)	
					Attenuated Path (Typ.)	Thru Path (Max.)	Typ.	Max.
	**A150**	5	50	DC-1	1.20 : 1	1.10 : 1	0.1	0.25
		12	390	1-2	1.30 : 1	1.20 : 1	0.2	0.35
		15	610	2-3	1.40 : 1	1.25 : 1	0.3	0.55
		26	1560					
	**GA150**	5	50	DC-1	1.20 : 1	1.20 : 1	0.1	0.25
		12	390	1-2	1.20 : 1	1.20 : 1	0.2	0.35
		15	610	2-3	1.20 : 1	1.30 : 1	0.3	0.45
		26	1560					

Series A152 Electromechanical Relays


The Series A152 highly repeatable ultraminiature attenuator relays are designed for attenuating RF signals in 50-ohm systems over a frequency range from DC to 5 GHz. Their low profile and small grid spacing makes them ideal for use when packaging density is a prime consideration. The A152 relays eliminate the need for additional external resistors/attenuators.

These single section, switchable attenuator relays have an internal matched thin film attenuator pad in a "Pi" configuration. Relays are available in a fixed increment of 20 dB. (Other values available)

The GA152 features a unique ground shield that isolates and shields each lead to ensure excellent contact-to-contact isolation. This ground shield provides a ground interface that results in improved high-frequency performance as well as parametric repeatability.

- Hermetically Sealed
- High Resistance to ESD
- Metal Enclosure for EMI shielding
- High Repeatability
- Broader bandwidth
- Through-hole or surface-mount configurations

Relay Type
RF Attenuator
Coil Type
A152 = Standard Coil
Mounting
A = Thru-hole GA = Surface-Mount (Stub)
Temperature
Storage: –65°C to +125°C Operating: –55°C to +85°C



152

SCHEMATIC
(Bottom View)

Part No.		Nominal Coil		Typical RF Performance				
		Voltage (Vdc)	Resistance (Ω)	Frequency (GHz)	VSWR		Insertion Loss (dB)	
					Attenuated Path (Typ.)	Thru Path (Max.)	Typ.	Max.
	**A152**	5	50	DC-1	1.20 : 1	1.10 : 1	0.1	0.25
		12	390	1-2	1.30 : 1	1.20 : 1	0.2	0.35
		15	610	2-3	1.40 : 1	1.25 : 1	0.3	0.55
		26	1560	3-5	See Datasheet			
	**GA152**	5	50	DC-1	1.20 : 1	1.20 : 1	0.1	0.25
		12	390	1-2	1.20 : 1	1.20 : 1	0.2	0.35
		15	610	2-3	1.20 : 1	1.30 : 1	0.3	0.45
		26	1560	3-5	1.40 : 1	1.70 : 1	0.4	0.55


© 2010 TELEDYNE RELAYS


Series 122C Electromechanical Relays

The 122C Centigrid® magnetic-latching relay is an ultraminiature, hermetically sealed, armature relay capable of being directly driven by most IC logic families. Its low profile height and .100" (2.54 mm) grid spaced terminals, which precludes the need for spreader pads, make it ideal for applications where extreme packaging density and/or close PC board spacing are required.
The basic operating function and internal structure are similar to Teledyne's TO-5, 422 relay series. The 122C is capable of meeting Teledyne Relays' T2R® requirements.
The Series 122C relay has internal silicon diodes for coil suppression, Zener diodes to protect the MOSFET gate inputs, and N-channel enhancement-mode MOSFET chips, which enable direct relay interfacing with most microprocessor and IC logic families (CMOS, TTL and MOS).
The 122C magnetic-latching relay is ideally suited for applications where coil operating power must be minimized. The relays can be operated with a short-duration pulse. After the contacts have transferred, no external coil power is required.
The magnetic-latching feature of the Series 122C relay provides a "memory" capability, since the relays will not reset upon removal of coil power.

- All welded construction
- Unique uni-frame design providing high magnetic efficiency and mechanical rigidity
- High force/mass ratio for resistance to shock and vibration
- Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities

Relay Type	
DPDT Magnetic-Latching	
CMOS Feature	
Internal power MOSFET driver and diode coil suppression	
Vibration	**Shock**
30 g's to 3000 Hz	100 g's 6 msec, half-sine
Acceleration	
50 g's	
Temperature	
Storage: –65°C to +125°C Operating: –55°C to +85°C	

Part No.	Nominal Coil				Contact Load Rating
	Voltage (Vdc)	Coil Current (mA) Min.	Coil Current (mA) Max.	Operating Power (mW)	Latch and Reset Voltage (Vdc) (Max)	
 122C	5	82.2	114.9	505	3.5	Resistive: 1A/28Vdc
	6	41.6	57.0	296	4.5	Inductive: 200mA/28Vdc (320mH)
	9	27.4	37.2	288	6.8	Lamp: 100mA/28Vdc
	12	20.5	27.8	287	9.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	13.7	18.2	286	13.5	
	26	11.4	15.2	351	18.0	



PIN 4: GATE A
PIN 5: – SUPPLY
PIN 9: GATE B
PIN 10: + SUPPLY

122C

SCHEMATIC
(Coil A Last Energized)


Series 172 Electromechanical Relays

The 172 Centigrid® relay is an ultraminiature, hermetically sealed, armature relay for commercial applications. Its low profile height .280" (7.11 mm) and .100" (2.54 mm) grid spaced terminals, which preclude the need for spreader pads, make it an ideal choice where extreme packaging density and/or close PC board spacing are required.
The Series 172 relay has an internal discrete silicon diode for coil transient suppression.
By virtue of its inherently low intercontact capacitance and contact circuit losses, the 172 relay is an excellent subminiature RF switch for frequencies well into the UHF spectrum. Applications include telecommunications, test instruments, mobile communications, attenuators, and automatic test equipment.


- All welded construction
- Unique uni-frame design providing high magnetic efficiency and mechanical rigidity
- High force/mass ratio for resistance to shock and vibration
- Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities

Relay Type	
DPDT Non-Latching	
Diode Options	
D = Internal diode for coil transient suppression	
Vibration	**Shock**
10 g's to 500 Hz	30 g's 6 msec, half-sine
Temperature	
Storage: –65°C to +125°C Operating: –55°C to +85°C	

Part No.	Nominal Coil				Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	Operating Power (mW)	
 172 172D	3	39	2.25	235	Resistive: 1A/28Vdc
	5	64	3.8	405	Inductive: 200mA/28Vdc (320mH)
	12	400	9.0	360	Lamp: 100mA/28Vdc
	26	1600	18.0	440	Low Level: 10 to 50 uA/10 to 50 mV



172



172D

Schematics as viewed from terminals

P.U.V = Pick-Up Voltage

© 2010 TELEDYNE RELAYS

Series 712 Electromechanical Relays

The TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board mounting, the Series 712 relays are some of the most versatile ultraminiature relays available because of their small size and low coil power dissipation.

The Series 712D relay has an internal discrete silicon diode for coil transient suppression. The hybrid Series 712TN relay has an internal silicon diode and transistor driver. The integrated packaging of the relay with its associated semiconductor devices greatly reduces PC board floor space requirements as well as component installation costs.

By virtue of its inherently low intercontact capacitance and contact circuit losses, the 712 has proven to be excellent ultraminiature RF switch for frequency ranges well into the UHF spectrum. A typical RF application for the TO-5 relay is in handheld radio transceivers, wherein the combined features of good RF performance, small size, low coil power dissipation and high reliability make it a preferred method of Transmit-Receive switching.


- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type
DPDT Non-Latching
Diode Options
D = Internal diode for coil transient suppression TN = Internal transistor driver and coil transient suppression diode


Vibration	Shock
10 g's to 500 Hz	30 g's 6 msec, half-sine

Temperature
Storage: –65°C to +125°C Operating: –55°C to +85°C


Part No.	Nominal Coil				Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	Base Current to Turn On (712 TN only)	
 **712** **712D** **712TN**	5	50	3.6	3.00	Resistive: 1A/28Vdc
	6	98	4.2	2.04	Inductive: 200mA/28Vdc (320mH)
	9	220	6.5	1.36	Lamp: 100mA/28Vdc
	12	390	8.4	1.03	Low Level: 10 to 50 uA/10 to 50 mV
	18	880	13.0	0.68	
	26	1560	17.0	0.50	



712



712D



712TN

Schematics as viewed from terminals

Series 722 Electromechanical Relays

The magnetic-latching TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board mounting, the 722 relay has become one of the most versatile ultraminiature relays available because of its small size and low coil power dissipation.

The Series 722D relay has discrete silicon diodes for coil transient suppression.

The Series 722 magnetic-latching relays are ideally suited for applications where coil power dissipation must be minimized. The relays can be operated with a short duration pulse and after the contacts have transferred, no external coil power is required. The magnetic-latching feature of the Series 722 provides a "memory" capability, since the relays will not reset upon removal of coil power.


- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type
DPDT Magnetic-Latching
Diode Options
D = Internal diode for coil transient suppression

Vibration	Shock
10 g's to 500 Hz	30 g's 6 msec, half-sine


Temperature
Storage: –65°C to +125°C Operating: –55°C to +85°C

Part No.	Nominal Coil			Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	Set & Reset Voltage (Vdc)	
 **722** **722D**	5	61	3.5	Resistive: 1A/28Vdc
	6	120	4.5	Inductive: 200mA/28Vdc (320mH)
	9	280	6.8	Lamp: 100mA/28Vdc
	12	500	9.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	13.5	
	26	2000	18.0	



722

SCHEMATIC
(Coil A Last Energized)
(Bottom View)



722D

SCHEMATIC
(Coil A Last Energized)
(Bottom View)

© 2010 TELEDYNE RELAYS

Series 732 Electromechanical Relays

The TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board mounting, the Series 732 relay is one of the most versatile ultraminiature relays available because of their small size and low coil power dissipation. The sensitive 732 relay has a high resistance coil, thus requiring extremely low operating power (200 mW typical). The advantages of reduced heat dissipation and power supply demands are a plus. The Series 732D relay has an internal discrete silicon diode for coil transient suppression. The hybrid Series 732TN relay has an internal silicon diode and transistor driver. The integrated packaging of the relay with its associated semiconductor devices greatly reduces PC board floor space requirements as well as component installation costs.

By virtue of its inherently low intercontact capacitance and contact circuit losses, the 732 has proven to be excellent ultraminiature RF switch for frequency ranges well into the UHF spectrum. A typical RF application for the TO-5 relay is in handheld radio transceivers, wherein the combined features of good RF performance, small size, low coil power dissipation and high reliability make it a preferred method of Transmit-Receive switching.


- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type
DPDT Non-Latching Coil
Diode Options
D = Internal diode for coil transient suppression TN = Internal transistor driver and coil transient suppression diode


Vibration	Shock
10 g's to 500 Hz	30 g's 6 msec, half-sine

Temperature
Storage: –65°C to +125°C Operating: –55°C to +85°C


Part No.	Nominal Coil				Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	Base Current to Turn On (712 TN only)	
 **732** **732D** **732TN**	5	100	3.5	1.50	Resistive: 1A/28Vdc
	6	200	4.5	1.00	Inductive: 200mA/28Vdc (320mH)
	9	400	6.8	0.75	Lamp: 100mA/28Vdc
	12	850	9.0	0.47	Low Level: 10 to 50 uA/10 to 50 mV
	18	1600	13.5	0.38	
	26	3300	18.0	0.24	



732



732D



732TN

Schematics as viewed from terminals

© 2010 TELEDYNE RELAYS

COMMERCIAL SURFACE-MOUNT RELAYS

Series S114 & S134 Electromechanical Relays

The Series S114 Surface Mount Centigrid® Relay is an ultraminiature, hermetically sealed, armature relay. The low profile height .360" (9.14 mm) and .100" (2.54 mm) lead spacing make it ideal for applications where extreme packaging density and/or close PC board spacing are required. The specially formed leads are pre-tinned to make the relays ideal for most types of surface mount solder reflow processes.
The basic design and internal construction are identical to the Series 114 & 134 Centigrid® relays, and are capable of meeting Teledyne Relays' T2R® requirements.
The S114D and S114DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection.
The sensitive S134 surface mount Centigrid® Relay has a high resistance coil, thus requiring extremely low operating power (200 mW typical). The advantages of reduced heat dissipation and power supply demands are a plus.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**


Relay Type
DPDT Non-Latching
Coil Type
S114 = Standard Coil
S134 = Sensitive Coil
Diode Options
D = Internal diode for coil transient suppression
DD = Internal diode for coil transient suppression and polarity reversal protection

Vibration	Shock
30 g's to 3000 Hz	75 g's 6 msec, half-sine


Acceleration
50 g's

Temperature
Storage: –65°C to +125°C
Operating: –55°C to +85°C


Part No.		Nominal Coil					Contact Load Rating
		Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
	**S114 S114D**	5	50	3.5	0.14	2.3	Resistive: 1A/28Vdc
		6	98	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
		9	220	6.8	0.35	4.9	Lamp: 100mA/28Vdc
		12	390	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	880	13.5	0.59	10.0	
		26	1560	18.0	0.89	13.0	
	**S114DD**	5	39	4.0	0.6	2.8	Resistive: 1A/28Vdc
		6	78	5.0	0.7	3.4	Inductive: 200mA/28Vdc (320mH)
		9	220	7.8	0.8	5.3	Lamp: 100mA/28Vdc
		12	390	10.0	0.9	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	880	14.5	1.1	10.0	
		26	1560	19.0	1.4	13.0	
	**S134 S134D**	5	100	3.5	0.12	2.5	Resistive: 1A/28Vdc
		6	200	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
		9	400	6.8	0.35	4.9	Lamp: 100mA/28Vdc
		12	800	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	1600	13.5	0.59	10.0	
		26	3200	18.0	0.89	13.0	
	**S134DD**	5	64	3.7	0.7	2.6	Resistive: 1A/28Vdc
		6	125	4.8	0.8	3.0	Inductive: 200mA/28Vdc (320mH)
		9	400	8.0	0.9	4.5	Lamp: 100mA/28Vdc
		12	800	11.0	1.0	5.8	Low Level: 10 to 50 uA/10 to 50 mV
		18	1600	14.5	1.1	9.0	
		26	3200	19.0	1.3	13.0	



S114
S134



S114D
S134D



S114DD
S134DD

Schematics as viewed from terminals


(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS


Series S172 Electromechanical Relays

The S172 surface mount Centigrid® relay is an ultraminiature, hermetically sealed, armature relay for commercial applications. Its low profile height .470" (11.94 mm) and .100" (2.54 mm) grid spaced terminals make it an ideal choice where extreme packaging density and/or close PC board spacing are required. The specially formed surface-mount leads are pre-tinned to make the relays ideal for all types of surface-mount solder reflow processes.
The basic design and internal structure are similar to Teledyne's DPDT 114 Centigrid® relay. (see page 16)
The S172D relay has an internal discrete silicon diode for coil transient suppression.


- All welded construction
- Unique uni-frame design providing high magnetic efficiency and mechanical rigidity
- High force/mass ratio for resistance to shock and vibration
- Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities

Relay Type	
DPDT Non-Latching	
Diode Options	
D = Internal diode for coil transient suppression	
Vibration	**Shock**
10 g's to 500 Hz	30 g's 6 msec, half-sine
Temperature	
Storage: –65°C to +125°C Operating: –55°C to +85°C	

Part No.	Nominal Coil				Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	Operating Power (mW)	
 S172 S172D	5	64	3.8	405	Resistive: 1A/28Vdc Inductive: 200mA/28Vdc (320mH) Lamp: 100mA/28Vdc Low Level: 10 to 50 uA/10 to 50 mV
	12	400	9.0	360	
	26	1600	18.0	440	



S172



S172D


Series S422 Electromechanical Relays

The magnetic-latching TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board surface mounting, its small size and low coil power dissipation make the S422 relay one of the most versatile ultraminiature relays available.
The Series S422D and S422DD utilize discrete diodes for coil suppression and polarity reversal protection.
The Series S422 magnetic-latching relays are ideally suited for applications where power dissipation must be minimized. The relays can be operated with a short duration pulse. After the contacts have transferred, no external holding power is required.
The magnetic-latching feature of the Series S422 relays provide a "memory" capability, since the relays will not reset upon removal of coil power.


- All welded construction
- Unique uni-frame design providing high magnetic efficiency and mechanical rigidity
- High force/mass ratio for resistance to shock and vibration
- Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities

Relay Type	
DPDT Magnetic-Latching	
Diode Options	
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection	
Vibration	**Shock**
10 g's to 500 Hz	30 g's 6 msec, half-sine
Temperature	
Storage: –65°C to +125°C Operating: –55°C to +85°C	


Part No.	Nominal Coil			Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	Set & Reset Voltage (Vdc)	
 S422 S422D	5	61	3.5	Resistive: 1A/28Vdc Inductive: 200mA/28Vdc (320mH) Lamp: 100mA/28Vdc Low Level: 10 to 50 uA/10 to 50 mV
	6	120	4.5	
	9	280	6.8	
	12	500	9.0	
	18	1130	13.5	
	26	2000	18.0	
 S422DD	5	48	4.5	Resistive: 1A/28Vdc Inductive: 200mA/28Vdc (320mH) Lamp: 100mA/28Vdc Low Level: 10 to 50 uA/10 to 50 mV
	6	97	5.5	
	9	280	7.8	
	12	500	10.0	
	18	1130	14.5	
	26	2000	19.0	



S422



S422D



S422DD

Schematics as viewed from terminals

SCHEMATIC (Coil A Last Energized)

SCHEMATIC (Coil A Last Energized)

SCHEMATIC (Coil A Last Energized)

© 2010 TELEDYNE RELAYS

ESTABLISHED RELIABILITY T²R RELAYS

Series ER114 Electromechanical Relays


The Series ER114 Centigrid® relay is an ultraminiature, hermetically sealed, armature relay. Its low profile height .275" (7 mm) and .100" (2.54 mm) grid spaced terminals, which precludes the need for spreader pads, make it ideal for applications where extreme packaging density and/or close PC board spacing are required. The basic design and internal construction are similar to the standard Teledyne DPDT TO-5 relay (e.g., Series ER412).

The Series ER114D and ER114DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection.

By virtue of its inherently low intercontact capacitance and contact circuit losses, the ER114 relay has proven to be an excellent ultraminiature RF switch for frequency ranges well into the UHF spectrum. A typical RF application for the ER114 relay is in handheld radio transceivers, wherein the combined features of good RF performance, small size, low coil power dissipation and high reliability make it a preferred method of Transmit-Receive switching.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type	
DPDT Non-Latching	
Diode Options	
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection	
Vibration	**Shock**
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: −65°C to +125°C

Part No.		Nominal Coil					Contact Load Rating
		Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
	ER114 ER114D	5	50	3.5	0.14	2.3	Resistive: 1A/28Vdc
		6	98	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
		9	220	6.8	0.35	4.9	Lamp: 100mA/28Vdc
		12	390	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	880	13.5	0.59	10.0	
		26	1560	18.0	0.89	13.0	
	ER114DD	5	39	4.0	0.6	2.8	Resistive: 1A/28Vdc
		6	78	5.0	0.7	3.4	Inductive: 200mA/28Vdc (320mH)
		9	220	7.8	0.8	5.3	Lamp: 100mA/28Vdc
		12	390	10.0	0.9	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	880	14.5	1.1	10.0	
		26	1560	19.0	1.4	13.0	

Series ER116C Electromechanical Relays


The ER116C Centigrid® relay is an ultraminiature, hermetically sealed, armature relay capable of being directly driven by most IC logic families. Its low profile height and .100" (2.54 mm) grid spaced terminals, which preclude the need for spreader pads, make it ideal for applications where extreme packaging density and/or close PC board spacing are required.

The Series ER116C utilizes an internal silicon diode for coil suppression, a Zener diode to protect the MOSFET gate input, and an N-channel enhancement mode MOSFET chip, which enables direct relay interfacing with most Microprocessor and IC logic families (CMOS, TTL and MOS).


- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**

Relay Type	
DPDT Non-Latching	
CMOS Feature	
Internal power MOSFET driver, Zener diode gate protection, and diode coil suppression	
Vibration	**Shock**
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: −65°C to +125°C


Part No.		Nominal Coil					Contact Load Rating
		Voltage (Vdc)	Coil Current (mA) Min.	Coil Current (mA) Max.	Operating Power (mW)	P.U.V (Vdc) (max.)	
	ER116C	5	96.5	132.3	641	4.0	Resistive: 1A/28Vdc
		6	60.3	83.9	462	4.9	Inductive: 200mA/28Vdc (320mH)
		9	33.1	47.1	368	7.3	Lamp: 100mA/28Vdc
		12	24.9	36.1	369	9.8	Low Level: 10 to 50 uA/10 to 50 mV
		18	16.1	24.1	368	14.6	
		26	12.9	19.9	450	19.5	




ER114



ER114D



ER114DD



ER116C

P.U.V = Pick-Up Voltage

Schematics as viewed from terminals

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com

© 2010 TELEDYNE RELAYS

Series ER134 Electromechanical Relays

The ER134 sensitive Centigrid® relay retains the same features as the ER114 standard Centigrid® relay with only a minimal increase in profile height .375" (9.53 mm). Its .100" (2.54 mm) grid spaced terminals, which preclude the need for spreader pads, and its low profile make the ER134 relay ideal for applications where high packaging density is important.
The Series ER134D and ER134DD have internal discrete silicon diodes for coil suppression and polarity reversal protection.
The sensitive ER134 Centigrid® relay has a high resistance coil, thus requiring extremely low operating power (200 mw typical). The advantages of reduced heat dissipation and power supply demands are a plus.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type
DPDT Non-Latching
Diode Options
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection
Vibration / **Shock**
30 g's to 3000 Hz / 75 g's 6 msec, half-sine
Acceleration / **Temperature**
50 g's / Operating & Storage: –65°C to +125°C

Part No.	Nominal Coil					Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
 ER134 ER134D	5	100	3.5	0.12	2.5	Resistive: 1A/28Vdc
	6	200	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	400	6.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	800	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
	18	1600	13.5	0.59	10.0	
	26	3200	18.0	0.89	13.0	
 ER134DD	5	64	3.7	0.7	2.6	Resistive: 1A/28Vdc
	6	125	4.8	0.8	3.0	Inductive: 200mA/28Vdc (320mH)
	9	400	8.0	0.9	4.5	Lamp: 100mA/28Vdc
	12	800	11.0	1.0	5.8	Low Level: 10 to 50 uA/10 to 50 mV
	18	1600	14.5	1.1	9.0	
	26	3200	19.0	1.3	13.0	


Series ER136C Electromechanical Relays

The sensitive ER136C Centigrid® relay is an ultraminiature, hermetically sealed, armature relay capable of being directly driven by most IC logic families. Its low profile height and .100" (2.54 mm) grid spaced terminals, which precludes the need for spreader pads, make it ideal for applications where extreme packaging density and/or close PC board spacing are required.
The sensitive ER136C Centigrid® relay has a high resistance coil, thus requiring extremely low operating power (200 mW, typical). The advantages of reduced heat dissipation and power supply demands are a plus.
The sensitive Series ER136C utilizes an internal silicon diode for coil suppression, a Zener diode to protect the MOSFET gate input, and an N-channel enhancement-mode MOSFET chip that enables direct relay interfacing with most microprocessor and IC logic families (CMOS, TTL and MOS).


- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**

Relay Type
DPDT Non-Latching
CMOS Feature
Internal power MOSFET driver, Zener diode gate protection, and diode coil suppression
Vibration / **Shock**
30 g's to 3000 Hz / 75 g's 6 msec, half-sine
Acceleration / **Temperature**
50 g's / Operating & Storage: –65°C to +125°C


Part No.	Nominal Coil					Contact Load Rating
	Voltage (Vdc)	Coil Current (mA) Min.	Coil Current (mA) Max.	Operating Power (mW)	P.U.V (Vdc) (max.)	
 ER136C	5	43.0	56.0	250	4.0	Resistive: 1A/28Vdc
	6	27.0	33.0	180	4.9	Inductive: 200mA/28Vdc (320mH)
	9	17.8	26.4	203	7.3	Lamp: 100mA/28Vdc
	12	11.3	17.7	180	9.8	Low Level: 10 to 50 uA/10 to 50 mV
	18	8.4	13.8	203	14.6	
	26	5.8	10.2	219	19.5	




ER134



ER134D



ER134DD



ER136C

Schematics as viewed from terminals

P.U.V = Pick-Up Voltage
D.O.V = Drop-Out Voltage

© 2010 TELEDYNE RELAYS

Series ER411 & ER431 Electromechanical Relays

The TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed specifically for high-density PC board mounting, its small size and low coil power dissipation make the ER411 relay one of the most versatile ultraminiature relays available.

The Series ER411D and ER411DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection. The hybrid ER411T relay features an internal silicon suppression diode and transistor driver. This hybrid package reduces required PC board floor space by reducing the number of external components needed to drive the relay.

The sensitive ER431 relay has a high resistance coil, thus requiring extremely low operating power (150 mw typical). The advantages of reduced heat dissipation and power supply demands are a plus.


The Series ER431D and ER431DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection. The hybrid ER431T relay features an internal silicon suppression diode and transistor driver. This hybrid package reduces required PC board floor space by minimizing the number of external components needed to drive the relay.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**


Relay Type
SPDT Non-Latching
Coil Type
ER411 = Standard Coil ER431 = Sensitive Coil
Diode Options
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection T = Internal transistor drive and coil transient suppression diode

Vibration	Shock
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: −65°C to +125°C


Part No.	Nominal Coil					Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
 **ER411** **ER411D**	5	63	3.7	0.15	2.4	Resistive: 1A/28Vdc
	6	125	4.5	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	280	6.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	500	9.0	0.40	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	13.5	0.58	8.4	
	26	2000	18.0	0.89	10.4	
 **ER411DD**	5	50	4.5	0.15	2.4	Resistive: 1A/28Vdc
	6	98	5.5	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	280	7.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	500	10.0	0.40	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	14.5	0.58	8.4	
	26	2000	19.0	0.89	10.4	
 **ER411T**	5	63	3.9	0.15	2.4	Resistive: 1A/28Vdc
	6	125	5.2	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	280	7.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	500	10.0	0.40	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	14.5	0.58	8.4	
	26	2000	19.0	0.89	10.4	
 **ER431** **ER431D**	5	125	3.7	0.15	2.0	Resistive: 1A/28Vdc
	6	255	4.5	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	630	6.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	1025	9.0	0.41	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	2300	13.5	0.58	8.4	
	26	4000	18.0	0.89	10.4	
 **ER431DD**	5	100	4.5	0.15	2.4	Resistive: 1A/28Vdc
	6	200	5.5	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	630	7.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	1025	10.0	0.40	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	2300	14.5	0.58	8.4	
	26	4000	19.0	0.89	10.4	
 **ER431T**	5	125	3.6	0.15	2.0	Resistive: 1A/28Vdc
	6	255	4.8	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	630	7.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	1025	10.0	0.41	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	2300	14.5	0.58	8.4	
	26	4000	19.0	0.89	10.4	




ER411
ER431



ER411D
ER431D



ER411DD
ER431DD



ER411T
ER431T

Schematics as viewed from terminals

P.U.V = Pick-Up Voltage
D.O.V = Drop-Out Voltage

ESTABLISHED RELIABILITY

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS

Series ER412 & ER432 Electromechanical Relays

The TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed specifically for high-density PC board mounting, its small size and low coil power dissipation make the ER412 relay one of the most versatile ultraminiature relays available.

The Series ER412D and ER412DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection. The hybrid ER412T relay features an internal silicon suppression diode and transistor driver. This hybrid package reduces required PC board floor space by reducing the number of external components needed to drive the relay.

The sensitive ER432 relay has a high resistance coil, thus requiring extremely low operating power (200 mw typical). The advantages of reduced heat dissipation and power supply demands are a plus.


The Series ER432D and ER432DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection. The hybrid ER432T relay features an internal silicon suppression diode and transistor driver. This hybrid package reduces required PC board floor space by minimizing the number of external components needed to drive the relay.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**


Relay Type
DPDT Non-Latching
Coil Type
ER412 = Standard Coil
ER432 = Sensitive Coil
Diode Options
D = Internal diode for coil transient suppression
DD = Internal diode for coil transient suppression and polarity reversal protection
T = Internal transistor drive and coil transient suppression diode

Vibration	Shock
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: −65°C to +125°C


Part No.	Nominal Coil					Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
 **ER412** **ER412D**	5	50	3.5	0.14	2.3	Resistive: 1A/28Vdc
	6	98	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	220	6.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	390	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 uA
	18	880	13.5	0.59	10.0	
	26	1560	18.0	0.89	13.0	
 **ER412DD**	5	39	3.9	0.6	2.8	Resistive: 1A/28Vdc
	6	78	5.2	0.7	3.4	Inductive: 200mA/28Vdc (320mH)
	9	220	7.8	0.8	5.3	Lamp: 100mA/28Vdc
	12	390	10.0	0.9	6.5	Low Level: 10 to 50 uA/10 to 50 uA
	18	880	14.5	1.1	10.0	
	26	1560	19.0	1.4	13.0	
 **ER412T**	5	50	3.5	0.14	2.3	Resistive: 1A/28Vdc
	6	98	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	220	6.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	390	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
	18	880	13.5	0.59	10.0	
	26	1560	18.0	0.89	13.0	
 **ER432** **ER432D**	5	100	3.5	0.14	2.5	Resistive: 1A/28Vdc
	6	200	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	400	6.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	850	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
	18	1600	13.5	0.59	10.0	
	26	3300	18.0	0.89	13.0	
 **ER432DD**	5	64	3.7	0.7	2.6	Resistive: 1A/28Vdc
	6	125	4.8	0.8	3.0	Inductive: 200mA/28Vdc (320mH)
	9	400	8.0	0.9	4.5	Lamp: 100mA/28Vdc
	12	850	11.0	1.0	5.8	Low Level: 10 to 50 uA/10 to 50 mV
	18	1600	14.5	1.1	9.0	
	26	3300	19.0	1.3	13.0	
 **ER432T**	5	100	3.6	0.14	2.5	Resistive: 1A/28Vdc
	6	200	4.8	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	400	7.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	850	11.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
	18	1600	14.5	0.59	10.0	
	26	3300	19.0	0.89	13.0	




ER412
ER432



ER412D
ER432D



ER412DD
ER432DD



ER412T
ER432T

Schematics as viewed from terminals

P.U.V = Pick-Up Voltage
D.O.V = Drop-Out Voltage

ESTABLISHED RELIABILITY

© 2010 TELEDYNE RELAYS

ESTABLISHED RELIABILITY T²R RELAYS

Series 255, 256, 257, 258 Electromechanical Relays

The Series 255 is an industry-standard, half-size, latching crystal can relay. It has a wide range of switching capabilities ranging from low level to 2 amps. The Series J255/255 latching relay configuration is double-pole double-throw (DPDT), so the relay offers excellent switching density and versatility.

Half-Size Crystal Can Features:


- Low level to 2 amps
- Wide range of switching capabilities
- Smallest relay package capable of switching 2 amps
- Modernized assembly process
- Lead-free (gold-plated wire lead only)

- **All welded construction**
- **Wire leads, gold-plated or solder-coated**
- **Matched seal for superior hermeticity**
- **Gold-plated contact assembly**
- **Modernized assembly process**
- **Advanced cleaning techniques**

Relay Type
DPDT Magnetic-Latching
Vibration
30G, 10-2500 Hz (Sinusoidal)
Shock
100G, 6 msec half-sine (Specified Pulse)
Temperature
Operating & Storage: –65°C to +125°C


Part No.	Nominal Coil				Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	Set & Reset Voltage (Vdc)		
			Min.	Max.	
 255, 256, 257, 258	5	45	1.0	3.8	Resistive: 2A/28Vdc
	6	63	1.3	4.5	Inductive: 0.75A/28Vdc (320mH)
	12	254	2.6	9.0	Intermediate Current: 0.1A/28Vdc
	26	1000	5.2	18.0	Lamp: 0.16A/28Vdc
	26	1000	5.2	18.0	Low Level: 10 to 50 uA/10 to 50 mV

255




SCHEMATIC
(Coil X Last Energized)
(Bottom View)

256




SCHEMATIC
(Coil X Last Energized)
(Bottom View)

257



SCHEMATIC
(Coil X Last Energized)
(Bottom View)

258



SCHEMATIC
(Coil Y Last Energized)
(Bottom View)

Series ER421 Electromechanical Relays

The magnetic-latching TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board mounting, its small size and low coil power dissipation make the ER421 relay one of the most versatile ultraminiature relays available.

The Series ER421D and ER421DD utilize discrete silicon diodes for coil suppression and polarity reversal protection.

The Series ER421 magnetic-latching relays are ideally suited for applications where coil power dissipation must be minimized. The relays can be operated with a short duration pulse. After the contacts have transferred, no external holding power is required. The magnetic-latching feature of the Series ER421 provides a "memory" capability, since the relays will not reset upon removal of coil power.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type
SPDT Magnetic-Latching
Diode Options
D = Internal diode for coil transient suppression
DD = Internal diode for coil transient suppression and polarity reversal protection

Vibration	Shock
30 g's to 3000 Hz	100 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: –65°C to +125°C

Part No.	Nominal Coil			Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	Set & Reset Voltage (Vdc)	
 ER421	5	61	3.5	Resistive: 1A/28Vdc
	6	120	4.5	Inductive: 200mA/28Vdc (320mH)
	9	280	6.8	Lamp: 100mA/28Vdc
	12	500	9.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	13.5	
	26	2000	18.0	
 ER421D	5	61	3.7	Resistive: 1A/28Vdc
	6	120	4.5	Inductive: 200mA/28Vdc (320mH)
	9	280	6.8	Lamp: 100mA/28Vdc
	12	500	9.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	13.5	
	26	2000	18.0	
 ER421DD	5	48	4.5	Resistive: 1A/28Vdc
	6	97	5.5	Inductive: 200mA/28Vdc (320mH)
	9	280	7.8	Lamp: 100mA/28Vdc
	12	500	10.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	14.5	
	26	2000	19.0	

*See Schematics on Page 21

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com

© 2010 TELEDYNE RELAYS

Series ER420 & ER422 Electromechanical Relays

The magnetic-latching TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board mounting, its small size and low coil power dissipation make the ER420 & ER422 relays some of the most versatile ultraminiature relays available.


The Series ER420D/ER422D and ER420DD/ER422DD utilize discrete silicon diodes for coil suppression and polarity reversal protection.

The Series ER420/ER422 magnetic-latching relays are ideally suited for applications where coil power dissipation must be minimized. The relays can be operated with a short duration pulse. After the contacts have transferred, no external holding power is required. The magnetic-latching feature of the Series ER420/ER422 relays provide a "memory" capability, since the relays will not reset upon removal of coil power.


- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type	
DPDT Magnetic-Latching	
Grounding Options	
420 = Individual 422 = Common	
Diode Options	
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection	
Vibration	**Shock**
30 g's to 3000 Hz	100 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: −65°C to +125°C


Part No.	Nominal Coil			Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	Set & Reset Voltage (Vdc)	
 **ER420** **ER422** **ER420D** **ER422D**	5	61	3.5	Resistive: 1A/28Vdc
	6	120	4.5	Inductive: 200mA/28Vdc (320mH)
	9	280	6.8	Lamp: 100mA/28Vdc
	12	500	9.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	13.5	
	26	2000	18.0	
 **ER420DD** **ER422DD**	5	48	4.5	Resistive: 1A/28Vdc
	6	97	5.5	Inductive: 200mA/28Vdc (320mH)
	9	280	7.8	Lamp: 100mA/28Vdc
	12	500	10.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	14.5	
	26	2000	19.0	



ER420




ER420D




ER420DD


Schematics Shown with Coil A Last Energized
Schematics as viewed from terminals




ER421




ER421D




ER421DD



ER422



ER422D



ER422DD

© 2010 TELEDYNE RELAYS

Series J114 Electromechanical Relays

The Series J114 Centigrid® relay is an ultraminiature, hermetically sealed, armature relay. Its low profile height .275" (7 mm) and .100" (2.54 mm) grid spaced terminals, which precludes the need for spreader pads, make it ideal for applications where extreme packaging density and/or close PC board spacing are required. The basic design and internal construction are similar to the standard Teledyne DPDT TO-5 relay (e.g., Series J412).

The Series J114D and J114DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection.

By virtue of its inherently low intercontact capacitance and contact circuit losses, the J114 relay has proven to be an excellent ultraminiature RF switch for frequency ranges well into the UHF spectrum. A typical RF application for the J114 relay is in handheld radio transceivers, wherein the combined features of good RF performance, small size, low coil power dissipation and high reliability make it a preferred method of Transmit-Receive switching.

- All welded construction
- Unique uni-frame design providing high magnetic efficiency and mechanical rigidity
- High force/mass ratio for resistance to shock and vibration
- Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities

Relay Type	
DPDT Non-Latching	
Diode Options	
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection	
Vibration	**Shock**
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: −65°C to +125°C

Part No.	Nominal Coil					Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
 **J114** (M39016/17) **J114D** (M39016/18)	5	50	3.5	0.14	2.3	Resistive: 1A/28Vdc
	6	98	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	220	6.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	390	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
	18	880	13.5	0.59	10.0	
	26	1560	18.0	0.89	13.0	
 **J114DD** (M39016/18)	5	39	4.0	0.6	2.8	Resistive: 1A/28Vdc
	6	78	5.0	0.7	3.4	Inductive: 200mA/28Vdc (320mH)
	9	220	7.8	0.8	5.3	Lamp: 100mA/28Vdc
	12	390	10.0	0.9	6.5	Low Level: 10 to 50 uA/10 to 50 mV
	18	880	14.5	1.1	10.0	
	26	1560	19.0	1.4	13.0	

Series J116C Electromechanical Relays

The J116C Centigrid® relay is an ultraminiature, hermetically sealed, armature relay capable of being directly driven by most IC logic families. Its low profile height and .100" (2.54 mm) grid spaced terminals, which preclude the need for spreader pads, make it ideal for applications where extreme packaging density and/or close PC board spacing are required.


The Series J116C utilizes an internal silicon diode for coil suppression, a Zener diode to protect the MOSFET gate input, and an N-channel enhancement mode MOSFET chip, which enables direct relay interfacing with most Microprocessor and IC logic families (CMOS, TTL and MOS).


- All welded construction
- Unique uni-frame design providing high magnetic efficiency and mechanical rigidity
- High force/mass ratio for resistance to shock and vibration


Relay Type	
DPDT Non-Latching	
CMOS Feature	
Internal power MOSFET driver, Zener diode gate protection, and diode coil suppression	
Vibration	**Shock**
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: −65°C to +125°C


Part No.	Nominal Coil					Contact Load Rating
	Voltage (Vdc)	Coil Current (mA) Min.	Coil Current (mA) Max.	Operating Power (mW)	P.U.V (Vdc) (max.)	
 **J116C** (M28776/6)	5	96.5	132.3	641	4.0	Resistive: 1A/28Vdc
	6	60.3	83.9	462	4.9	Inductive: 200mA/28Vdc (320mH)
	9	33.1	47.1	368	7.3	Lamp: 100mA/28Vdc
	12	24.9	36.1	369	9.8	Low Level: 10 to 50 uA/10 to 50 mV
	18	16.1	24.1	368	14.6	
	26	12.9	19.9	450	19.5	

P.U.V = Pick-Up Voltage
D.O.V = Drop-Out Voltage


J114


J114D


J114DD



J116C

Schematics as viewed from terminals

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS

Series J134 Electromechanical Relays

The J134 sensitive Centigrid® relay retains the same features as the J114 standard Centigrid® relay with only a minimal increase in profile height .375" (9.53 mm). Its .100" (2.54 mm) grid spaced terminals, which preclude the need for spreader pads, and its low profile make the J134 relay ideal for applications where high packaging density is important.

The Series J134D and J134DD have internal discrete silicon diodes for coil suppression and polarity reversal protection.

The sensitive J134 Centigrid® relay has a high resistance coil, thus requiring extremely low operating power (200 mw typical). The advantages of reduced heat dissipation and power supply demands are a plus.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type	
DPDT Non-Latching	
Diode Options	
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection	
Vibration	**Shock**
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: –65°C to +125°C

Part No.		Nominal Coil					Contact Load Rating
		Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
	**J134** (M39016/41) **J134D** (M39016/42)	5	100	3.5	0.12	2.5	Resistive: 1A/28Vdc
		6	200	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
		9	400	6.8	0.35	4.9	Lamp: 100mA/28Vdc
		12	800	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	1600	13.5	0.59	10.0	
		26	3200	18.0	0.89	13.0	
	**J134DD** (M39016/43)	5	64	3.7	0.7	2.6	Resistive: 1A/28Vdc
		6	125	4.8	0.8	3.0	Inductive: 200mA/28Vdc (320mH)
		9	400	8.0	0.9	4.5	Lamp: 100mA/28Vdc
		12	800	11.0	1.0	5.8	Low Level: 10 to 50 uA/10 to 50 mV
		18	1600	14.5	1.1	9.0	
		26	3200	19.0	1.3	13.0	

Series J136C Electromechanical Relays

The sensitive J136C Centigrid® relay is an ultraminiature, hermetically sealed, armature relay capable of being directly driven by most IC logic families. Its low profile height and .100" (2.54 mm) grid spaced terminals, which precludes the need for spreader pads, make it ideal for applications where extreme packaging density and/or close PC board spacing are required.


The sensitive J136C Centigrid® relay has a high resistance coil, thus requiring extremely low operating power (200 mW, typical). The advantages of reduced heat dissipation and power supply demands are a plus.

The sensitive Series J136C utilizes an internal silicon diode for coil suppression, a Zener diode to protect the MOSFET gate input, and an N-channel enhancement-mode MOSFET chip that enables direct relay interfacing with most microprocessor and IC logic families (CMOS, TTL and MOS).


- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type	
DPDT Non-Latching	
CMOS Feature	
Internal power MOSFET driver, Zener diode gate protection, and diode coil suppression	
Vibration	**Shock**
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: –65°C to +125°C


Part No.		Nominal Coil					Contact Load Rating
		Voltage (Vdc)	Coil Current (mA) Min.	Coil Current (mA) Max.	Operating Power (mW)	P.U.V (Vdc) (max.)	
	**J136C** (M28776/7)	5	43.0	56.0	250	4.0	Resistive: 1A/28Vdc
		6	27.0	33.0	180	4.9	Inductive: 200mA/28Vdc (320mH)
		9	17.8	26.4	203	7.3	Lamp: 100mA/28Vdc
		12	11.3	17.7	180	9.8	Low Level: 10 to 50 uA/10 to 50 mV
		18	8.4	13.8	203	14.6	
		26	5.8	10.2	219	19.5	




J134



J134D



J134DD



J136C

Schematics as viewed from terminals

P.U.V = Pick-Up Voltage
D.O.V = Drop-Out Voltage

© 2010 TELEDYNE RELAYS

Series J411 & J431 Electromechanical Relays

The TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed specifically for high-density PC board mounting, its small size and low coil power dissipation make the J411 relay one of the most versatile ultraminiature relays available.

The Series J411D and J411DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection. The hybrid J411T relay features an internal silicon suppression diode and transistor driver. This hybrid package reduces required PC board floor space by reducing the number of external components needed to drive the relay.

The sensitive J431 relay has a high resistance coil, thus requiring extremely low operating power (150 mw typical). The advantages of reduced heat dissipation and power supply demands are a plus.


The Series J431D and J431DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection. The hybrid J431T relay features an internal silicon suppression diode and transistor driver. This hybrid package reduces required PC board floor space by reducing the number of external components needed to drive the relay.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**


Relay Type
SPDT Non-Latching
Coil Type
J411 = Standard Coil J431 = Sensitive Coil
Diode Options
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection T = Internal transistor drive and coil transient suppression diode

Vibration	Shock
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: −65°C to +125°C


Part No.	Nominal Coil					Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
 **J411** (M39016/7) **J411D** (M39016/23)	5	63	3.7	0.15	2.4	Resistive: 1A/28Vdc
	6	125	4.5	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	280	6.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	500	9.0	0.40	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	13.5	0.58	8.4	
	26	2000	18.0	0.89	10.4	
 **J411DD** (M39016/24)	5	50	4.5	0.15	2.4	Resistive: 1A/28Vdc
	6	98	5.5	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	280	7.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	500	10.0	0.40	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	14.5	0.58	8.4	
	26	2000	19.0	0.89	10.4	
 **J411T** (M28776/5)	5	63	3.9	0.15	2.4	Resistive: 1A/28Vdc
	6	125	5.2	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	280	7.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	500	10.0	0.40	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	14.5	0.58	8.4	
	26	2000	19.0	0.89	10.4	
 **J431** (M39016/10) **J431D** (M39016/25)	5	125	3.7	0.15	2.0	Resistive: 1A/28Vdc
	6	255	4.5	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	630	6.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	1025	9.0	0.41	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	2300	13.5	0.58	8.4	
	26	4000	18.0	0.89	10.4	
 **J431DD** (M39016/26)	5	100	4.5	0.15	2.4	Resistive: 1A/28Vdc
	6	200	5.5	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	630	7.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	1025	10.0	0.40	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	2300	14.5	0.58	8.4	
	26	4000	19.0	0.89	10.4	
 **J431T** (M28776/4)	5	125	3.6	0.15	2.0	Resistive: 1A/28Vdc
	6	255	4.8	0.18	2.8	Inductive: 200mA/28Vdc (320mH)
	9	630	7.8	0.35	4.2	Lamp: 100mA/28Vdc
	12	1025	10.0	0.41	5.6	Low Level: 10 to 50 uA/10 to 50 mV
	18	2300	14.5	0.58	8.4	
	26	4000	19.0	0.89	10.4	




J411
J431



J411D
J431D



J411DD
J431DD



J411T
J431T

P.U.V = Pick-Up Voltage
D.O.V = Drop-Out Voltage

Schematics as viewed from terminals

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS

Series J412 & J432 Electromechanical Relays

The TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed specifically for high-density PC board mounting, its small size and low coil power dissipation make the J412 relay one of the most versatile ultraminiature relays available.


The Series J412D and J412DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection. The hybrid J412T relay features an internal silicon suppression diode and transistor driver. This hybrid package reduces required PC board floor space by reducing the number of external components needed to drive the relay.

The sensitive J432 relay has a high resistance coil, thus requiring extremely low operating power (200 mw typical). The advantages of reduced heat dissipation and power supply demands are a plus.


The Series J432D and J432DD relays have internal discrete silicon diodes for coil suppression and polarity reversal protection. The hybrid J432T relay features an internal silicon suppression diode and transistor driver. This hybrid package reduces required PC board floor space by reducing the number of external components needed to drive the relay.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**


Relay Type	
DPDT Non-Latching	
Coil Type	
J412 = Standard Coil	
J432 = Sensitive Coil	
Diode Options	
D = Internal diode for coil transient suppression	
DD = Internal diode for coil transient suppression and polarity reversal protection	
T = Internal transistor drive and coil transient suppression diode	
Vibration	**Shock**
30 g's to 3000 Hz	75 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: −65°C to +125°C




J412
J432



J412D
J432D



J412DD
J432DD



J412T
J432T

Part No.	Nominal Coil: Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	Contact Load Rating
 **J412** (M39016/9) **J412D** (M39016/15)	5	50	3.5	0.14	2.3	Resistive: 1A/28Vdc
	6	98	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	220	6.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	390	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 uA
	18	880	13.5	0.59	10.0	
	26	1560	18.0	0.89	13.0	
 **J412DD** (M39016/20)	5	39	3.9	0.6	2.8	Resistive: 1A/28Vdc
	6	78	5.2	0.7	3.4	Inductive: 200mA/28Vdc (320mH)
	9	220	7.8	0.8	5.3	Lamp: 100mA/28Vdc
	12	390	10.0	0.9	6.5	Low Level: 10 to 50 uA/10 to 50 uA
	18	880	14.5	1.1	10.0	
	26	1560	19.0	1.4	13.0	
 **J412T** (M28776/1)	5	50	3.5	0.14	2.3	Resistive: 1A/28Vdc
	6	98	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	220	6.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	390	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
	18	880	13.5	0.59	10.0	
	26	1560	18.0	0.89	13.0	
 **J432** (M39016/11) **J432D** (M39016/16)	5	100	3.5	0.14	2.5	Resistive: 1A/28Vdc
	6	200	4.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	400	6.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	850	9.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
	18	1600	13.5	0.59	10.0	
	26	3300	18.0	0.89	13.0	
 **J432DD** (M39016/21)	5	64	3.7	0.7	2.6	Resistive: 1A/28Vdc
	6	125	4.8	0.8	3.0	Inductive: 200mA/28Vdc (320mH)
	9	400	8.0	0.9	4.5	Lamp: 100mA/28Vdc
	12	850	11.0	1.0	5.8	Low Level: 10 to 50 uA/10 to 50 mV
	18	1600	14.5	1.1	9.0	
	26	3300	19.0	1.3	13.0	
 **J432T** (M28776/3)	5	100	3.6	0.14	2.5	Resistive: 1A/28Vdc
	6	200	4.8	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
	9	400	7.8	0.35	4.9	Lamp: 100mA/28Vdc
	12	850	11.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
	18	1600	14.5	0.59	10.0	
	26	3300	19.0	0.89	13.0	

Schematics as viewed from terminals

P.U.V = Pick-Up Voltage
D.O.V = Drop-Out Voltage

© 2010 TELEDYNE RELAYS

Series J255 Electromechanical Relays

The Series J255 is an industry-standard, half-size, latching crystal can relay. It has a wide range of switching capabilities ranging from low level to 2 amps. The Series J255 latching relay configuration is double-pole double-throw (DPDT), so the relay offers excellent switching density and versatility.

Half-Size Crystal Can Features:


- Low level to 2 amps
- Wide range of switching capabilities
- Smallest relay package capable of switching 2 amps
- Modernized assembly process
- Qualified to MIL-PRF39016/45
- Lead-free (gold-plated wire lead only)

- **All welded construction**
- **Wire leads, gold-plated or solder-coated**
- **Matched seal for superior hermeticity**
- **Gold-plated contact assembly**
- **Modernized assembly process**
- **Advanced cleaning techniques**

Relay Type
DPDT Magnetic-Latching
Vibration
30G, 10-2500 Hz (Sinusoidal)
Shock
100G, 6 msec half-sine (Specified Pulse)
Temperature
Operating & Storage: –65°C to +125°C

Part No.	Nominal Coil				Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	Set & Reset Voltage (Vdc) Min.	Set & Reset Voltage (Vdc) Max.	
 **J255 (M39016/45)**	5	45	1.0	3.8	Resistive: 2A/28Vdc
	6	63	1.3	4.5	Inductive: 0.75A/28Vdc (320mH)
	12	254	2.6	9.0	Intermediate Current: 0.1A/28Vdc
	26	1000	5.2	18.0	Lamp: 0.16A/28Vdc
					Low Level: 10 to 50 uA/10 to 50 mV

J255



SCHEMATIC
(Coil X Last Energized)
(Bottom View)

Series J421 Electromechanical Relays

The magnetic-latching TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board mounting, its small size and low coil power dissipation make the J421 relay one of the most versatile ultraminiature relays available.

The Series J421D and J421DD utilize discrete silicon diodes for coil suppression and polarity reversal protection.

The Series J421 magnetic-latching relays are ideally suited for applications where coil power dissipation must be minimized. The relays can be operated with a short duration pulse. After the contacts have transferred, no external holding power is required. The magnetic-latching feature of the Series J421 provides a "memory" capability, since the relays will not reset upon removal of coil power.

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type
SPDT Magnetic-Latching
Diode Options
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection
Vibration / **Shock**
30 g's to 3000 Hz / 100 g's 6 msec, half-sine
Acceleration / **Temperature**
50 g's / Operating & Storage: –65°C to +125°C

Part No.	Nominal Coil			Contact Load Rating
	Voltage (Vdc)	Resistance (Ω)	Set & Reset Voltage (Vdc)	
 **J421 (M39016/8)**	5	61	3.5	Resistive: 1A/28Vdc
	6	120	4.5	Inductive: 200mA/28Vdc (320mH)
	9	280	6.8	Lamp: 100mA/28Vdc
	12	500	9.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	13.5	
	26	2000	18.0	
 **J421D (M39016/27)**	5	61	3.7	Resistive: 1A/28Vdc
	6	120	4.5	Inductive: 200mA/28Vdc (320mH)
	9	280	6.8	Lamp: 100mA/28Vdc
	12	500	9.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	13.5	
	26	2000	18.0	
 **J421DD (M39016/28)**	5	48	4.5	Resistive: 1A/28Vdc
	6	97	5.5	Inductive: 200mA/28Vdc (320mH)
	9	280	7.8	Lamp: 100mA/28Vdc
	12	500	10.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	14.5	
	26	2000	19.0	

*See Schematics on Page 27

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com

© 2010 TELEDYNE RELAYS

Series J420 & J422 Electromechanical Relays

The magnetic-latching TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board mounting, its small size and low coil power dissipation make the J420 & J422 relays some of the most versatile ultraminiature relays available.


The Series J420D/J422D and J420DD/J422DD utilize discrete silicon diodes for coil suppression and polarity reversal protection.

The Series J420/J422 magnetic-latching relays are ideally suited for applications where coil power dissipation must be minimized. The relays can be operated with a short duration pulse. After the contacts have transferred, no external holding power is required. The magnetic-latching feature of the Series J420/J422 relays provide a "memory" capability, since the relays will not reset upon removal of coil power.


- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type	
DPDT Magnetic-Latching	
Grounding Options	
J420 = Individual J422 = Common	
Diode Options	
D = Internal diode for coil transient suppression DD = Internal diode for coil transient suppression and polarity reversal protection	
Vibration	**Shock**
30 g's to 3000 Hz	100 g's 6 msec, half-sine
Acceleration	**Temperature**
50 g's	Operating & Storage: –65°C to +125°C


Part No.	Nominal Coil Voltage (Vdc)	Nominal Coil Resistance (Ω)	Nominal Coil Set & Reset Voltage (Vdc)	Contact Load Rating
 **J420** (M39016/12) **J422** (M39016/12) **J420D** (M39016/29) **J422D** (M39016/29)	5	61	3.5	Resistive: 1A/28Vdc
	6	120	4.5	Inductive: 200mA/28Vdc (320mH)
	9	280	6.8	Lamp: 100mA/28Vdc
	12	500	9.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	13.5	
	26	2000	18.0	
 **J420DD** (M39016/30) **J422DD** (M39016/30)	5	48	4.5	Resistive: 1A/28Vdc
	6	97	5.5	Inductive: 200mA/28Vdc (320mH)
	9	280	7.8	Lamp: 100mA/28Vdc
	12	500	10.0	Low Level: 10 to 50 uA/10 to 50 mV
	18	1130	14.5	
	26	2000	19.0	



J420




J420D




J420DD


Schematics Shown with Coil A Last Energized
Schematics as viewed from terminals




J421




J421D




J421DD



J422



J422D



J422DD

© 2010 TELEDYNE RELAYS

Series 412H, 422H & 432H Electromechanical Relays - High Temperature

The TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board mounting, these TO-5 relays are some of the most versatile ultraminiature relays available because of their small size and low coil power dissipation.

The H Series high-temperature TO-5 relays are designed for reliable operation in elevated ambient temperatures up to 200°C. Special material selection and processing provide assurance of freedom from contact contamination and mechanical malfunctioning that might otherwise be caused by ultra high ambient temperature conditions.

Typical applications:


- Oil exploration (down-hole) instrumentation
- High-Temperature industrial and process control instrumentation

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**


Relay Type
412H = DPDT Non-Latching
432H = DPDT Non-Latching
422H = DPDT Magnetic-Latching
Coil Type
412H = Standard Coil
422H = Standard Coil
432H = Sensitive Coil
Vibration
30 g's to 3000 Hz
Shock
412H = 75 g's 6 msec, half-sine
432H = 75 g's 6 msec, half-sine
422H = 100 g's
Acceleration
50 g's
Temperature
Operating & Storage: –65°C to +200°C

Part No.		Nominal Coil					Contact Load Rating
		Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
	**412H**	5	50	4.7	0.14	2.4	Resistive: 1A/28Vdc
		6	98	5.9	0.18	3.4	Inductive: 200mA/28Vdc (320mH)
		9	220	9.0	0.35	5.1	Lamp: 100mA/28Vdc
		12	390	11.9	0.41	6.8	Low Level: 10 to 50 uA/10 to 50 mV
		18	880	17.8	0.59	10.2	
		26	1560	24.0	0.89	13.5	
	**432H**	5	100	4.7	0.14	2.4	Resistive: 1A/28Vdc
		6	200	5.9	0.18	3.4	Inductive: 200mA/28Vdc (320mH)
		9	400	9.0	0.35	5.1	Lamp: 100mA/28Vdc
		12	850	11.9	0.41	6.8	Low Level: 10 to 50 uA/10 to 50 mV
		18	1600	17.8	0.59	10.2	
		26	3300	24.0	0.89	13.5	

Part No.		Nominal Coil			Contact Load Rating
		Voltage (Vdc)	Resistance (Ω)	Set & Reset Voltage (Vdc)	
	**422H**	5	61	4.7	Resistive: 1A/28Vdc
		6	120	5.9	Inductive: 200mA/28Vdc (320mH)
		9	280	9.0	Lamp: 100mA/28Vdc
		12	500	11.9	Low Level: 10 to 50 uA/10 to 50 mV
		18	1130	17.8	
		26	2000	24.0	



412H
432H



SCHEMATIC
(Coil A Last Energized)

422H

Schematics as viewed from terminals

P.U.V = Pick-Up Voltage

D.O.V = Drop-Out Voltage

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com

© 2010 TELEDYNE RELAYS

Series 412K & 422K Electromechanical Relays - High Shock

The TO-5 relay, originally conceived and developed by Teledyne, has become one of the industry standards for low-level switching from dry circuit to 1 ampere. Designed for high-density PC board mounting, its small size and low coil power dissipation make the TO-5 relay one of the most versatile subminiature relays available.

The K Series high-shock TO-5 relays are designed to withstand shock levels up to 4000 g's, .5 msec duration. Special material selection and construction details provide assurance that critical elements of the relay structure and mechanism will not be permanently displaced or damaged as a result of extremely high g level shocks.

Typical applications:


- Commercial avionics aircraft control
- Commercial aircraft control systems
- Transportation systems (rail/truck)

- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**


Relay Type
412K = DPDT Non-Latching
422K = DPDT Magnetic-Latching
Vibration
30 g's to 3000 Hz
Shock
412K = 75 g's 6 msec, half-sine
4000 g's, 0.5 msec axial plane, half-sine
1000 g's, 0.5 msec side planes, half-sine
422K = 100 g's 6 msec, half-sine
2100 g's, 0.5 msec axial plane, half-sine
750 g's, 0.5 msec side planes, half-sine
Acceleration
50 g's
Temperature
Operating & Storage:
–65°C to +125°C

Part No.		Nominal Coil					Contact Load Rating
		Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
	**412K**	5	50	4.3	0.14	2.5	Resistive: 1A/28Vdc
		6	80	5.2	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
		9	160	7.6	0.35	4.9	Lamp: 100mA/28Vdc
		12	300	10.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	600	14.3	0.59	10.0	
		26	1350	21.0	0.89	13.0	

Part No.		Nominal Coil			Contact Load Rating
		Voltage (Vdc)	Resistance (Ω)	Set & Reset Voltage (Vdc)	
	**422K**	5	61	3.5	Resistive: 1A/28Vdc
		6	120	4.5	Inductive: 200mA/28Vdc (320mH)
		9	280	6.8	Lamp: 100mA/28Vdc
		12	500	9.0	Low Level: 10 to 50 uA/10 to 50 mV
		18	1130	13.5	
		26	2000	18.0	



412K



SCHEMATIC
(Coil A Last Energized)

422K

Schematics as viewed from terminals
P.U.V = Pick-Up Voltage
D.O.V = Drop-Out Voltage

© 2010 TELEDYNE RELAYS

Series 412V & 432V Electromechanical Relays - High Vibration

The 412V and 432V TO-5 relays, originally conceived and developed by Teledyne, have become the industry standards for low level switching from dry circuit to 1 ampere in high-vibration environments. Designed for high-density PC board mounting, these TO-5 relays are some of the most versatile ultraminiature relay available because of their small size and low coil power dissipation.

The V Series high-vibration relays are designed to withstand vibration levels of 250 to 380 g's at the frequencies noted, when tested on a resonant beam for 10 to 20 seconds, in the axis parallel to contact motion (x-axis), or 100 g's 10-2000 Hz for 20 minutes in the x-axis. A unique magnetic circuit prevents contact opening (chatter) in excess of 10 microseconds under vibration or shock conditions.


Typical applications:

- Avionics aircraft control
- Aircraft control systems
- Transportation systems (rail/truck)


- **All welded construction**
- **Unique uni-frame design providing high magnetic efficiency and mechanical rigidity**
- **High force/mass ratio for resistance to shock and vibration**
- **Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities**

Relay Type
DPDT Non-Latching
Coil Type
412V = Standard Coil
432V = Sensitive Coil
Diode Options
D = Internal diode for coil transient suppression
DD = Internal diode for coil transient suppression and polarity reversal protection
Vibration
250 g's at 140 ±5 Hz
350 g's at 170 ±5 Hz
380 g's at 200 ±5 Hz
Shock
150 g's 11 msec, half-sine
Acceleration
50 g's
Temperature
Operating & Storage: −65°C to +125°C


Part No.		Nominal Coil					Contact Load Rating
		Voltage (Vdc)	Resistance (Ω)	P.U.V (Vdc) (max.)	D.O.V (Vdc) min.	D.O.V (Vdc) max.	
	**412V** **412DV**	5	50	4.6	0.14	2.3	Resistive: 1A/28Vdc
		6	70	5.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
		9	155	8.2	0.35	4.9	Lamp: 100mA/28Vdc
		12	235	11.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	610	16.5	0.59	10.0	
		26	1130	22.0	0.89	13.0	
	**412DDV**	5	33	4.6	0.6	2.8	Resistive: 1A/28Vdc
		6	44	5.5	0.7	3.4	Inductive: 200mA/28Vdc (320mH)
		9	125	8.2	0.8	5.3	Lamp: 100mA/28Vdc
		12	215	11.0	0.9	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	470	16.5	1.1	10.0	
		26	1050	22.0	1.4	13.0	
	**432V** **432DV**	5	80	4.6	0.14	2.5	Resistive: 1A/28Vdc
		6	120	5.5	0.18	3.2	Inductive: 200mA/28Vdc (320mH)
		9	240	8.2	0.35	4.9	Lamp: 100mA/28Vdc
		12	480	11.0	0.41	6.5	Low Level: 10 to 50 uA/10 to 50 mV
		18	950	16.5	0.59	10.0	
		26	1900	22.0	0.89	13.0	



412V
432V



412DV
432DV



412DDV

Schematics as viewed from terminals


P.U.V = Pick-Up Voltage
D.O.V = Drop-Out Voltage

© 2010 TELEDYNE RELAYS

APPENDIX: SIGNAL INTEGRITY EYE DIAGRAMS


SERIES RF100

Normally Closed

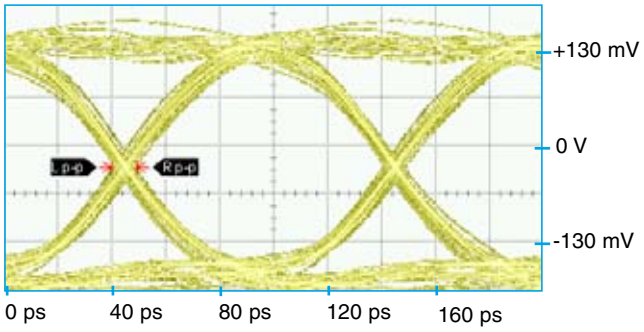

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
233.7 mV	88.88 ps	13.01	9.33 ps


Normally Open

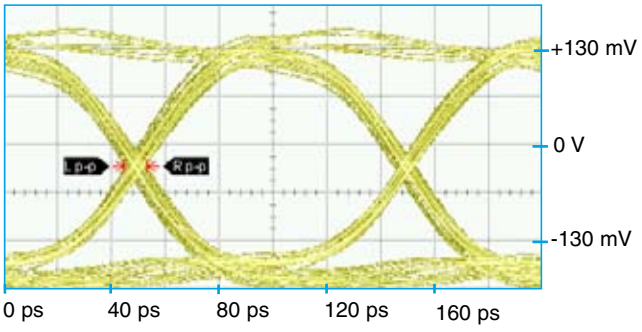

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
217.1 mV	88.05 ps	11.55	8.44 ps


SERIES GRF100

Normally Closed

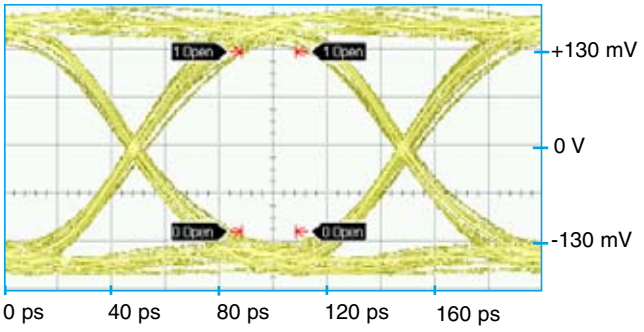

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
242.5 mV	90.09 ps	14.20	8.44 ps


Normally Open

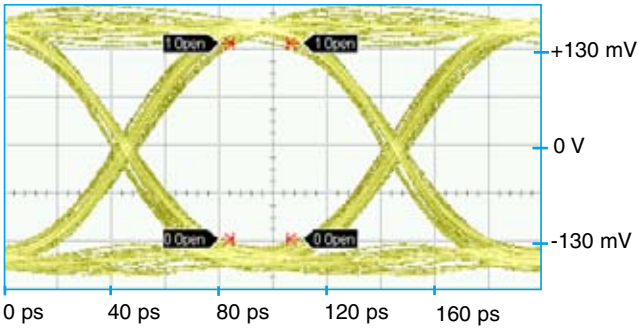

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
263.6 mV	87.29 ps	20.23	9.78 ps


SERIES SGRF100

Normally Closed

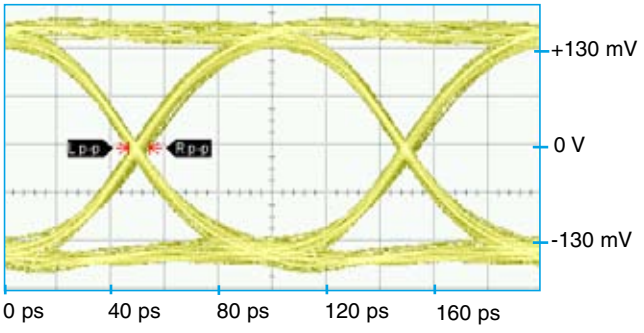

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
251.5 mV	92.04 ps	15.11	8.00 ps

Normally Open

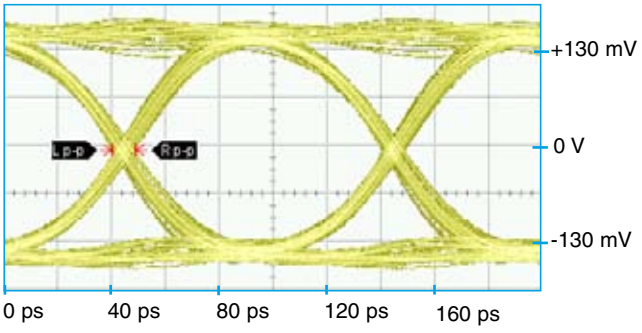


Eye Height	Eye Width	SNR	$Jitter_{P-P}$
261.2 mV	87.64 ps	18.20	8.44 ps

APPENDIX: SIGNAL INTEGRITY EYE DIAGRAMS


SERIES GRF172

Normally Closed

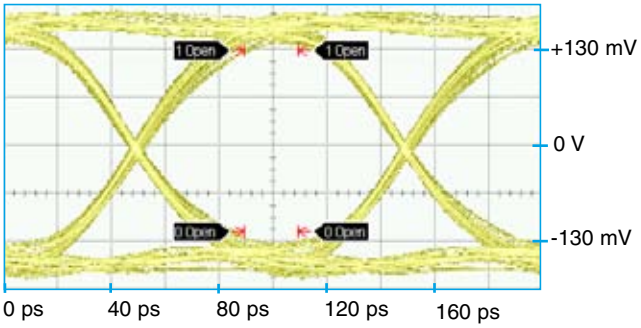

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
246.1 mV	92.45 ps	14.59	6.22 ps


Normally Open

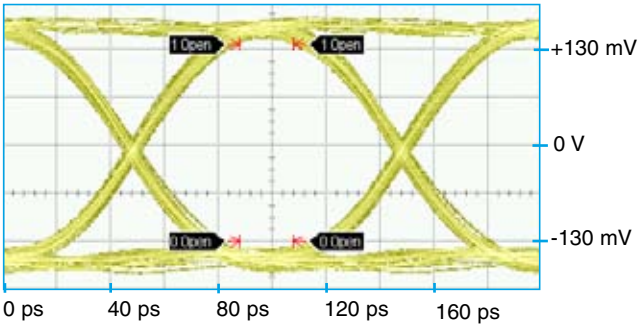

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
268.2 mV	90.87 ps	21.62	7.56


SERIES RF300/RF303

Normally Closed

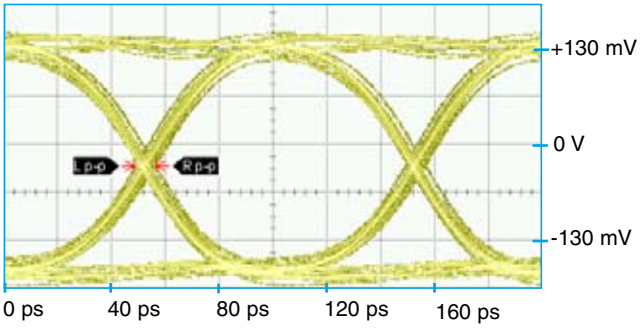

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
254.7 mV	90.38 ps	18.52	8.44 ps


Normally Open

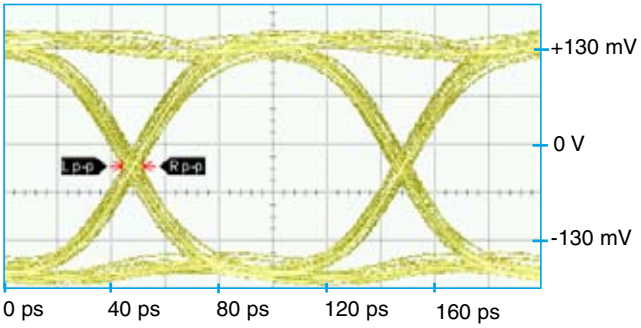

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
250.9 mV	88.21 ps	16.84	8.00 ps


SERIES GRF300/GRF303

Normally Closed

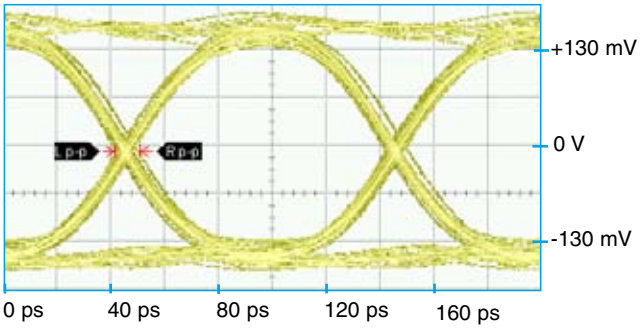

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
237.6 mV	90.08 ps	14.19	9.33 ps

Normally Open

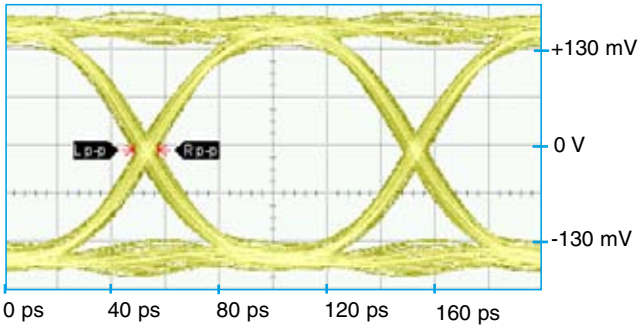


Eye Height	Eye Width	SNR	Jitter$_{P-P}$
255.2 mV	88.93 ps	17.74	8.89 ps

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS

APPENDIX: SIGNAL INTEGRITY EYE DIAGRAMS


SERIES SGRF300/SGRF303

Normally Closed

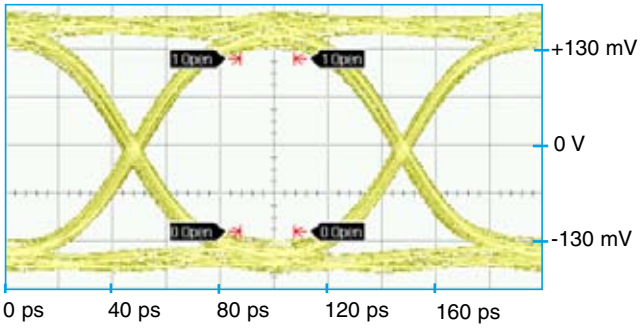

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
233.3 mV	89.08 ps	13.18	7.56 ps


Normally Open

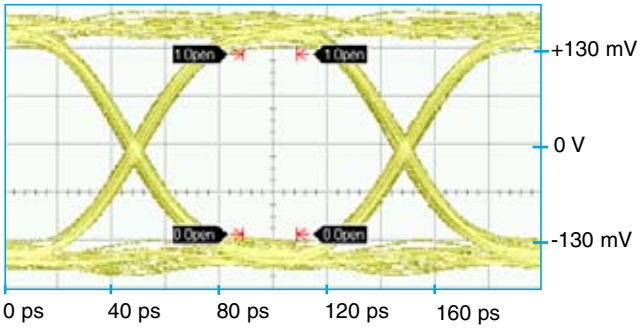

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
243.1 mV	90.29 ps	15.21	7.56 ps


SERIES SRF300/SRF303

Normally Closed

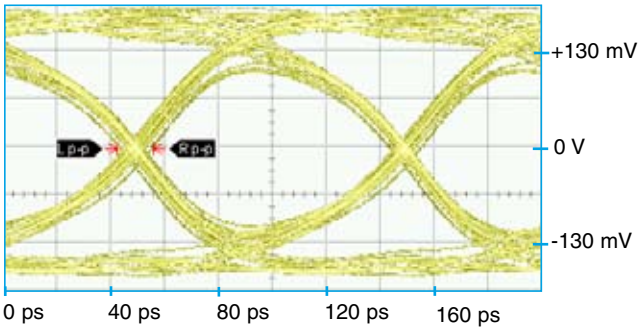

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
137.9 mV	85.83 ps	6.31	13.33 ps


Normally Open

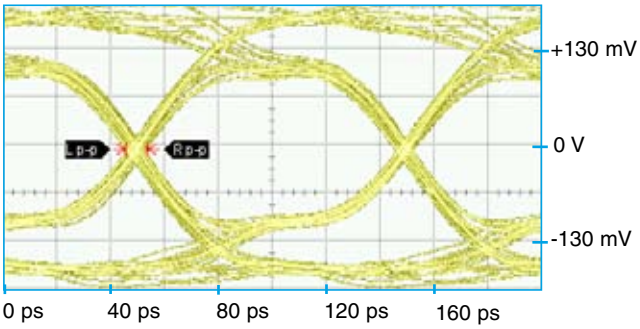

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
72.8 mV	88.1 ps	4.31	8.00 ps


SERIES RF312

Normally Closed

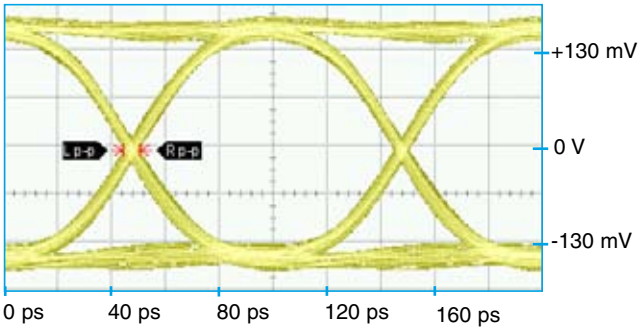

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
266.5 mV	89.21 ps	19.44	9.78 ps

Normally Open

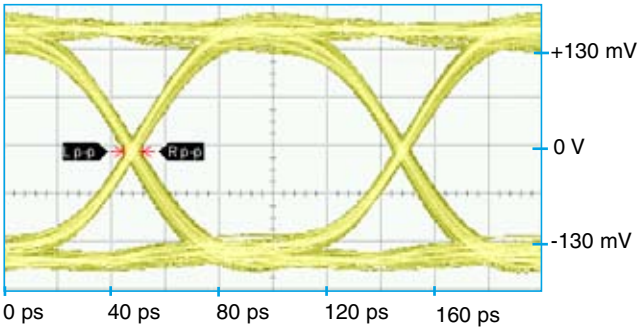


Eye Height	Eye Width	SNR	$Jitter_{P-P}$
264.3 mV	89.07 ps	19.13	8.00 ps

APPENDIX: SIGNAL INTEGRITY EYE DIAGRAMS


SERIES GRF312

Normally Closed

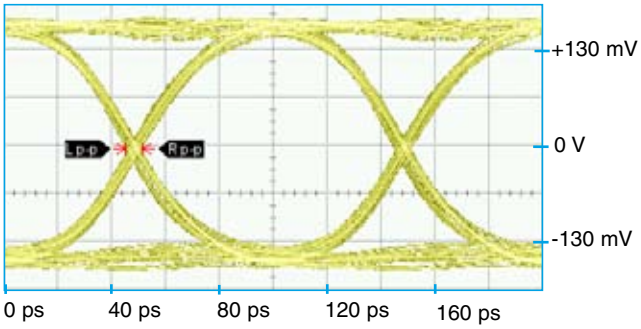

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
266.5 mV	91.09 ps	20.75	6.22 ps


Normally Open

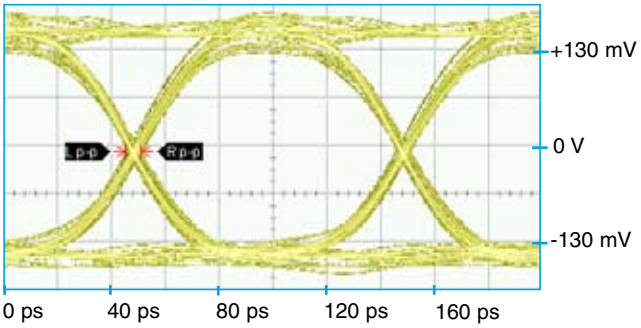

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
239.6 mV	92.77 ps	14.52	5.78 ps


SERIES SGRF312

Normally Closed

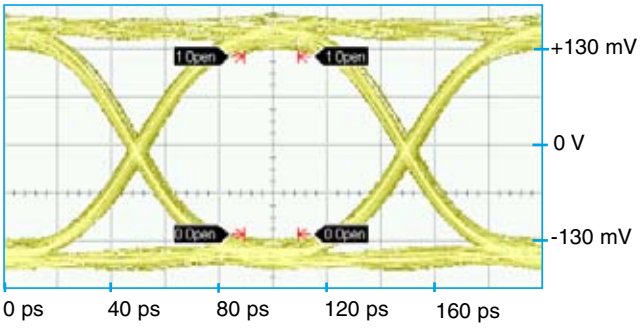

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
240.7 mV	91.44 ps	15.49	8.44 ps


Normally Open

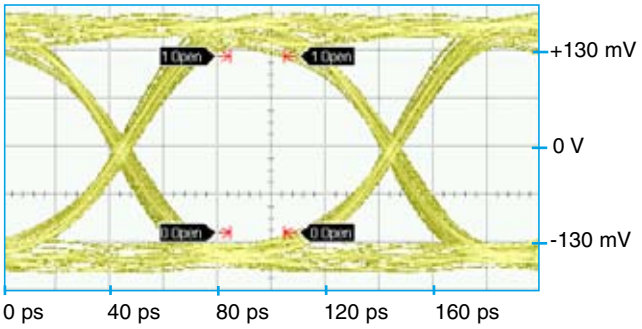

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
237.1 mV	89.08 ps	13.72	8.00 ps


SERIES RF311/RF331

Normally Closed

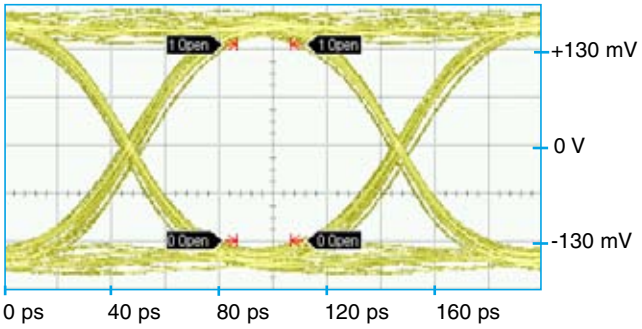

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
266.5 mV	89.21 ps	19.44	9.78 ps

Normally Open

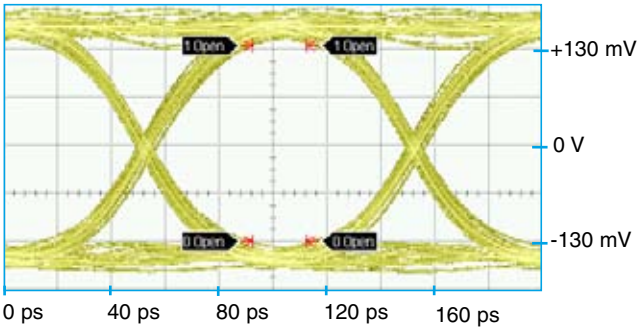


Eye Height	Eye Width	SNR	Jitter$_{P-P}$
264.3 mV	89.07 ps	19.13	8.00 ps

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS

APPENDIX: SIGNAL INTEGRITY EYE DIAGRAMS


SERIES GRF311

Normally Closed

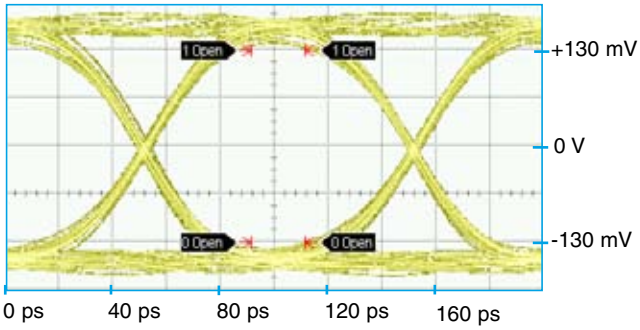

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
260.0 mV	92.32 ps	17.98	6.67 ps


Normally Open

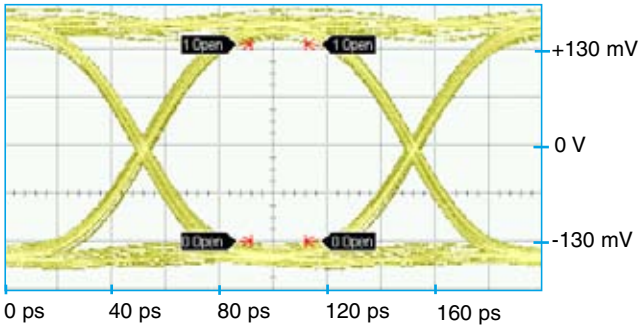

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
267.2 mV	90.99 ps	20.84	7.11 ps


SERIES GRF342

Normally Closed

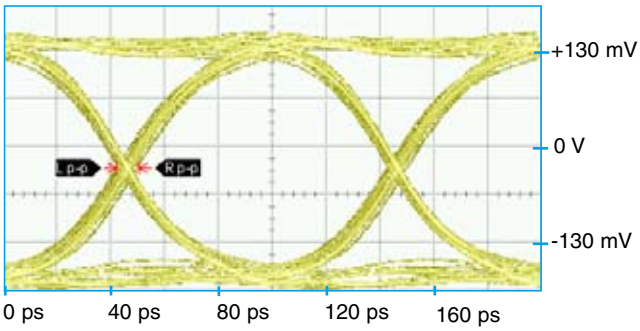

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
252.9 mV	90.74 ps	16.53	8.44 ps


Normally Open

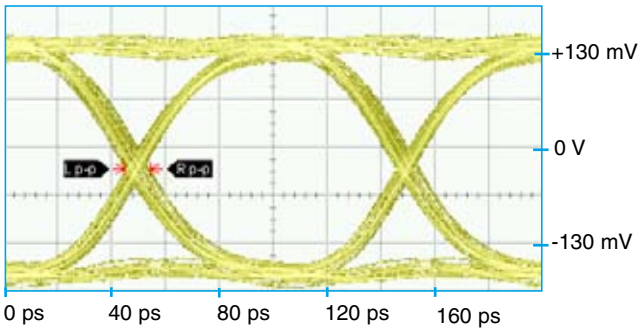

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
253.1 mV	87.31 ps	17.57	9.78 ps


SERIES RF180

Normally Closed

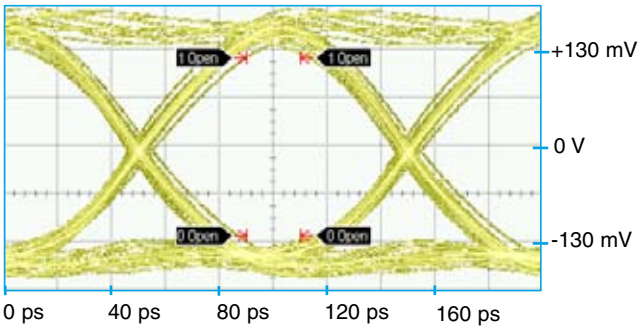

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
240.5 mV	88.16 ps	13.86	10.67 ps

Normally Open

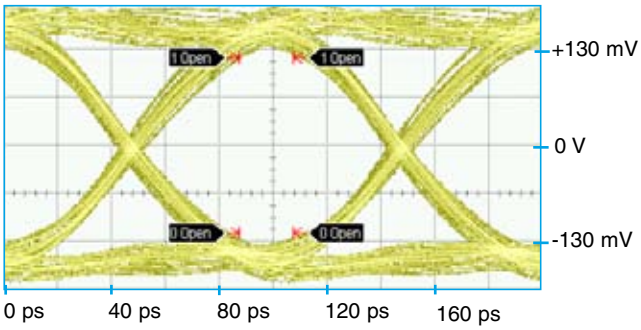


Eye Height	Eye Width	SNR	$Jitter_{P-P}$
235.8 mV	87.22 ps	12.75	10.22 ps

APPENDIX: SIGNAL INTEGRITY EYE DIAGRAMS


SERIES RF341

Normally Closed

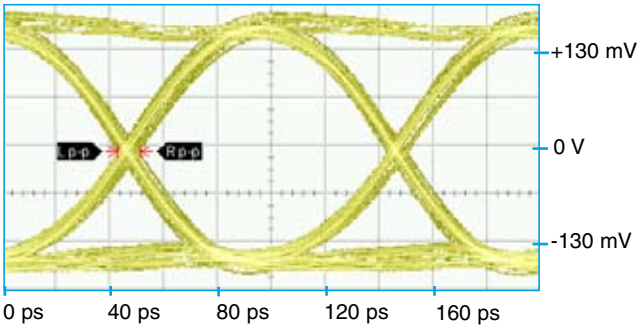

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
260.9 mV	88.26 ps	18.39	8.44 ps


Normally Open

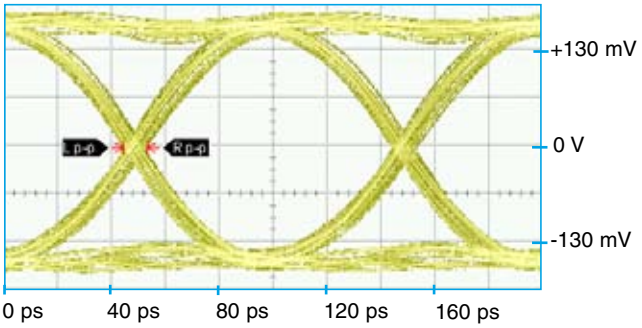

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
271.5 mV	86.41 ps	21.35	8.89 ps


SERIES GRF341

Normally Closed

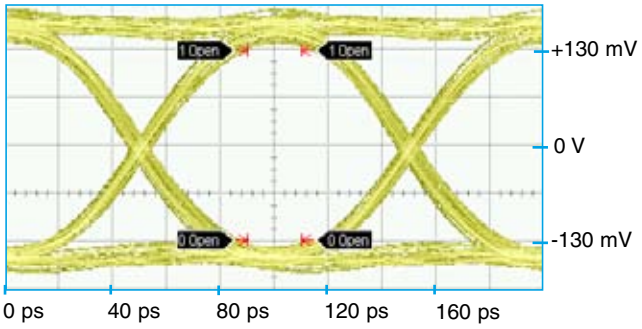

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
256.2 mV	87.70 ps	17.15	8.89 ps


Normally Open

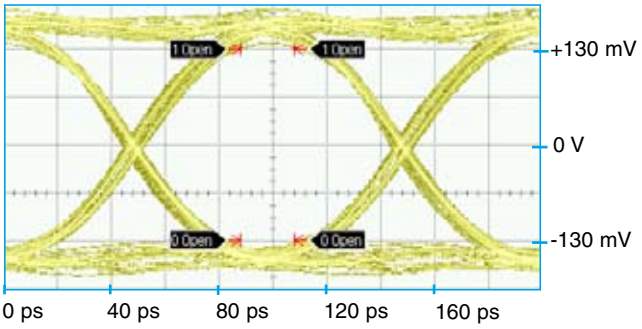

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
259.9 mV	88.39 ps	17.59	8.00 ps


SERIES RF310/RF313

Normally Closed

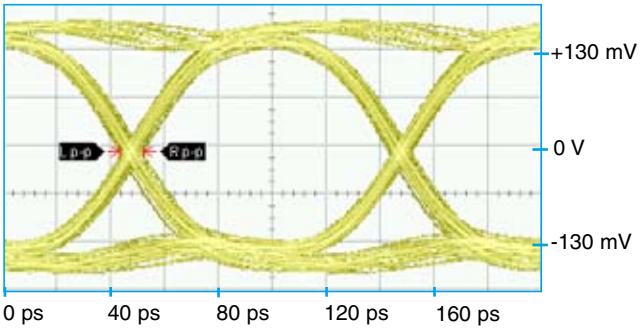

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
246.1 mV	92.45 ps	14.59	6.22 ps

Normally Open

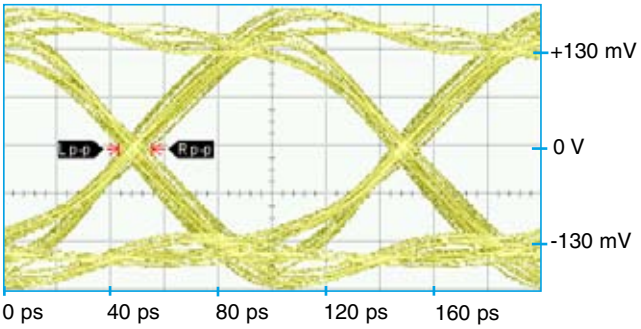


Eye Height	Eye Width	SNR	$Jitter_{P-P}$
268.2 mV	90.87 ps	21.62	7.56 ps

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS

APPENDIX: SIGNAL INTEGRITY EYE DIAGRAMS


SERIES RF320/RF323

Normally Closed

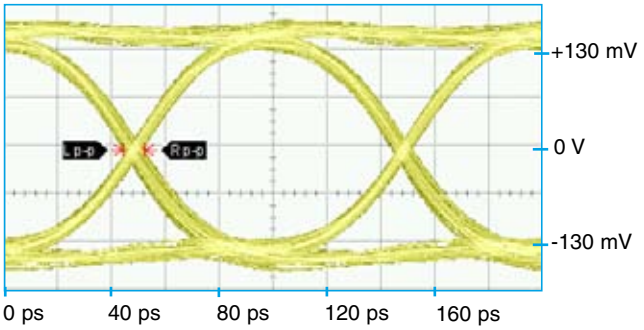

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
246.1 mV	92.45 ps	14.59	6.22 ps


Normally Open

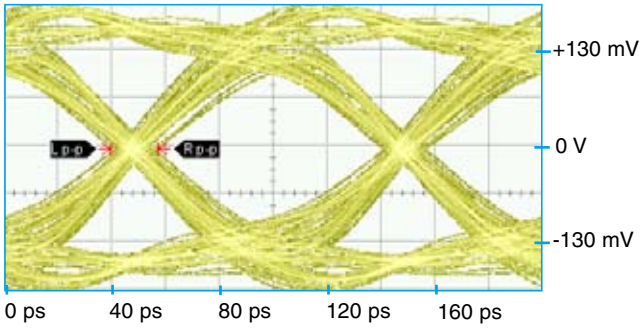

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
268.2 mV	90.87 ps	21.62	7.56 ps


SERIES A150

Attenuated Path

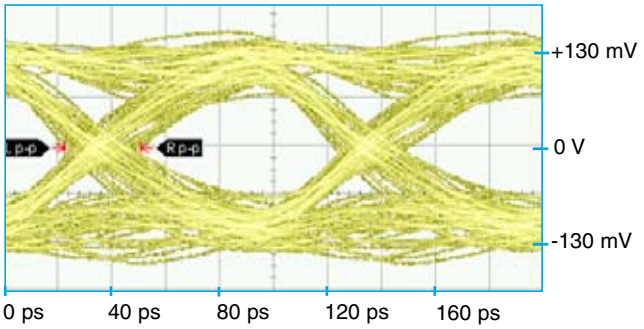

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
45.59 mV	64.18 ps	5.70	28.00 ps


Thru Path

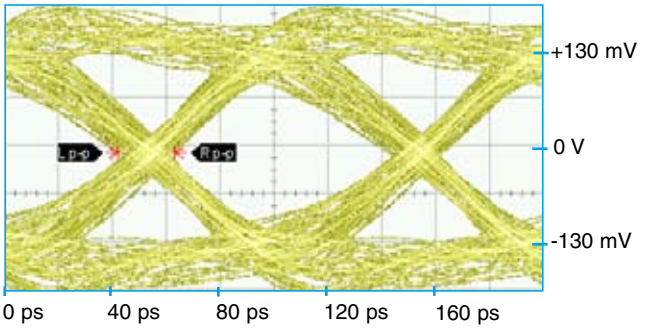

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
130.2 mV	72.87 ps	5.29	20.89 ps


SERIES GA150

Attenuated Path

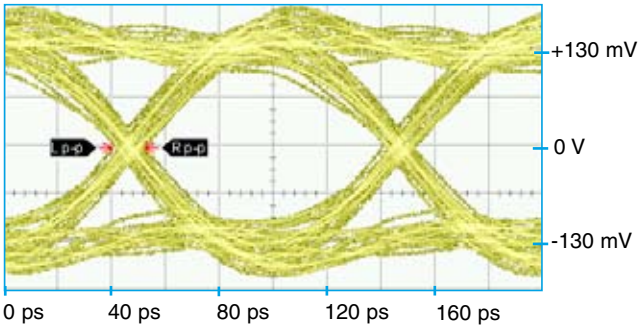

Eye Height	Eye Width	SNR	$Jitter_{P-P}$
62.10 mV	83.23 ps	7.14	12.89 ps

Thru Path

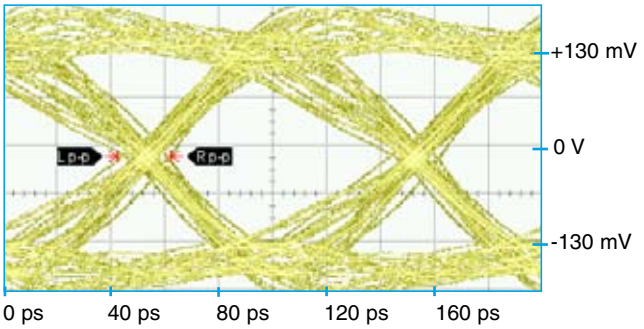


Eye Height	Eye Width	SNR	$Jitter_{P-P}$
130.3 mV	78.38 ps	5.30	19.56 ps

APPENDIX: SIGNAL INTEGRITY EYE DIAGRAMS


SERIES A152

Attenuated Path

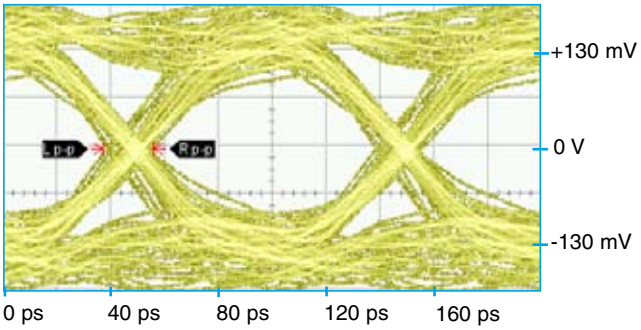

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
45.10 mV	78.94 ps	5.57	18.67 ps


Thru Path

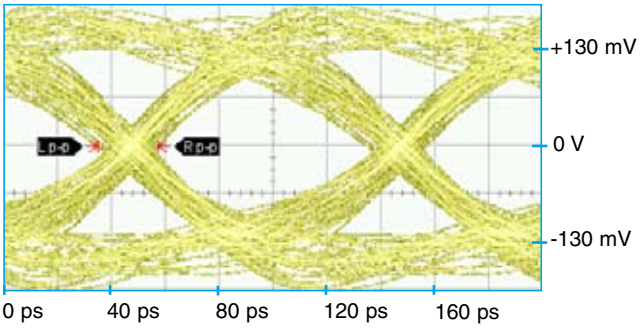

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
124.5 mV	73.90 ps	5.23	22.22 ps


SERIES GA152

Attenuated Path

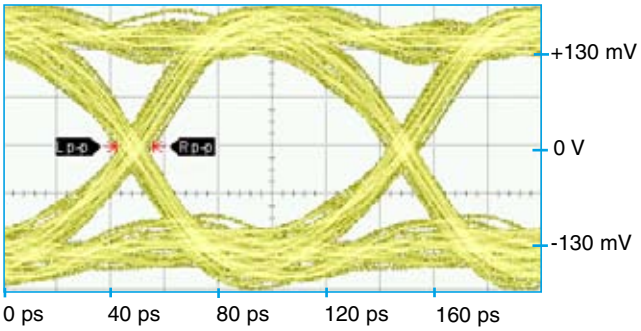

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
67.99 mV	82.70 ps	7.85	13.78 ps

Thru Path

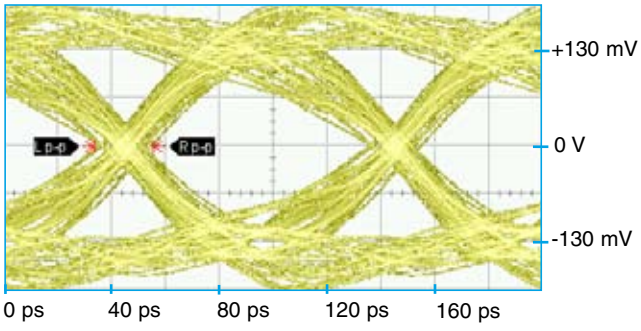

Eye Height	Eye Width	SNR	Jitter$_{P-P}$
122.9 mV	76.21 ps	5.07	21.78 ps

PATTERN GENERATOR SETTINGS

10 Gbps Random Pulse Pattern Generator
2^{31} - 1 PRBS signal
PRBS output of 300mV$_{P-P}$ (nominal)
RF PCB effect (negligible) not removed from measurement
Data shown is typical of both poles

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS

RoHS and REACH CERTIFICATE OF COMPLIANCE

RoHS

It is hereby stated and certified that Teledyne Relays complies with the Restrictions on Hazardous Substances (RoHS) Directives to the extent herein:

Teledyne Relays does not use any of the Restricted Substances specified by the RoHS Directives (listed below) as components in TO-5 and Centigrid® Electromechanical Relay products, nor are these substances employed during any electromechanical relay manufacturing process:

Lead
Mercury
Cadmium
Hexavalent Chromium
Polybrominated Biphenyls (PBB's)
Polybrominated Diphenyl Ethers (PBDE's)

However, upon request from the Customer, relay leads may be coated with solder, which contains 60% tin and 40% lead.

REACH

It is hereby stated and certified that Teledyne Relays complies with the Registration Evaluation Authorization and Restriction of Chemicals (REACH) Directives to the extent stated herein:

Teledyne Relays is a manufacturer of articles. Teledyne Relays has taken the initiative to review the (39) substances that are under consideration for treatment as Substances of Very High Concern (SVHC) candidates. Teledyne Relays confirmed that our relays do not contain any of the listed substances in concentration >0.1% weight per supplied article, substance or preparation weight.


RoHS or Non-RoHS:
Your Choice!

TELEDYNE
RELAYS
A Teledyne Technologies Company


For Additional Information please E-Mail us at: relays@teledyne.com

APPENDIX: TELEDYNE RELAYS PART NUMBERING SYSTEM


RF Attenuator Relays

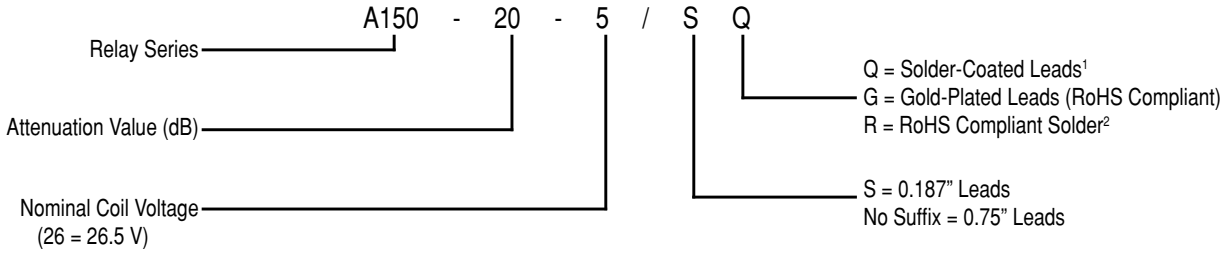


RF Relays (Except Attenuator Relays)

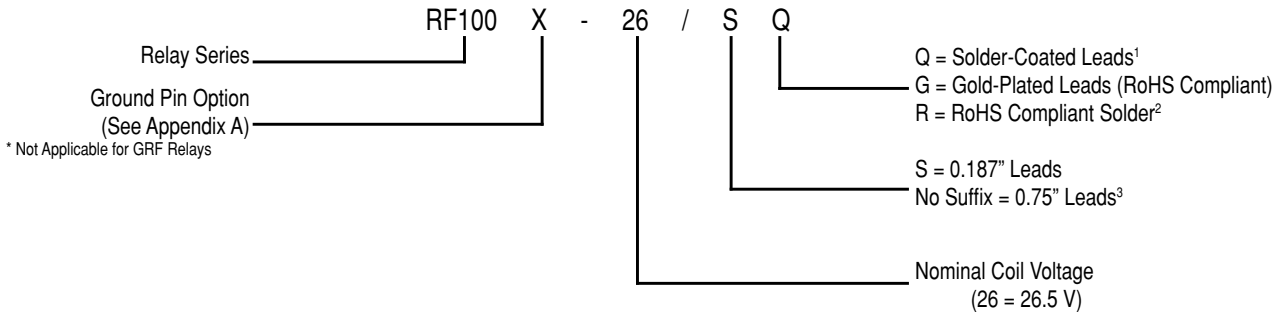

T²R Established Reliability Relays

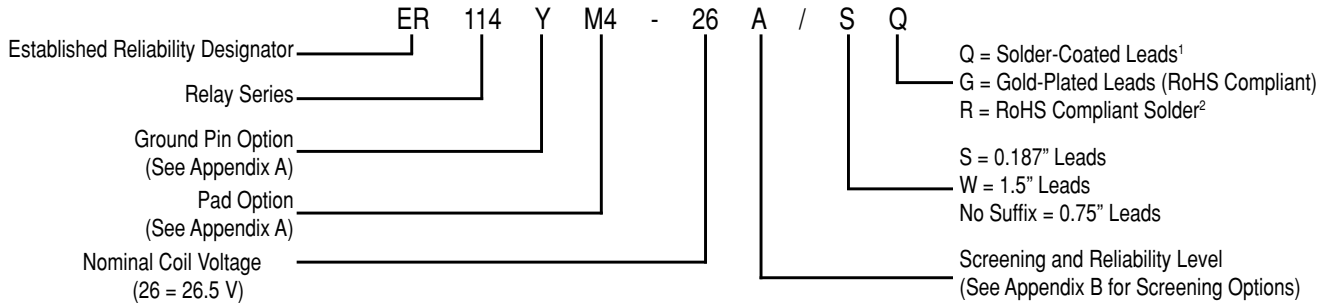

Military Qualified (JAN) Relays

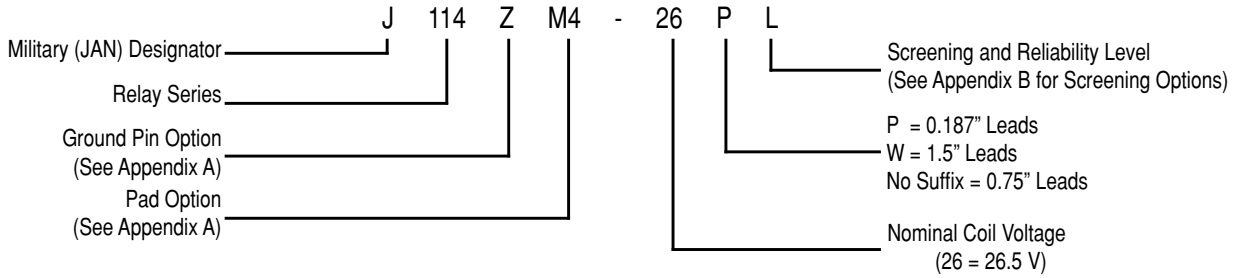

General Note: Parts ordered without suffix may be supplied with Solder-Coated or Gold-Plated leads

[1] Parts ordered with Solder-Coated leads will have (Sn60/Pb40)

[2] Parts ordered with RoHS Solder-Coated leads will have (Sn99.3/Cu0.7)


[3] Not Applicable to GRF relays

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com


© 2010 TELEDYNE RELAYS

APPENDIX: TELEDYNE RELAYS PART NUMBERING SYSTEM


Commercial Surface Mount Relays

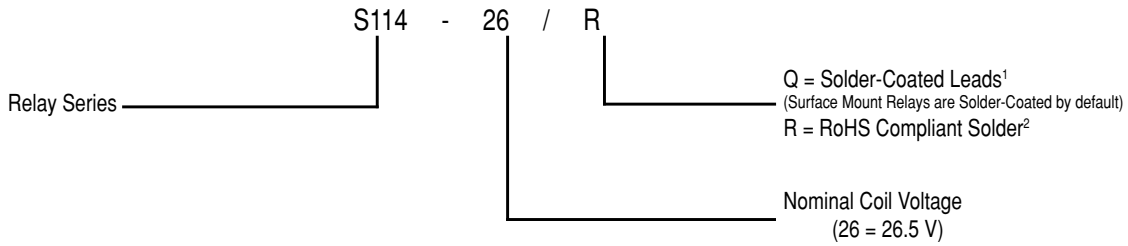

Commercial Relays, (Except Surface Mount Relays)

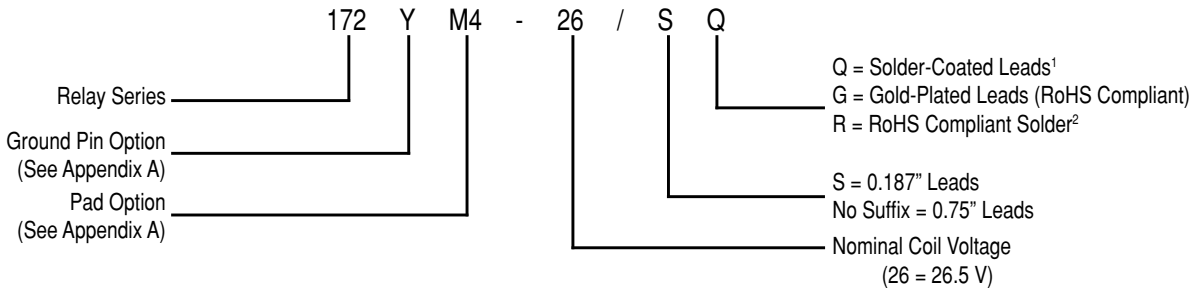









High Performance Relays

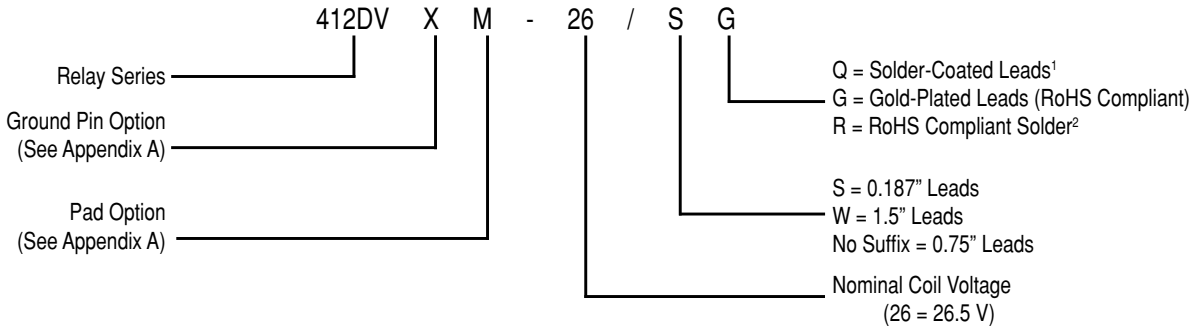

General Note: Parts ordered without suffix may be supplied with Solder-Coated or Gold-Plated leads.
1 Parts ordered with Solder-Coated leads will have (Sn60/Pb40)
2 Parts ordered with RoHS Solder-Coated leads will have (Sn99.3/Cu0.7)

If you don't see what you're looking for in this Selection Guide, contact us!

APPENDIX: Spacer Pads







Pad designation and bottom view dimensions	Height	For use with the following:	Dim. H Max.
 "M4" Pad for TO-5		ER412, ER412D, ER412DD	.295 (7.49)
		712, 712D, 712TN, RF300, RF310, RF320	.300 (7.62)
		ER420, ER422D, ER420DD, 421, ER421D, ER421DD, ER422, ER422D, ER422DD, 722, 722D, RF341	.305 (7.75)
		ER431T, ER432T, ER432, ER432D, ER432DD	.400 (10.16)
		732, 732D, 732TN, RF303, RF313, RF323	.410 (10.41)
		RF312	.350 (8.89)
 "M4" Pad for TO-5		ER411, ER411D, ER411DD, ER411T	.295 (7.49)
		ER431, ER431D, ER431DD	.400 (10.16)
		RF311	.300 (7.62)
		RF331	.410 (10.41)
 "M4" Pad for Centigrid®		172, 172D	.305 (7.75)
		ER114, ER114D, ER114DD, J114, J114D, J114DD	.300 (7.62)
		ER134, ER134D, ER134DD, J134, J134D, J134DD	.400 (10.16)
		RF100	.315 (8.00)
		RF103	.420 (10.67)
 "M9" Pad for Centigrid®		122C, A152	.320 (8.13)
		ER116C, J116C	.300 (7.62)
		ER136C, J136C	.400 (10.16)
		RF180	.325 (8.25)
		A150	.305 (7.75)

Notes:

1. Spacer pad material: Polyester film.
2. To specify an "M4" or "M9" spacer pad, refer to the mounting variants portion of the part numbering example in the applicable datasheet.
3. Dimensions are in inches (mm).
4. Unless otherwise specified, tolerance is ± .010" (.25 mm).
5. Add 10 mΩ to the contact resistance shown in the datasheet.
6. Add 0.01 oz. (0.25 g) to the weight of the relay assembly shown in the datasheet.

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS

APPENDIX: Spreader Pads

Pad designation and bottom view dimensions	Height	For use with the following:	Dim. H Max.
 "M" Pad 5/ 6/		ER411T, J411T, ER412, ER412D ER412DD, J412, J412D, J412DD ER412T, J412T	.388 (9.86)
		712, 712D, 712TN	.393 (9.99)
		ER431T, J431T, ER432, ER432D ER432DD, J432, J432D, J432DD ER432T, J432T	.493 (12.52)
		732, 732D, 732TN	.503 (12.78)
		ER420, J420, ER420D, J420D ER420DD, J420DD, ER421, J421 ER421D, J421D, ER421DD J422D, ER422DD, J422DD, 722	.398 (10.11)
 "M2" Pad 7/ 8/		ER411T ER412, ER412D, ER412DD J412, J412D, J412DD	.441 (11.20)
		712, 712D	.451 (11.46)
		ER421, ER421D, ER421DD 722, 732D	.451 (11.46)
		ER431T ER432, ER432D, ER432DD	.546 (13.87)
		732, 732D	.556 (14.12)
 "M3" Pad 5/ 6/ 9/		ER411, ER411D, ER411DD, ER411TX ER412X, ER412DX, ER412DDX ER412TX	.388 (9.86)
		712X, 712DX, 712TNX	.393 (9.99)
		ER420X, ER420DX, ER420DDX ER421X, ER421DX, ER421DDX ER422X, ER422DX ER422DDX, 722X, 722DDX	.398 (10.11)
		ER431, ER431D, ER431DD ER431TX ER432X, ER432DX, ER432DDX ER432TX	.493 (12.52)
		732X, 732DX, 732TNX	.503 (12.78)

Notes:

1. Spreader pad material: Diallyl Phthalate.
2. To specify an "M", "M2" or "M3" spreader pad, refer to the mounting variants portion of the part number example in the applicable datasheet.
3. Dimensions are in inches (mm).
4. Unless otherwise specified, tolerance is ± .010" (0.25 mm).

5/. Add 25 mΩ to the contact resistance shown in the datasheet.

6/. Add .01 oz. (0.25 g) to the weight of the relay assembly shown in the datasheet.


7/. Add 50 mΩ to the contact resistance shown in the datasheet.

8/. Add 0.025 oz (0.71 g) to the weight of the relay assembly shown in the datasheet.


9/. M3 pad to be used only when the relay has a center pin (e.g. ER411M3-12A, 722XM3-26.)

© 2010 TELEDYNE RELAYS


APPENDIX: Ground Pin Positions

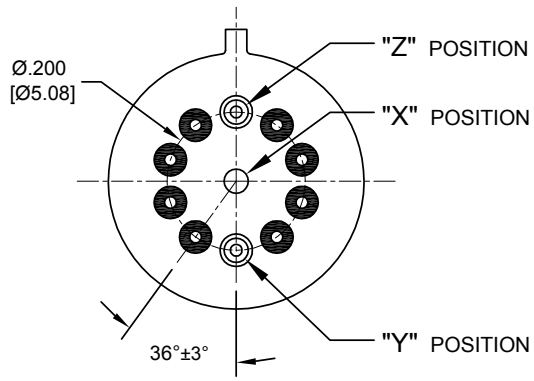


TO-5 Relays:
ER411T, ER412, ER412T, ER420, ER421, ER422, ER431T, ER432, ER432T, 712, 712TN, 400H, 400K, 400V, RF300, RF303, RF341, RF312, RF310, RF313, RF320, RF323

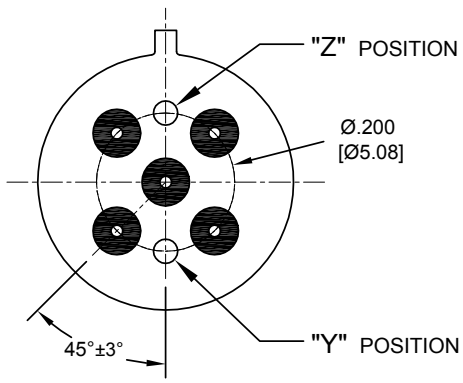

TO-5 Relays:
ER411, ER431, RF311, RF331

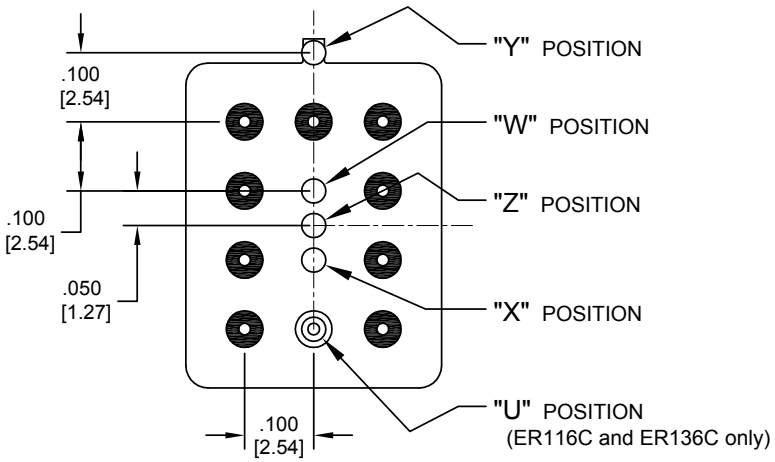

Centigrid® Relays:
RF180, ER116C, 122C, ER136C

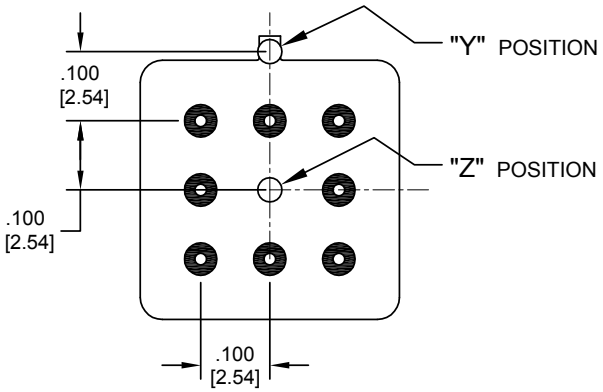

Centigrid® Relays:
RF100, RF103, ER114, ER134, 172

○ Indicates ground pin position

● Indicates glass insulated lead position

◎ Indicates ground pin or lead position depending on relay type

NOTES

1. Terminal views shown
2. Dimensions are in inches (mm)
3. Tolerances: ± .010 (±.25) unless otherwise specified
4. Ground pin positions are within .015 (0.38) dia. of true position
5. Ground pin head dia., 0.035 (0.89) ref: height 0.010 (0.25) ref.
6. Lead dia. 0.017 (0.43) nom.

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS

APPENDIX: Teledyne Relays T²R Program

Teledyne Relays' T²R program was developed to provide the JAN relay user an alternate means of specifying and procuring established reliability relays. The form, fit and function of a T²R relay is the same as that of its JAN counterpart. T²R program requirements differ in certain regimens/tests found in both MIL-PRF-28776 and MIL-PRF-39016 that add cost but no value to the relay.

This program parallels the military specifications in most aspects. The components that make up such a program are intricate and varied. Furthermore, there are additional options of high value for design, manufacturability and operation of high reliability assemblies. The following page presents a table that compares the 100% screening performed on JAN relays and T²R relays prior to shipment.

Other significant highlights of the T²R program include:

- Two unique screening levels
- The ability to define lead finish
- Spacer pad options which may not be available in military specifications
- Ground pin options which may not be available in military specifications
- Reduced lead time
- Reduced cost

The program is fully defined for both general product requirements and detailed product requirements in the following Teledyne Relays specifications:

TR-R-1
TR-STD-1
TR-STD-2
TR-ERL-1
TR-R-1/XXX
TR Supplement

Copies of these documents are available from Teledyne Relays. We suggest that users check with Teledyne Relays from time to time to assure that they have the latest issue.

Can't Find What You Need?

Check out our full line of relays and switches. Order literature online at
http://www.teledynerelays.com/lit-request.asp



APPENDIX: Teledyne Relays T²R Program

INSPECTION	Screening Levels			
	T²R A Level 1.5%/10K Cycles	T²R B Level .75%/10K Cycles	JAN L Level 3%/10K Cycles	JAN M Level 1%/10K Cycles
Subgroup 1				
Screening, Internal Moisture AQL[1]	✔	✔	✔	✔
Vibration (Sinusoidal) AQL[1]			✔	
Vibration (Sinusoidal) 100%		✔		✔
Screening, Burn-In (Hybrids only)			✔	✔
Screening, Run-In (Room Temperature)	✔			
Screening, Run-In (+125°C and –65°C)		✔	✔	✔
Subgroup 2				
Coil Resistance or Coil Current	✔	✔	✔	✔
Insulation Resistance	✔	✔	✔	✔
Dielectric Withstanding Voltage	✔	✔	✔	✔
Static Contact Resistance	✔	✔	✔	✔
Pickup and Dropout or Set and Reset Voltage	✔	✔	✔	✔
Operate and Release or Set and Reset Time	✔	✔	✔	✔
Hold Voltage			✔	✔
Turn-On and Turn-Off Time (Hybrids only)	✔	✔	✔	✔
Contact Bounce Time	✔		✔	
Contact Stabilization Time		✔		✔
Turn-On Current (T Hybrids only)	✔	✔	✔	✔
Turn-On Voltage (C Hybrids only)	✔	✔	✔	✔
Turn-Off Voltage (Hybrids only)	✔	✔	✔	✔
Coil Transient Suppression (D, DD and Hybrids only)	✔	✔	✔	✔
Diode Blocking Integrity (DD only)	✔	✔	✔	✔
Zener Voltage (C Hybrid only)	✔	✔	✔	✔
Neutral Screen (Latching Relays only)	✔	✔	✔	✔
Break Before Make Verification			✔	✔
Contact Simultaneity			✔	✔
Subgroup 3				
Solderability 2 Samples per Daily Solderability Inspection Lot	✔	✔	✔	✔
Leak Test	✔	✔	✔	✔
External Visual and Mechanical Inspection 2/Lot for Dimension and Weight Check	✔	✔	✔	✔

1 AQL = Acceptable Quality Level

(800) 284-7007 • www.teledynerelays.com • +44 (0) 1236 453124 • www.teledyne-europe.com
© 2010 TELEDYNE RELAYS


Teledyne Relays: Because in deep space there is no acceptable failure rate

Teledyne Relays has a long history of supplying High Reliability relays for use in space bound vehicles. From the earliest deep space probes, such as
Voyager I, now nearing 21 billion miles out in space, to the next generation of probes scheduled for the
future , Teledyne Relays continues to be the preeminent supplier of Hi-Reliability relays to the space market.

Teledyne Relays Hi-Reliability Specification:
TR-HIREL-1

- Eliminates the need for customers to develop and maintain specifications.
- Manufacturing and Quality Assurance requirements are fully defined and documented.
- Meets the general requirements of both ESA/SCC and NASA/GSFC documents.
- Offers options for 100% Group A screening
- Offers options for 3 levels of Lot Acceptance Testing (LAT).

Teledyne Screening Document 0-40-837
NASA approved screening regimen based on NASA/GSFC S-311-P.754

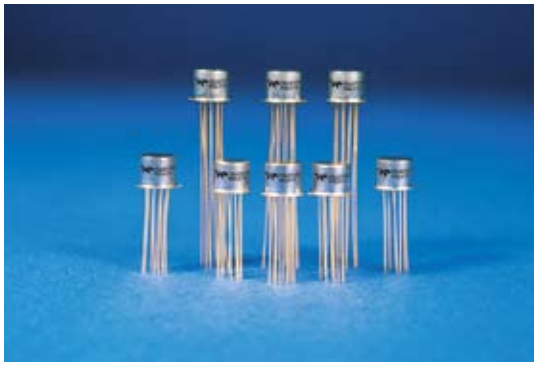

RELAY TYPES

TO-5 Magnetic-Latching Relays
TO-5 Non-Latching Relays
TO-5 Magnetic-Latching, High-Shock Relays
TO-5 Non-Latching, High-Shock Relays
TO-5 Non-Latching, High-Vibration Relays

HI-REL SCREENING CAPABILITIES

100% Open Electrical Inspection
100% Precap Inspection
Fully Automated Small Particle Inspection
(Millipore Clean)
Asynchronous Miss Test
Coil Continuity
Sine Vibration
Random Vibration
High/Low Run In
(Miss Test) –65 °C ± 125 °C
Radiographic Inspection
Mechanical Shock Test
Thermal Shock Test
Acceleration
Radiographic Inspection (X-ray)
Mechanical Shock Test
Thermal Shock Test
Acceleration
Load Banks for a Variety of Life Test Load
Serialized Printed Electrical Data
Continuous Life Testing
Environmental Testing
Vertical Integration

For information or answers to your questions, please visit our website.

© 2010 TELEDYNE RELAYS

APPENDIX: Authorized Distributors

NORTH AMERICA

ALLIED ELECTRONICS
Tel: (800) 433-5700
www.alliedelec.com/search.asp

ASAP ELECTRONICS
Tel: (800) 477-1272
www.asapelectronics.com

AVNET
Tel: (800) 772-8638
www.em.avnet.com

MASTER DISTRIBUTORS
Tel: (888) 473-5297
www.onlinecomponents.com

MOUSER ELECTRONICS
Tel: (800) 346-6873
www.mouser.com

RICHARDSON ELECTRONICS
Tel: (800) 737-6937
www.rell.com

SHERBURN ELECTRONICS
Tel: (800) 366-3066
www.sherburn.com

BELGIUM & LUXEMBOURG

Nijkerk Electronics B.V.
Tel: +32 (0) 3 544 7066
E-mail: alain.huysmans@nijkerk.be
www.nijkerk-ne.com

CHINA & HONG KONG

Fiaco Microelectronics
Beijing Office
Tel: 86-10-6503-2171
E-mail: beijing@fiaco.com

Bright Toward Industrial Co., Ltd.
Beijing Office
Tel: 86-10-8200-4979
E-mail: linden_wang@toward.com.cn

CZECH REPUBLIC

Amtek spol. s.r.o.
Tel: +420 547 125 555
E-mail: amtek@amtek.cz
www.amtek.cz

DENMARK

ARROW Denmark A/S
Tel: +45 (0) 70102211
E-mail: jbh@arrownordic.com
www.arrowne.com

ESTONIA

ARROW Estonia
Tel: +372 6 774250
E-mail: estonia@arrownordic.com
www.arrowne.com

FINLAND

ARROW Finland Oy
Tel: +358 9 3212 831
www.arrowne.com

FRANCE

ARROW France
Tel: +33 1 4978 4960
E-mail: ralves@arrowfrance.com

GERMANY

Adelco Elektronik GmbH
Tel: +49 (0) 4106 61040
E-mail: adelco@t-online.de
www.adelco-elektronik.de

Hot Electronic GmbH
Tel: +49 (0) 89 666 2836
E-mail: info@hot-electronic.de
www.hot-electronic.de

MRC Components oHG
Tel: +49 (0) 8161 98480
E-mail: info@mrccomponents.de
www.mrccomponents.de

Zettler electronics GmbH
Tel: +49 (0) 89 800 97-0
E-mail: office@zettlerelectronics.com
www.zettlerelectronics.com

INDIA

Specsynergy Technologies, Inc.
San Jose, CA (Main Office)
Tel: (408) 954-8474 x105
E-mail: karthik@spectraus.com

Specsynergy Technologies, Inc.
New Delhi Office
Tel: 91 11 25860 752
E-mail: malik@specsynergytech.com

ISRAEL

STG International Ltd.
Tel: +972 (0) 3 733 1400
E-mail: davidb@stggroup.co.il
www.stggroup.co.il

ITALY

SINCRON s.r.l.
Tel: +39 02 95384218
E-mail: ermanno.baschieri@sincron.it
www.sincron.it

JAPAN

Comcraft Corporation Tokyo
Tel: 81-3-3395-5553
E-mail: trcsales@comcraft.co.jp
www.comcraft.co.jp

Comcraft Corporation Osaka
Tel: 81-6-6396-7722
E-mail: trcsales@comcraft.co.jp
www.comcraft.co.jp

KOREA

Electro-Comm USA
Tel: (818) 848-7790
E-mail: briansong@anyeparts.com
www.anyeparts.com

Electro-Comm SEOUL
Tel: 82-31-713-4216
E-mail: tony_jang@anyeparts.com
www.anyeparts.com

LATVIA

ARROW Latvia
Tel: +371 7311490
E-mail: latvia@arrownordic.com
www.arrowne.com

LITHUANIA

ARROW Lithuania
Tel: +370-37-759015
E-mail: lithuania@arrownordic.com
www.arrowne.com

MALAYSIA

Device Electronics PTE, Ltd.
Tel: (603) 7880 8626/8636
E-mail: ngthomas@devicelect.com

NETHERLANDS

Nijkerk Electronics B.V.
Tel: +32 (0) 3 544 7066
E-mail: alain.huysmans@nijkerk.be
www.nijkerk-ne.com

NORWAY

ARROW Norway A/S
Tel: +47 (0) 21306532
E-mail: stondevoldshagen@arrownordic.com
www.arrowne.com

RUSSIA

Petersburg Electronic Company JSC
Tel: +7 812 4488 777
E-mail: dkizha@pec.spb.ru
www.pec.spb.ru

SINGAPORE

Device Electronics PTE, Ltd.
Tel: 65-288 6455
E-mail: ngthomas@devicelect.com

SOUTH AFRICA

RF Design
Tel:
National Smart Call: 0861 753 357
Cape Town: +27 (0) 21 555 8400
Gauteng: +27 (0) 11 695 2200
Durban: +27 (0) 31 266 4534
www.rfdesign.co.za

SWEDEN

ARROW Sweden
Tel: +46 8 56265500
E-mail: aekstrom-winroth@arrownordic.com
www.arrowne.com

MicroComp Nordic AB
Tel: +46 8 607 3910
E-mail: info@microcomp-nordic.se
www.mcnab.se

OEM Electronics
Tel: +46 75 242 4562
E-mail: ulf.nygren@oemelectronics.se
www.oemelectronics.se

SWITZERLAND

ENA AG
Tel: +41 56 6342834
E-mail: rolf.hochstrasser@ena.ch
www.ena.ch

TAIWAN

Bright Toward Industrial Co., Ltd.
Tel: +886-2-822-76000
E-mail: philip@relays.com.tw
www.relays.com.tw

UNITED KINGDOM

Advanced Power Components plc
Tel: +44 (0) 1480 226603
E-mail: angiep@apc-plc.co.uk
www. apc-plc.co.uk


Arrow Electronics UK Ltd.
Tel: +44 (0) 1279 626 777
www.arrowne.com

Willow Technologies Ltd.
Tel: +44 (0) 1342 835 234
E-mail: sales@willow.co.uk
www.willow.co.uk

2001 Electronic Components Ltd.
Tel: +44 (0) 1438 742 001
E-mail: sales@2001elec.co.uk
www.2001elec.co.uk

© 2010 TELEDYNE RELAYS

APPENDIX: Authorized North American Representatives

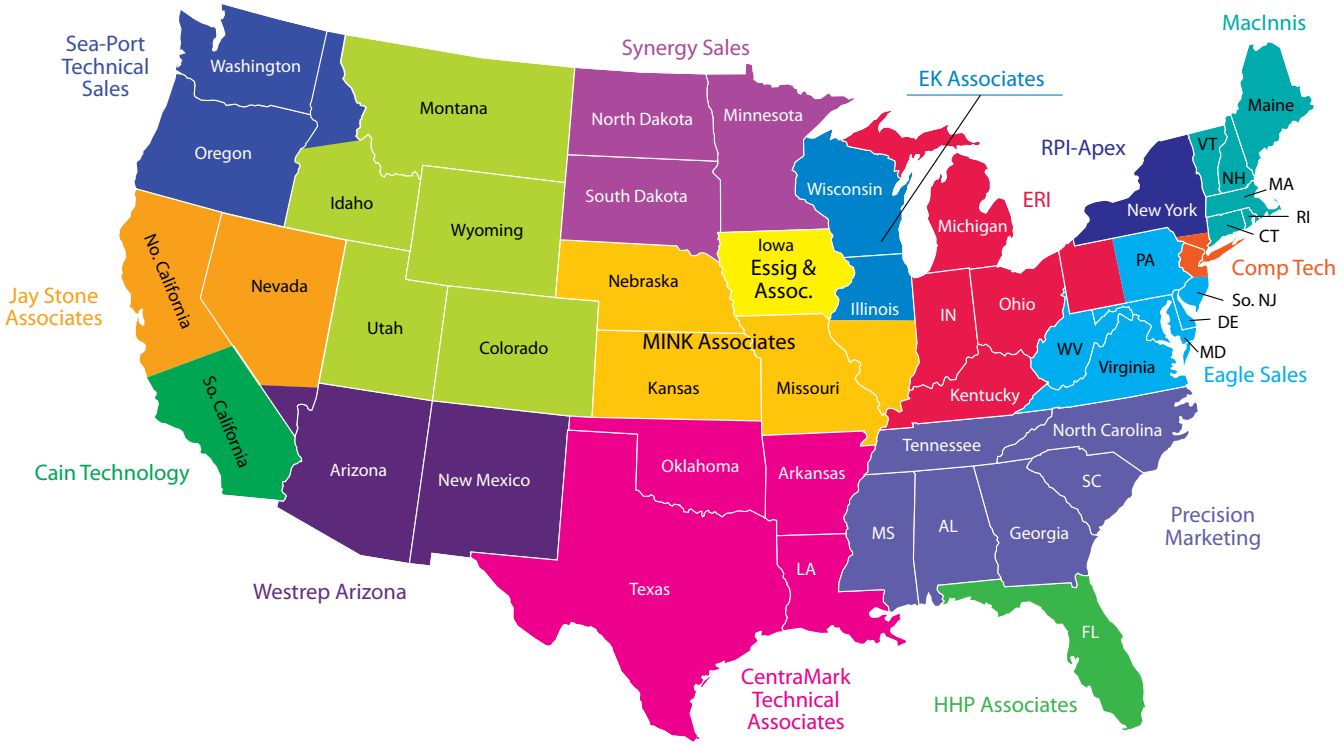

REPRESENTATIVES

Cain Technology
Southern California
2629 Townsgate Road, Suite 200
Westlake Village, CA 91361
Tel: 805-496-5702
Fax: 805-496-6702
www.caintech.com

Cee-Jay Micro Ltd.
Eastern Canada
155 Terence Matthews Crescent
Unit 2
Kanata, Ontario
Canada K2M 2A8
Tel: 613-599-5626
www.cjmicro.com

CentraMark Technical Sales Associates
TX, OK and LA
3333 Naaman School Road
Garland, TX 75040
Tel: 972-414-8188
Fax: 972-414-6788
www.cmatex.com

Comp-Tech Sales
Northern New Jersey, Metro New York, Long Island
232 Boulevard, Suite 11
Hasbrouck Heights, NJ 07604
Tel: (201) 288-7400
Fax: (201) 288-7583
www.comp-techsales.com

Eagle Sales Corporation
MD, VA, WA DC, Eastern PA, Southern NJ
3545 Ellicott Mills Drive, Suite 202
Ellicott City, MD 21043
Tel: (410) 203-2317
Fax: (410) 203-2318
www.eaglesales.net

EK & Associates, Inc.
IL, WI
887 E. Wilmette Road, Suite J
Paltine, IL 60074
Tel: 847-776-1758
Fax: 847-776-8221
www.ekrep.com

Electronic Representatives, Inc.
IN, OH, MI, KY, West PA
6801 Lake Plaza Drive, Suite D402
Indianapolis, IN 46220
Tel: (317) 915-1414
Fax: (317) 915-1216
www.electronicreps.com

Essig & Associates, Inc.
Iowa
809 N. Compton Drive
Hiawatha, IA 52233
Tel: (319) 363-8703
Fax: (319) 363-7224
www.essigassoc.com

HHP Associates, Inc.
Florida
1355 S. International Pkwy, Suite 2471
Lake Mary, FL 32746
Tel: 407-829-8792
Fax: 407-829-8798
www.hhpai.com

Jay Stone & Associates
Northern California
2109 O'Toole Avenue, Suite M
San Jose, CA 95131
Tel: 408-428-2500
Fax: 407-428-9000
www.jsarep.com

The MacInnis Company
ME, NH, RI, CT, MA, VT
375 Vanderbilt Avenue
Norwood, MA 02062
Tel: (781) 762-8090
Fax: (781) 762-5059
www.macinnis-company.com

MINK Associates
NE, KA, MO
10100 Santa Fe, Suite 311
Overland Park, KS 66212
Tel: (913) 341-8309
Fax: (913) 341-2605
www.minkassoc.com

Precision Marketing Incorporated
MS, AL, TN, GA,NC and SC
5497 Wiles Road, Suite 204
Coconut Creek, FL 33073
Tel: (954) 752-1700
Fax: (954) 973-6335
www.precision-marketing.com

RPI-Apex Associates, Inc.
Upstate New York (excluding Long Island)
54 Andover Street
Andover, MA 01810
Tel: 978-475-7055
Fax: 978-475-4749
www.rpi-apex.com

Sea-Port Tech Sales
WA, OR, ID, Western Canada
3630 130th Ave. NE
Bellevue, WA 98005
Tel: (425) 702-8300
Fax: (425) 702-8388
www.seaporttech.com

Synergy Sales Representatives, Inc.
MN, ND, SD
5401 Gamble Drive, Suite #105
St. Louis Park, MN 55416
Tel: (952) 544-1686
Fax: (952) 545-2935
www.synergyreps.com

Westrep Arizona
AZ, NM, Clark County, NV & El Paso, TX
6105 S. Ash Avenue, Suite A8
Tempe, AZ 85283
Tel: (480) 820-9932
Fax: (480) 820-9962
www.westrepaz.com

HEADQUARTERS
12525 Daphne Ave.
Hawthorne, CA 90250
Phone: (323) 777-0077 or (800) 284-7007
Fax: (323) 241-1287
E-mail: relays@teledyne.com

www.teledynerelays.com
(800) 284-7007

EUROPE
9-13 Napier Road
Wardpark North
Cumbernauld G68 OEF
Scotland UK
Phone: +44 (0) 1236 453 124
Fax: +44 (0) 1236 780 651
E-mail: sales_europe@teledyne.com

www.teledyne-europe.com
+44 (0) 1236 453 124

TELEDYNE
RELAYS
A Teledyne Technologies Company

PRINTED IN U.S.A.

TR1110