THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/05/04	MCCORMICK
B	ECN 4278: ADDED TEMPERATURE RANGE AND PACKAGING	10/1/09	D.FRISIELLO

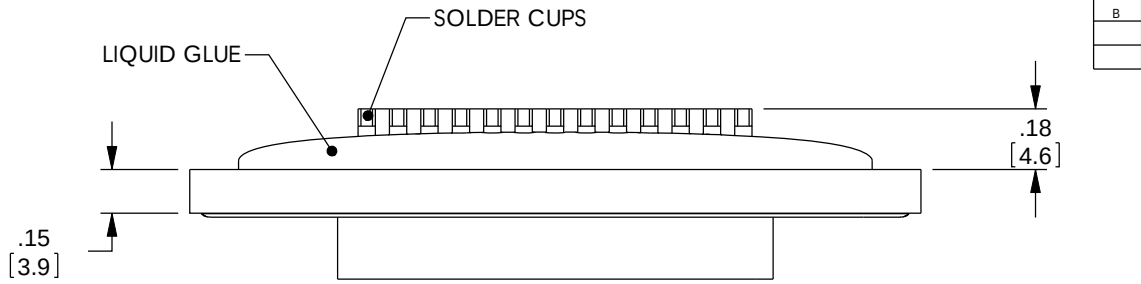



4-40 HEX JACK SCREW
FOR PANEL THICKNESS
UNDER 0.05"

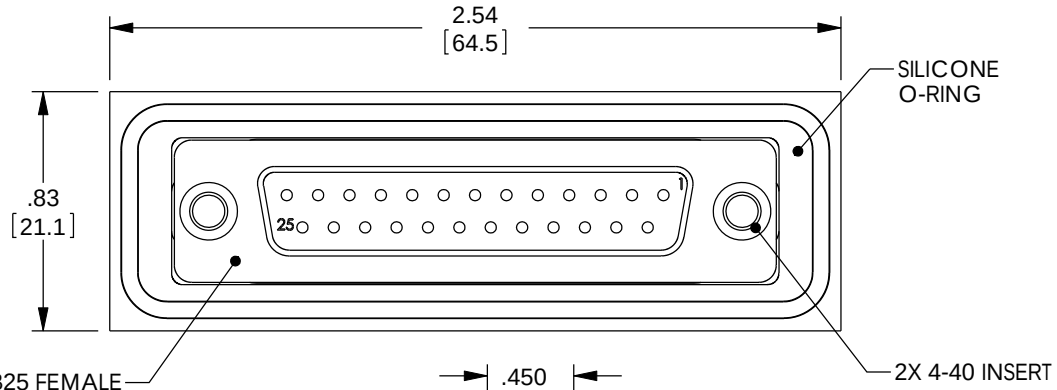



4-40 HEX JACK SCREW
FOR PANEL THICKNESS
BETWEEN 0.05" AND 0.078"

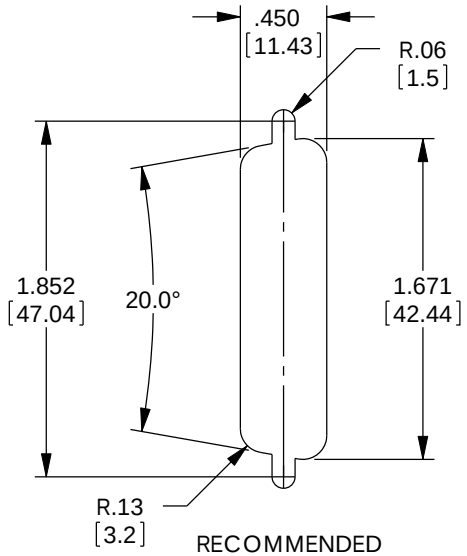

RECOMMENDED
PANEL OPENING

RoHS Compliant ✔

NOTES:

1. IP (INGRESS PROTECTION) RATING: 67.
2. OPERATING TEMPERATURE RANGE: -40˚C TO +105˚C.
3. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
DIMENSIONAL TOLERANCES:
.X = ±.1
.XX = ±.03
.XXX = ±.005
ANGULAR TOLERANCES:
ALL = ± 1°
PROJECTION

APPROVALS	DATE
DRAWN BY C.MCCORMICK	02/05/2004
CHECKED BY D.PARHAM	02/05/2004
APPROVED BY R.CARRICK	02/05/2004

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
DATA CABLING

PRODUCT DESCRIPTION
DB25 FEMALE WATERPROOF SOLDER

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	WPSD25S	B

SCALE: NONE | CAD FILE: WPSD25S.SLDDRW | SHEET 1 OF 1