


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	ECN 11801: REVISED ALL OVERALL DIMENSIONS	04/19/2022	GUTTADAURO

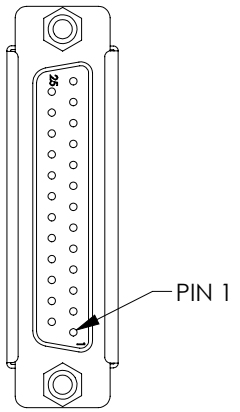

"J1"
FEMALE 25 CONTACT
D-SUB CONNECTOR

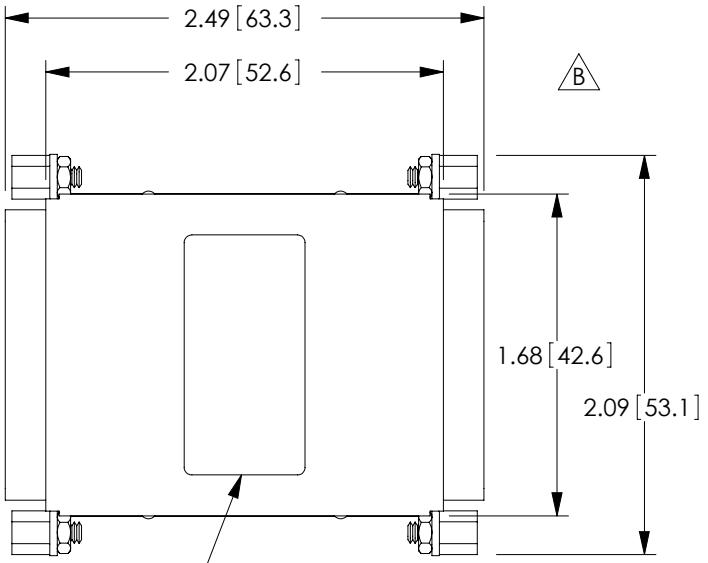

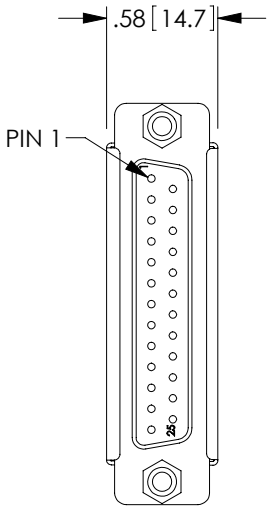

"J2"
FEMALE 25 CONTACT
D-SUB CONNECTOR

NOTES:

MATERIAL:
HOUSING: STEEL (24 GA)
CONNECTOR SHELL: STEEL
INSULATOR: THERMOPLASTIC, UL94V-0 RATED
CONTACTS: PHOSPHOR BRONZE
HARDWARE: STEEL OR BRASS

FINISH:
HOUSING: BRIGHT NICKEL PLATED
CONNECTOR SHELL: TIN PLATED
CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL PLATE
HARDWARE: NICKEL PLATED

MISCELLANEOUS:
B ALL DIMENSIONS ARE FOR REFERENCE ONLY.
STEEL HOUSING PROVIDES COMPLETE 360° SHIELDING
OPERATING TEMPERATURE: -20°C TO +60°C
KIT TO BE INDIVIDUALLY PACKAGED IN A POLYBAG

JUMPER WIRES NOT INCLUDED. ORDER SEPARATELY
L-COM TD-JS, TD-JP, OR TD-JT TERMINATED JUMPER
WIRES FOR EASY PUSH-ON PROGRAMMING.

KIT INCLUDES

1. 2 PIECE METAL HOUSING.
2. 2X FEMALE DB25 WITH SOLDER CUP TERMINALS
3. 4X #4-40 HEX STAND-OFF
4. 4X #4-40 HEX NUT

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] | FRACTIONS ± 1/32
.XX = ± .02 [.5] | ANGLES ± 1°
.XXX = ± .005 [.13]
THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY DFRISIELLO	12/13/2007
CHECKED BY D.PARHAM	12/13/2007
APPROVED BY J.KEZULAS	12/13/2007

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR
REF

L-COM an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY
D-SUBMINIATURE

PRODUCT DESCRIPTION
ADAPTER KIT, METAL, DB25 F/F

SIZE	CAGE CODE	ITEM NO.	REV.
A	43321	DIYKS-F	B

SCALE: NONE | CAD FILE: DIYKS-F.SLDDRW | SHEET 1 OF 1

T-Rev.D