Double nipple, Series PE5

R412010015

- Qn = 3200 l/min

AVENTICS Series CP1 Couplings

The AVENTICS Series CP1 of safe couplings using single snap-on coupling are robust, safe and fit two different plug-in profiles, the EURO- profile and the ARO profile.



Technical data

Industry	Industrial
Port D	G 1/8
Port G	G 1/4
Compressed air connection type	External thread
Delivery unit	2 piece
Weight per piece	0.04 kg
	R412010015

Dimensions

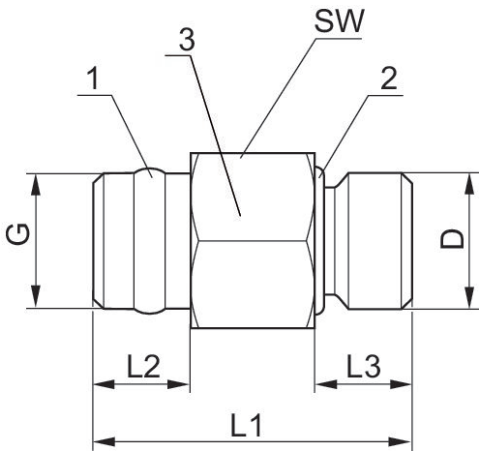

Double nipple, Series PE5

R412010015

1) sealing ring Polytetrafluorethylen

2) O-ring - acrylonitrile butadiene rubber
3) Housing - brass, nickel-plated

Part No.	Port G	Port D	L1	L2	L3	SW
R412010015	G 1/4	G 1/8	30	10	8.5	17
R412010016	G 1/4	G 1/4	30	10	8.5	17