Pomona ELECTRONICS

Technical Data Sheet

Model 5325A
DMM Test Probe to Multi-Stacking Banana Plug Kit

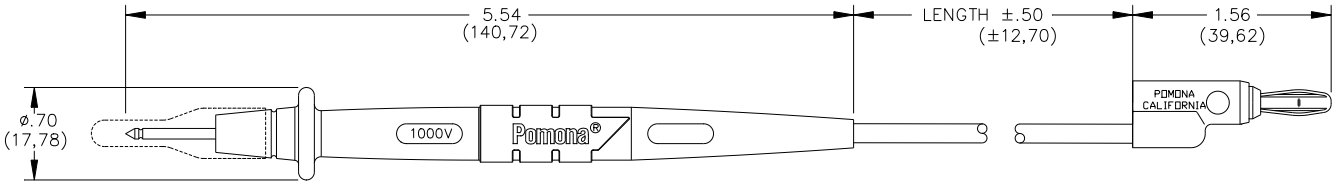

5309A

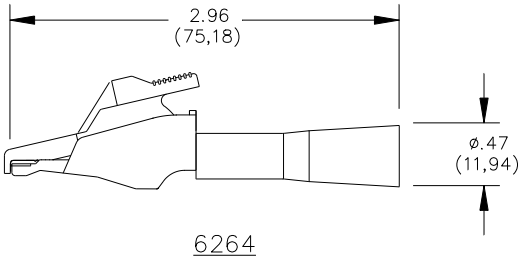

6264

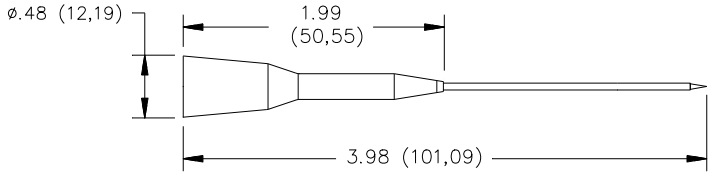

6262

FEATURES

- Fits Fluke, H-P, Tektronix Wavetek and Amprobe meters configured with non-sheathed standard and 4 mm banana jacks.
- Test probe & banana plug bodies are molded directly to a flexible 48" (122 cm) high strand count/high temperature silicone leads for added pull strength, overall probe length 4.85" (12,3 cm).
- Wear indication with double insulated (dual extruded) silicone leads shows white inner layer for increased safety.
- Nickel plated brass tip offers high conductivity for precision measurements.
- Medium alligators are insulated for added safety and can quickly snap onto the .080” (2,03 mm) O.D. probe tip.



- Medium alligators have an overall length of 2.25” (5.7 cm) and grip up to 0.30” (7.62 mm) O.D. terminals.
- Slide-on extended tips have an overall length of 4” (10.16 cm) & attaches to the probe tip to allow access to hard to reach test points. The Extended Tip is insulated to the point to prevent accidental shorting.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (,51 mm), .xxx = ± .005” (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2012

Model 5325A
DMM Test Probe To Multi-Stacking Banana Plug Kit

MATERIALS

Model **5309A**: Test Probe Set:

Probe body: Polypropylene, Fire Retardant – Santoprene® overmold., Tip: Brass
Wire: 18 AWG, 192 x 41 bare copper, Silicone Insulation, O.D. 0.144" (3,66mm). Length: 48" (122cm)
Banana Plug: Insulation: Polypropylene – Plug Body: Brass Nickel Plated, Spring: Beryllium Copper, Nickel Plated
RATINGS:
Operating Voltage: For CE compliance and personal safety, do not hold in hand when voltages exceed 30 Vrms/42.4 Vpk/60 Vdc or current exceeds 8A maximum. Maximum voltage for hands free use: 1000 V. Do not use on circuits where transient stresses can exceed the rated voltage.
Current: 10 Amperes

Model **6262**: Slide-on Extended Tip:

Insulation – Polypropylene UL94 V-2, Color: one black and one red
Probe Tip: Stainless Steel with Kynar Insulation Sleeve to Tip End
RATINGS: CAT II 300 V, Current: 3 Amperes

Model **6264**: Alligator Adapter:

Insulation: Polypropylene, Color: One Black, One Red
Body: Steel, Nickel Plated, Spring: Music Wire
RATINGS: CAT I 300 V, Current: 5 Amperes

Ordering Information: Model 5325A

Kit shipped in a plastic blister package.
Replacement P/N's:

- Model **5309A**: Test Probes, set of one black and one red
- Model **6262**: Slide-on Extended Tip, set of one black and one red
- Model **6264**: Alligator Adapter, set of one black and one red.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2012 D1094373 Rev. 100