
IG5910

Inductive sensor

IGA3008BFPKG/SS-000-K/400mA

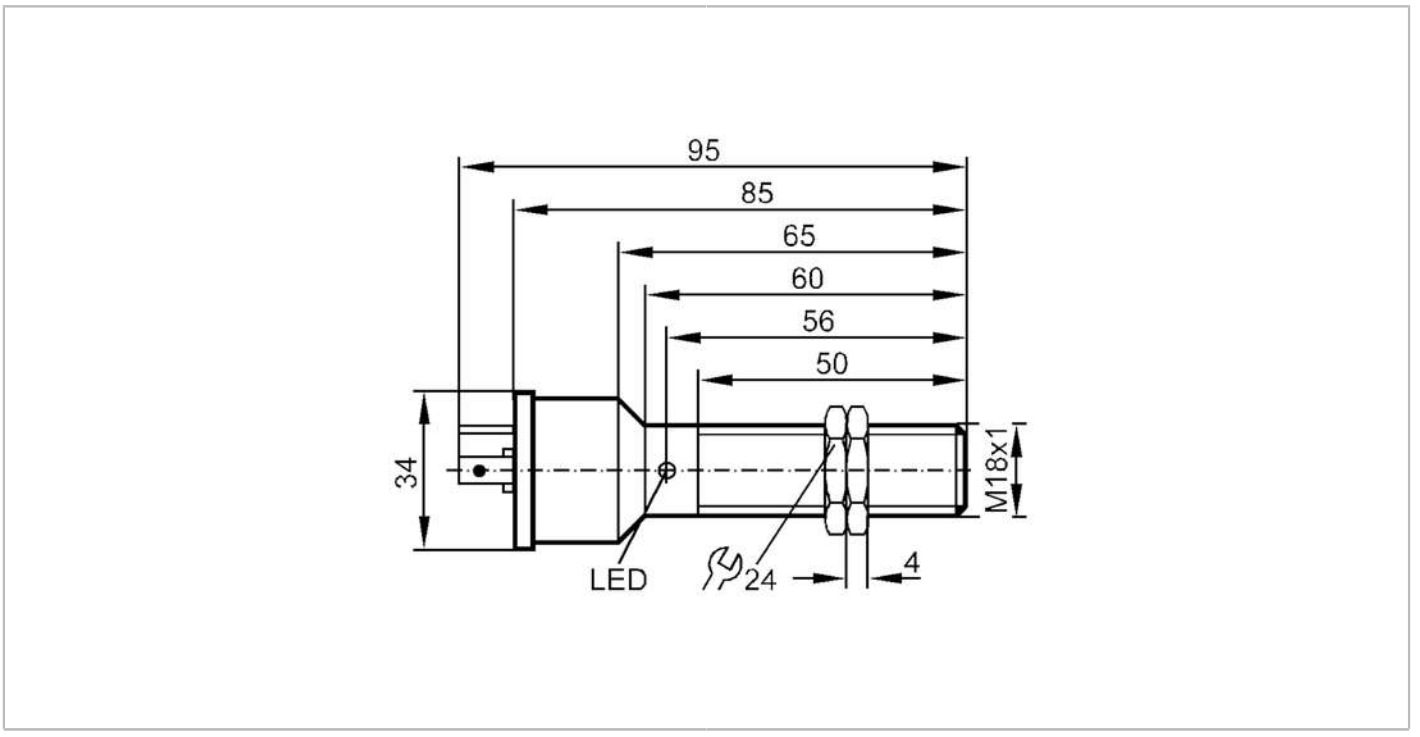

Product characteristics		
Electrical design		PNP
Output function		normally open / normally closed; (selectable)
Sensing range	[mm]	8
Housing		threaded type
Dimensions	[mm]	M18 x 1
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open / normally closed; (selectable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	400
Switching frequency DC	[Hz]	250
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Sensing range	[mm]	8

IG5910

Inductive sensor

IGA3008BFPKG/SS-000-K/400mA

Real sensing range Sr	[mm]	8 ± 10 %	
Operating distance	[mm]	0...6.5	
Accuracy / deviations			
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3	
Hysteresis	[% of Sr]	3...10	
Switch point drift	[% of Sr]	-18...18	
Operating conditions			
Ambient temperature	[°C]	-32...70	
Protection		IP 67	
Tests / approvals			
EMC		EN 60947-5-2	
		EN 55011	class B
MTTF	[years]	1283	
Mechanical data			
Weight	[g]	88.9	
Housing		threaded type	
Mounting		flush mountable	
Dimensions	[mm]	M18 x 1	
Thread designation		M18 x 1	
Materials		brass white bronze coated; PC	
Displays / operating elements			
Display		switching status	1 x LED, yellow
Accessories			
Items supplied		lock nuts: 2	
Remarks			
Remarks		normally open/closed programmable by using a jumper	
Pack quantity		1 pcs.	

Electrical connection - plug

Connector: 1 x valve type A DIN (DIN EN 175301-803)



IG5910

Inductive sensor

IGA3008BFPKG/SS-000-K/400mA

Connection

