SUREFIT™ VISOR CARRIER WITH POLYCARBONATE VISOR

Visor Carrier For EVO® Range Helmets (Micro and Std Peak) Fits Inter and Sonis® Helmet Mounted Ear Defender

PRODUCT CODE: ANN064-521-300

Offers Protection Against Medium Energy High-Speed Particles At 120 m/s (268mph), Liquid Droplets, Molten Metal and Hot Solids

TECHNICAL SPECIFICATION

HEAD PROTECTION

ACCESSORIES

INSTRUCTIONS FOR USE

- In use ensure that the faceshield fits comfortably and securely on the head
- Ensure that a suitable visor has been fitted with the protective film removed from it
- Ensure the visor is in place before entering the hazard area

VISOR PERFORMANCE


- Offers protection against medium energy high-speed particles at 120 m/s (268mph), liquid droplets, molten metal and hot solids
- The optical qualities of the visor comply with the requirements of optical class 1 (highest)

DIMENSIONS OF VISOR CARRIER & VISOR

- Length: 300mm
- Width: 245mm
- Height: 168mm
- Thickness: 1mm
- Weight: 202g (Approx.)

DIMENSIONS OF OUTER PACKAGING

- Quantity: 10
- Weight: TBDg (Approx.)

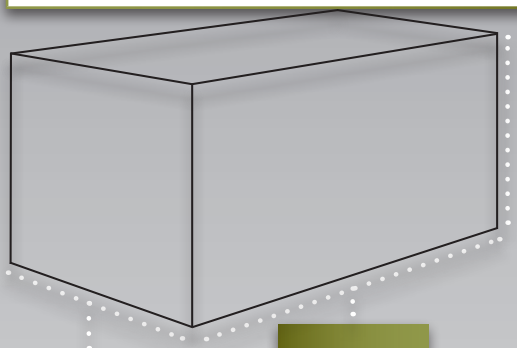

CLEANING & MAINTENANCE

- The unit may be cleaned with soap and warm water and dried with a soft cloth
- Do not clean with chemical or abrasive cleaners
- Store out of direct sunlight away from chemicals and extremes of temperature



AVAILABLE FOR

evo2 Mk2 evolution · evo3 Mk3 evolution · evo lite evolution lite · evo5 Mk5 evolution · evo8 Mk8 evolution

LIMITATIONS OF USE

- Protection will only be offered if the visor carrier and a visor are fitted correctly to a suitable Industrial Safety Helmet with the helmet attachment kit
- Visors and carriers should be replaced if they become scratched, damaged, or are subjected to liquid splash
- Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer
- The Industrial Safety Helmet harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the visor and Helmet and seek medical advice
- Not suitable for use with all chemicals - if you are unsure contact your supplier or JSP for help and advice

CONFORMITY

- Meets the requirements of EN166
- EU Type Examination Certificate Number 682750, issued by BSi Product Certification
- Markings: EN166 1.B.3.9

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jspsafety.co.uk.