MURR ELEKTRONIK
*stay connected*

**M12 male straight / M12 female straight PUR-OB 4x0,34 black UL, CSA 1m**

Male straight to female straight
M12 - M12, 4-pole
Art.-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

## Image



Vicarious picture

## Approvals


| | |
|---|---|
| **Form** | |
| | 40021 |
| **Technical Data** | |
| Operating voltage | max. 250 V AC/DC |
| Operating current per contact | max. 4 A |
| Locking of ports | Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -25...+85 °C, depending on cable quality |
| **Cable** | |
| No./diameter of wires | 4 × 0.34 mm² |
| Wire isolation | PP (br, wh, bl, bk) |
| C-track properties | 5 million |
| Jacket | PUR (UL/CSA) |
| Outer diameter | approx. 4.7 mm |
| Bend radius (moving) | 10 x outer diameter |
| Temperature range (fixed) | -40...+80 °C |
| Temperature range (mobile) | -25...+80 °C |
| **Commercial data** | |
| Net weight | 60 |
| Weight unit | Gram |
| Basic unit | pc. |
| Customs tariff number | 85444290 |
| Unit (piece) | 1 |
| Minimum order quantity (piece) | 1 |

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 01/14


| Comments | |
|---|---|
| | Plastic housings with good resistance against chemicals and oils.<br>The resistance to aggressive media should be individually tested for your application. Further details on request.<br>Further cable lengths on request. |

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 01/14

## Contact layout

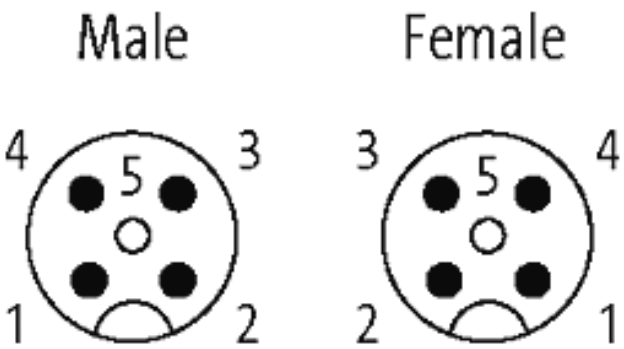


## Circuit diagram

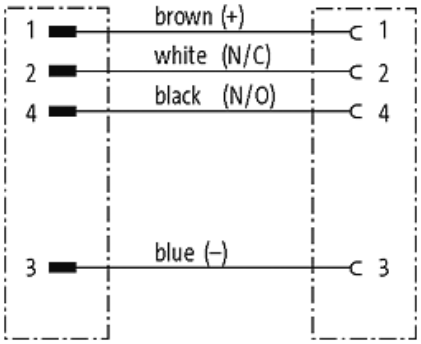


All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 01/14