
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	03/28/02	MCCORMICK
B	ECN 3112: UPDATE DWG FORMAT	12/14/07	D.GRIFFIN

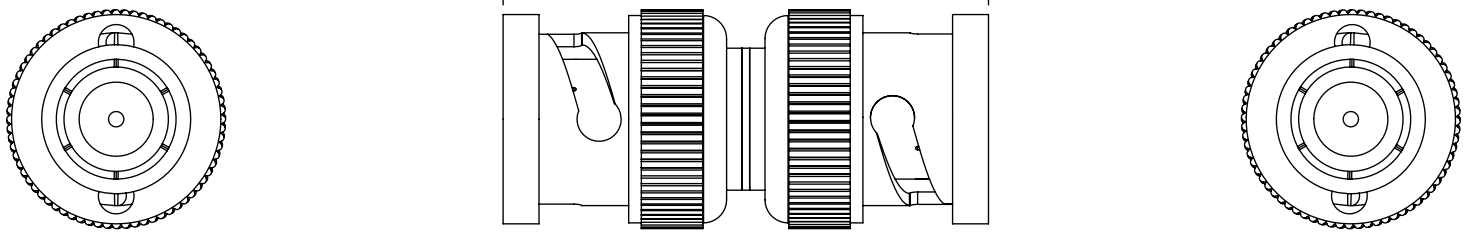

2X BNC PLUG

NOTES:
BODY: BRASS NICKEL PLATE
CENTER PIN: BRASS GOLD PLATE
SPRING: STEEL NICKEL
WASHER: STEEL NICKEL
C TYPE WASHER: STEEL NICKEL
GASKET: PVC
INSULATOR: DERLIN
BNC SHELL: BRASS NICKEL

IMPEDANCE: 50 OHMS
FREQUENCY: 0-4 GHz
VOLTAGE: 500 VOLTS PEAK
VSWR: 1.3 MAX

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
TOLERANCES TO BE:
.X ±.1 [2.5] ANGLES ±2°
.XX ±.01 [.25]
.XXX ±.005 [.13]
OVERALL CABLE LENGTH TOL:
≤ 60 [1524] +3 [76.2] / - 0
> 60 [1524] +5% / -0%
PROJ

APPROVALS	DATE
DRAWN BY MCCORMICK	03/28/02
CHECKED BY D.PARHAM	03/28/02
APPROVED BY R.CARRICK	03/28/02

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

L-com CONNECTIVITY PRODUCTS
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: COAXIAL

PRODUCT DESCRIPTION: ADAPTOR BNC M/BNC M

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	BA100	B

SCALE: NONE | CAD FILE: BA100.SLDDRW | SHEET 1 OF 1