

Q14



Rectangular Sensors, Plastic

Plastic Housing with Potted-In Cable or Straight Connector ***Uprox***®

3-Wire DC  ***picofast***®

10-30 VDC, Short-Circuit and Overload Protected

Normally Open, NPN (Sinking) or PNP (Sourcing)

Specifications

Part Number	Embeddable	Rated Operating Distance (mm)	Housing Height (mm)	NPN (Sinking)	PNP (Sourcing)	Drawing #	Wiring Diagram	# of LEDs	Weld Field Immune	Switching Frequency (Hz)	ID Number	Connection
Bi10U-Q14-AN6X2	•	10	14	•		1	A	2	•	250	16087 10	2 Meter cable, PVC Jacket
Bi10U-Q14-AP6X2	•	10	14		•	1	B	2	•	250	16087 00	
Bi10U-Q14-AN6X2-V1131	•	10	14	•		2	C	2	•	250	16085 10	***picofast*** **Mating Cordsets** PKG 3Z-2 (2 Meter) For other styles see Section F or consult "Cordsets" catalog.
Bi10U-Q14-AP6X2-V1131	•	10	14		•	2	D	2	•	250	16085 00	

Cable/Conductor

Cable:	PVC Jacket; 2 Meter standard length
Copper Conductor: (PVC insulated)	22 AWG

Material

Housing:	PBT-GF30-VO Plastic
Connector:	Chrome Plated Brass

Accessories


Accessories and mounting devices can be found in Section G.

Specifications


Ripple	≤10%
Differential Travel (Hysteresis)	3-15% (5% typical)
Voltage Drop Across Conducting Sensor	≤1.8 V at 200 mA
Trigger Current for Overload Protection	≥220 mA
Continuous Load Current	≤200 mA
Off-State (Leakage) Current	<0.10 mA
No-Load Current	≤15 mA
Time Delay Before Availability	≤8 ms
Power-On Effect	Per IEC 947-5-2
Reverse Polarity Protection	Incorporated
Wire-Break Protection	Incorporated
Transient Protection	2 kV, 1 ms, 1 kΩ
Operating Temperature (10% temp. drift)	-25°C to +70°C (-13°F to +158°F)
Operating Temperature (15% temp. drift)	-30°C to +85°C (-22°F to +185°F)
Enclosure	Meets NEMA 1,3,4,6,13 and IEC IP 67
Shock	30 g, 11 ms
Vibration	55 Hz, 1 mm Amplitude in all 3 Planes
Repeatability	≤2% of Rated Operating Distance
LED On (Green)	Power On
LED On (Yellow)	Output Energized
LED Flashing (Green)	Short-Circuit Warning

Wiring Diagram


A NPN (Sinking)




B PNP (Sourcing)



C NPN (Sinking)




D PNP (Sourcing)



Dimensions

1

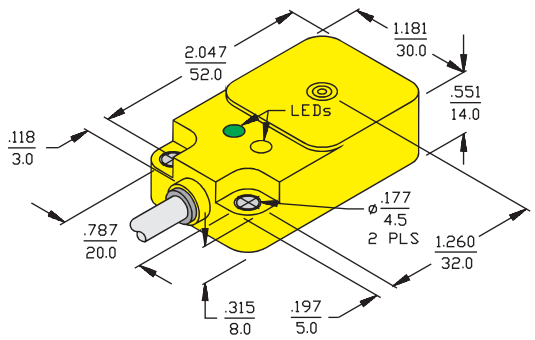

2

