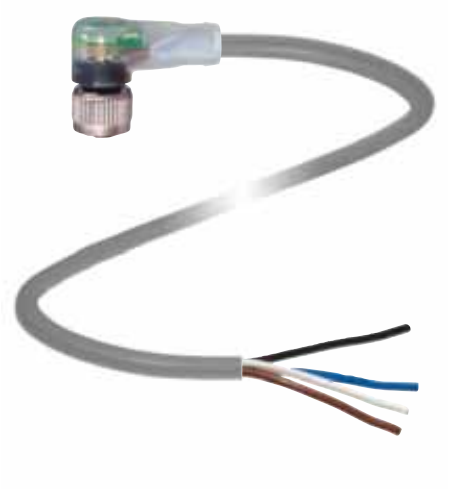


Model Number


V1-W-A2-5M-PUR

Cable socket, M12, LED, 4-pin, PUR cable

Features

- Built-in LED, as operating and function indicator
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Degree of protection IP67 / IP68 / IP69K
- Halogen-free


Dimensions

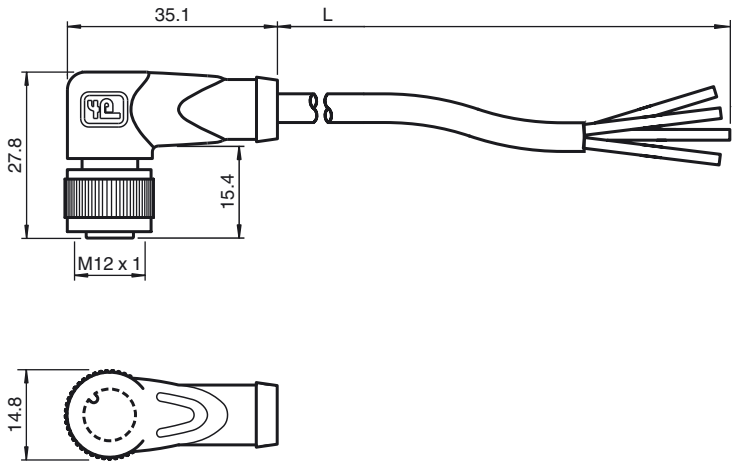

Technical data

General specifications		
Number of pins		4
Indicators/operating means		
LED green		Operating display
LED yellow		Functional display NO contact
Electrical specifications		
Operating voltage	U_B	max. 24 V DC ± 15%
Operating current	I_B	max. 4 A
Contact resistance		< 10 mΩ
Ambient conditions		
Ambient temperature		-25 ... 100 °C (-13 ... 212 °F) for temperatures over 80 °C (176 °F) reduced elongation at tear
Pollution degree		3
Mechanical specifications		
Contact elements		spring-loaded contact socket
Pin diameter		1 mm
Degree of protection		IP67 / IP68 / IP69k
Material		
Contacts		CuSn / Au
Contact surface		Au
Body		TPU, transparent
Cable		PUR
Slotted nut		Diecast zinc
Core insolation		PP
Cable		fine-strand, flexible
Sheath diameter		Ø4.8 mm
Bending radius		> 10 x cable diameter, moving
Color		grey
Cores		4 x 0.34 mm^2
Conductor construction		19 x 0.15 mm Ø
Length	L	5 m
Flammability		
Contact carrier		94 HB
Housing		94 V-2
Compliance with standards and directives		
Standard conformity		
Degree of protection		EN 60529:2000
Standards		IEC 61076-2-101:2008

Electrical connection

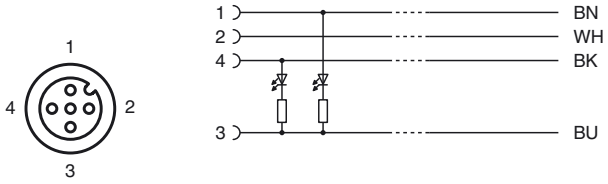

Release date: 2016-04-05 15:12 Date of issue: 2016-04-05 034441_eng.xml