
MODEL: BU-P72973

SMA Flange Mount Connecter (Female to Female)

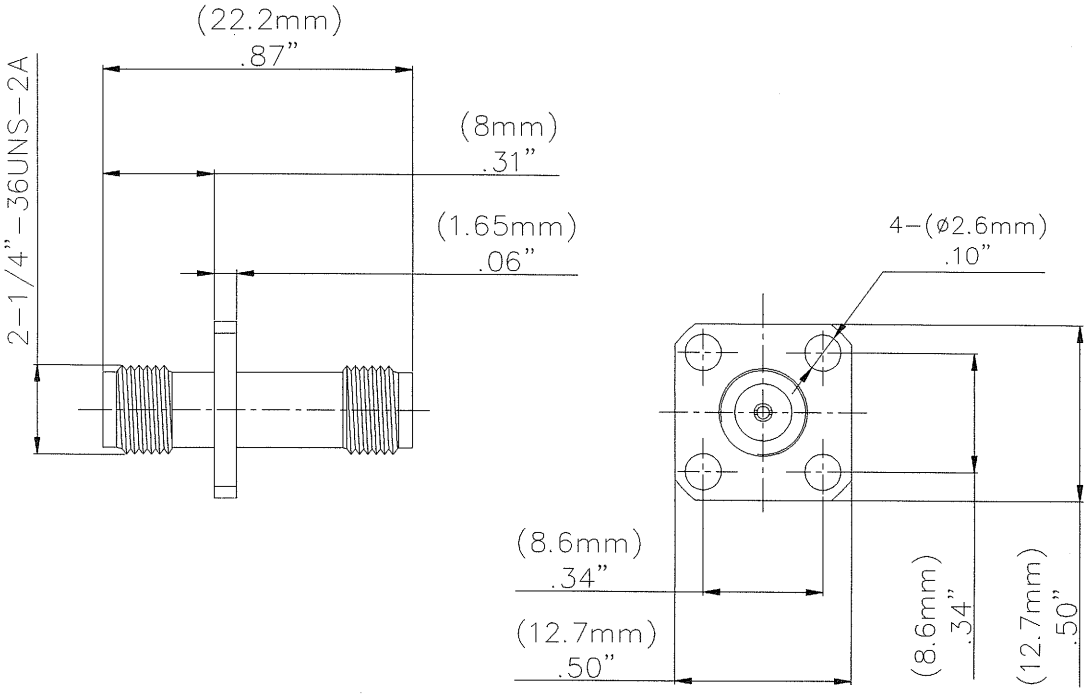

MATERIALS:
Body – Gold Plated Brass
Contacts – Gold plated Beryllium Copper
Insulator – PTFE

RATING:
Voltage: Hands free testing to 500VRMS Max.
Temperature: -50°C to 105°C
Frequency: 0 to 18 GHz
Impedance: 50 Ohms