Separate units ø 22: Heads

IP66
To be combined with a clip and electrical blocks (p. 48)
With locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

► SELECTOR SWITCHES - NON ILLUMINATED (CONTINUED)

WITH KEY — **2 positions** — Cat. No.



L21LG00

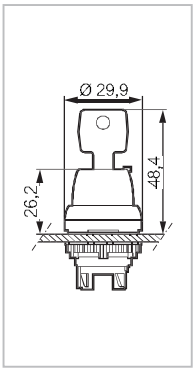

Supplied with 2 keys profile n° 455

	Key free in position:	Cat. No.
Stay-put positions - 45° ● Black	0	**L21LA00**
Spring return - 45° ● Black	0	L21LB00
Stay-put positions - 45° ● Black	0	**L21LC00**
Spring return - 45° ● Black	0	**L21LD00**
Stay-put positions - 90° ● Black	0	**L21LF00**
Stay-put positions - 90° ● Black	0 - 1	**L21LG00**
Stay-put positions - 90° ● Black	0 - 1	**L21LH00**
Stay-put positions - 90° ● Black	1	**L21LK00**

Key profile n° 1424 A and others (form p. 79)