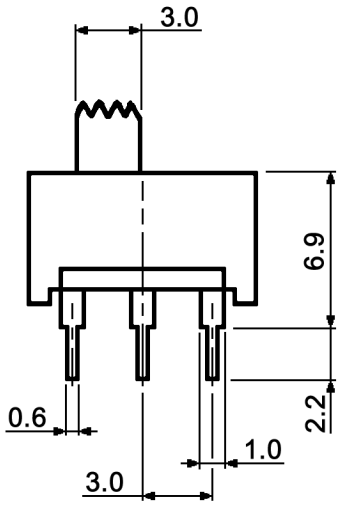

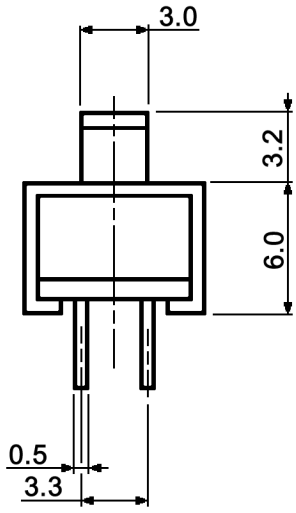

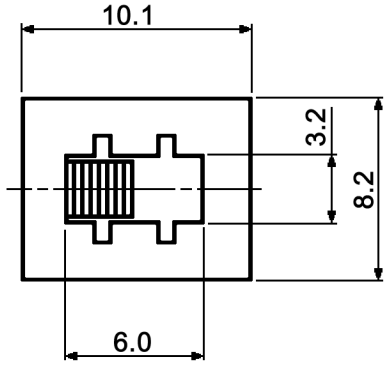

P.C. LAYOUT



Specifications:

Contact rating:	350mA, 30V DC
Contact resistance:	20mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	500V, 50Hz for duration of 1 minute
Mechanical life:	min. 10 000 cycles
Soldering conditions:	auto-soldering: max.: 260 +/-5°C. 5sec.
Timing:	non-shorting
Contacts:	copper alloy, silver plated over nickel barrier
Slide color:	black

RoHS-conform 2002/95/EC

Tolerances:			Date	Name	MFP 291 N	
			07/08	dr		
Modifications	Date	Name	knitter-switch		30 15 48	Page 1/1