rotronic

Datenblatt - Fiche technique - Data sheet

11.04.5665



ROLINE Monitor-Kabel
mit Ferritkern+DDC, HD15 ST-ST, 15m

ROLINE Câble écran HD15 M/M
avec noyaux de ferrite + DDC, 15 m

ROLINE High Quality VGA Cable
with Ferrite + DDC, HD15 M – HD15 M, 15 m

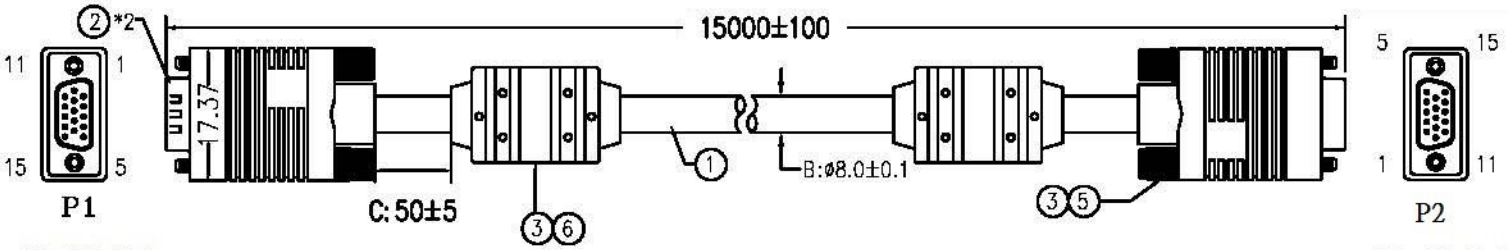

PINOUT:

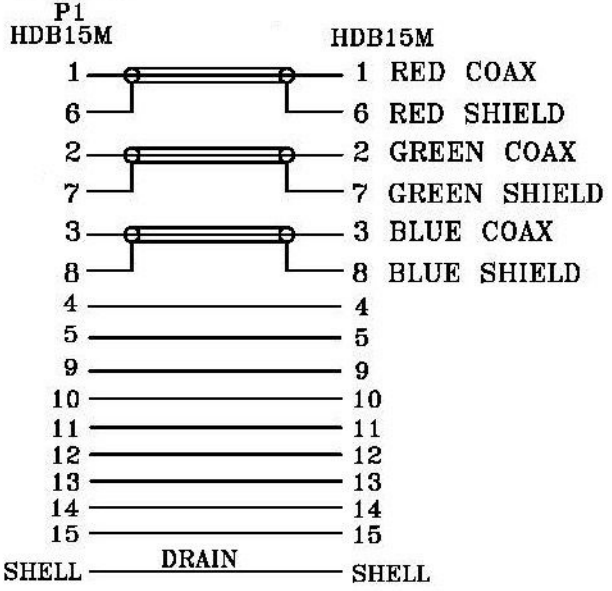

NOTES:

1) P1 & P2 HD 15 Male / Male
2) FULLY COPPER FOIL SHIELD 360° P1 & P2.
3) CABLE JACKET : PVC BLACK COLOR
4) MOLDED HOOD : BLACK COLOR
5) PIN 9 & PIN 15 CONNECTED
6) RoHS & REACH COMPLIANT
7) 2 x FERRITE CORE, BLACK COLOR

SHORT AND OPEN 100% TESTING
CONDUCTOR RESISTENCE 5Ω
INSULATION RESISTENCE 20MΩ
HI-POT: DC 250V

4	INNER JACKET: PE (RoHS)
3	OUTER JACKET PVC 45Pa BLACK(1101)(RoHS)
2	HDB15M BLUE SOLDER TYPE TERMINAL BRASS GOLD FLASH (RoHS)
1	2919 28#3C0+28#9C+ADB(AL/MG) OD:8.0 BLACK(1101) 15000MM (RoHS)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°	
DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.10mm
30.01 TO 80.00mm	±0.13mm
80.01 TO 150.00mm	±0.15mm
150.01mm	±0.20mm
MATERIAL	
FINISH	

rotronic

ROLINE HQ VGA Cable, w/Ferrite & DDC, HD 15 M/M 15m, black

11.04.5665

SCALE	SHEET	UNIT	SIZE	REV.
	1/1	MM	A4	A

WFM-ED-07B