stay connected

POTI-MODUL

MIRO 12.4, 24VDC/ outp. 0...10VDC

Transmitter
approx. 2.5 MOhm

Link to Product

Illustration



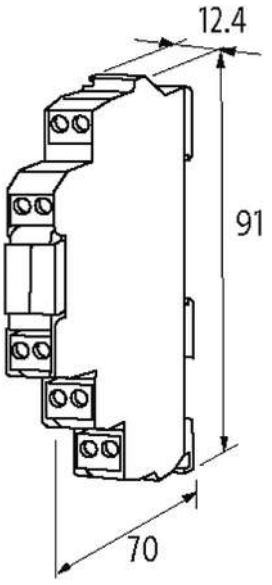

Product may differ from Image

Input

Input resistor	approx. 2.5 MOhm
Type	for 3-wire sensors or mechanical switches, NPN, (EN 61131-2)

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

Murrelektronik Ltd. | Pendlebury Industrial Estate, Albion Street, Swinton | Manchester M27 4FG | Fon +44 161 72831-33 | Fax +44 161 72831-30 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Sensor supply US	12 V DC/15 mA
Technical Data	
Operating voltage	24 V DC (20...30 V DC)
Current consumption	max. 20 mA
LED display	LED (green): Power; LED (red): Error
Linearity	max. 0.3 % from end value
General data	
Protection	IP20
Connection	Screw terminals
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+55 °C (storage temperature -30...+80 °C)
Dimensions H × W × D	91×12.4×70 mm
Output	
Output voltage	0...10 V
Output current	10 mA (short-circuit protected)
Description	
Functional description	The module is designed to connect a potentiometer. The module's output voltage can be set from 0...10 V, independently of the measuring range of the potentiometer used. Even when the potentiometer is used to 50%, the output voltage can be covered in the c
Commercial data	
country of origin	CZ
customs tariff number	85334010
EAN	4048879411738
eClass	27210990
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

Murrelektronik Ltd. | Pendlebury Industrial Estate, Albion Street, Swinton | Manchester M27 4FG | Fon +44 161 72831-33 | Fax +44 161 72831-30 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk