
KQ5006

Capacitive sensor

KQ-3067NAPKG/0,04M/AS

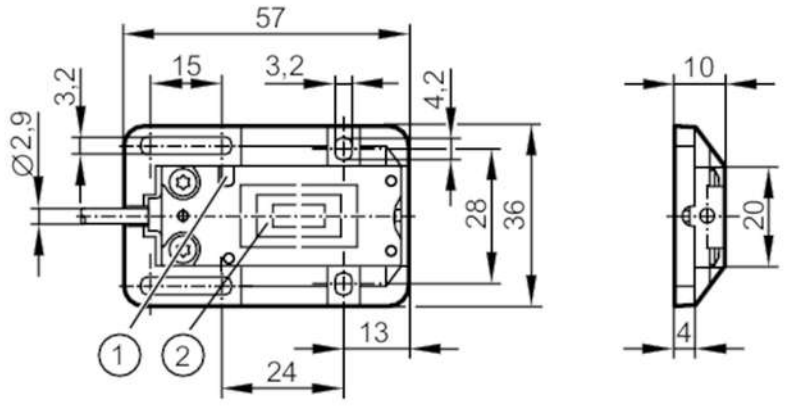

1 LED
2 Sensing face

Product characteristics		
Electrical design		PNP
Output function		normally closed
Sensing range	[mm]	8; (preset: 6,7 mm (± 10%))
Housing		rectangular
Dimensions	[mm]	20 x 7 x 48
Application		
Application		detection of seeds
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 17
Protection class		III
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally closed
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	10
Short-circuit proof		yes
Overload protection		yes
Detection zone		
Sensing range	[mm]	8; (preset: 6,7 mm (± 10%))
Sensing range adjustable		yes
Factory setting sensing range	[mm]	6.7
Accuracy / deviations		
Correction factor		glass: 0.4 / water: 1 / ceramics: 0.2 / PVC: 0.2

KQ5006

Capacitive sensor

KQ-3067NAPKG/0,04M/AS

Hysteresis	[% of Sr]	1...15	
Switch point drift	[% of Sr]	-20...20	
Operating conditions			
Ambient temperature	[°C]	-25...80	
Protection		IP 65; IP 67; IP 69K	
Tests / approvals			
EMC		EN 60947-5-2	
MTTF	[years]	771	
UL approval		Ta	-25...80 °C
		Enclosure type	Type 1
		power supply	Class 2
Mechanical data			
Weight	[g]	58.6	
Housing		rectangular	
Mounting		non-flush mountable	
Dimensions	[mm]	20 x 7 x 48	
Materials		PBT; TPE-U; stainless steel	
Displays / operating elements			
Display		switching status	1 x LED, yellow
Accessories			
Items supplied		mounting adapter: 1, fitted	
Remarks			
Pack quantity		1 pcs.	
Electrical connection - plug			

Cable: 0.045 m, PUR

Connector: 1 x M8; coding: A



KQ5006

Capacitive sensor

KQ-3067NAPKG/0,04M/AS

Connection

