Cables




- Cable with molded plug connection in varying lengths.
- Wire end with wire end ferrules, crimped ferrules, or tin-plated.
- Straight or angled plug.
- For all fan types with flat plug 2.8 / 3.0 x 0.5.


Order number	Type	L1 (mm)	Wires	Plug	Wire end	Flat push-on receptacle	Application
9920120000	**LZ120**	610	0.5 mm²	G	C	2.8 x 0.5	AC
9920120004	**LZ120-4**	2 000	0.5 mm²	G	A	2.8 x 0.5	AC
9920120005	**LZ120-5**	380	0.5 mm²	W	B	2.8 x 0.5	DC
9920120006	**LZ120-6**	610	0.5 mm²	W	B	2.8 x 0.5	DC
9920120010	**LZ120-10**	2 500	0.5 mm²	G	B	2.8 x 0.5	AC
9920120011	**LZ120-11**	2 000	0.5 mm²	G	A	2.8 x 0.5	DC
9920120013	**LZ120-13**	5 000	0.5 mm²	G	B	2.8 x 0.5	AC
9920120016	**LZ120-16**	800	0.5 mm²	G	B	2.8 x 0.5	AC
9920120017	**LZ120-17**	3 000	0.5 mm²	G	A	2.8 x 0.5	AC
9920120018	**LZ120-18**	4 000	0.5 mm²	G	A	2.8 x 0.5	AC
9920126000	**LZ126**	1 000	0.5 mm²	G	C	2.8 x 0.5	AC
9920127000	**LZ127**	1 600	0.5 mm²	G	B	2.8 x 0.5	AC
9920130001	**LZ130-1**	610	0.82 mm²	G	C	2.8 x 0.5	AC *
9920140000	**LZ140**	610	0.73 mm²	G	B	2.8 x 0.8	AC

All measurements are given in mm. * UL-approved


Cable **Straight plug (G)**

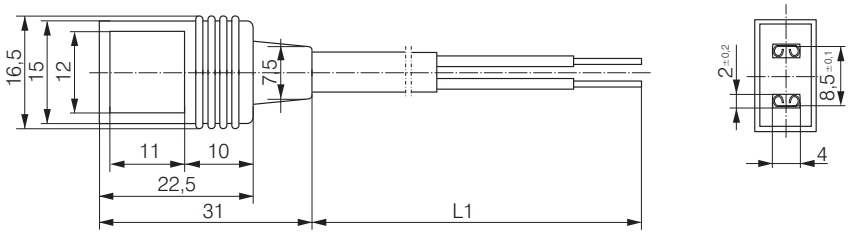


Cable **Angled plug (W)**

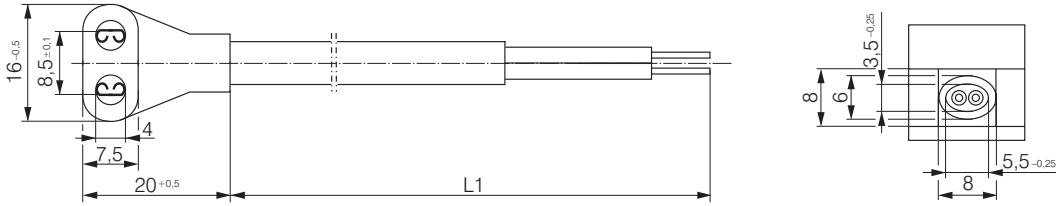

Wire end ferrules **Wire end A**



Tin-plated **Wire end B**



Wire end ferrules **Wire end C**

