
HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

Plugs

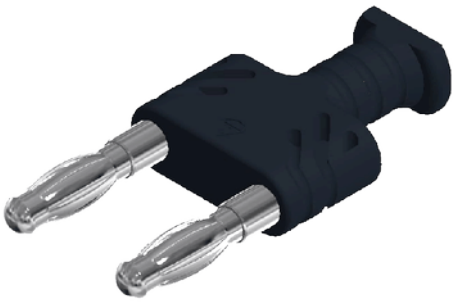

KST WS 14/4

CE

Product	KST WS 14/4
description	Jumper plug with spring-loaded 4 mm plugs and one 4 mm unsprung socket for connection with all 4 mm spring-loaded plugs that are not contact-protected. Shatter-proof insulation.
article-no. / *colour	9722651xx ● 00 black Ni
technical data	
rated voltage(1)	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (3)
rated current(1) (consider derating curve)	32 A
material plug	brass, nickel plated
housing material	PBT
temperature range acc. To IEC61010(2)	-15 °C to 70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
standard	IEC 61010

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
(3) Other circuits that are not directly connected to mains
stand: 16.07.2018

4 mm system