PSL101824

DIN RAIL SWITCHING POWER SUPPLY, SINGLE PHASE. 24VDC, 0.75A / 18W



Product designation				Switching power supplies
Product type designation				PSL1
Input characteristics				
Input type				Single phase
Rated supply voltage AC			VAC	Multivoltage 100...240
Operating range				
	AC			
		min	VAC	90
		Max	VAC	264
	DC			
		min	VDC	120
		Max	VDC	375
Rated frequency			Hz	50/60
Operational frequency				
		min	Hz	47
		max	Hz	63
Current consumption Max			mA	500
Insulation voltage Input/Output				
		AC	VAC	3000
		DC	VAC	4242
Internal fuse (250VAC)				T2A 250VAC
Output characteristics				
Rated output voltage DC			VDC	24
Voltage trimming (potentiometer) DC				
		min	VDC	21.6
		Max	VDC	28.8
Rated output current			A	0.75
Rated output power			W	18
Temperature coefficient			%/°C	±0.03
Line adjustment			%	±1
Load adjustment			%	±2
Efficency			%	77
Overload protection				110…140%
Short-circuit protection				Hiccup
Ripple & noise			mV	50
Parallel connection			N°	No
Indications				
LED indicator for power on				Yes
LED indicator for low voltage				Yes
Power Rdy (Ready - minimum limit)				No
Connections				
Terminals type				Screw
Ambient conditions				

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

PSL101824

DIN RAIL SWITCHING POWER SUPPLY, SINGLE PHASE. 24VDC, 0.75A / 18W

Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+71
	Storage temperature			
		min	°C	-25
		max	°C	+85
Derating			%/°C	2.5%/°C above 60°C

Housing

Material			Plastic
IEC degree of protection			IP20
Dimensions (W x H x D)		mm	22.5 x 90 x 115
Weight		g	226

Installations

Mounting			On 35mm DIN rail

Dimensions

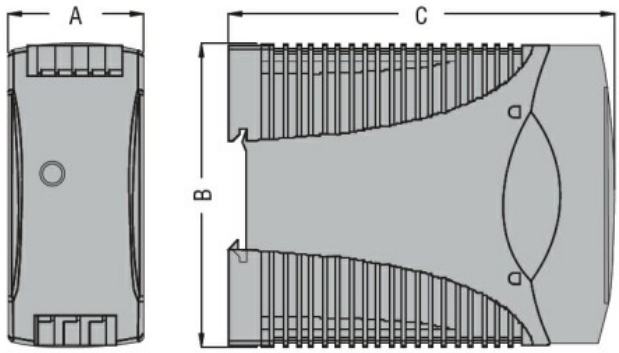

TYPE	A	B	C
PSL1 005 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 010 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 018 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 030...	40.5 (1.59")	90 (3.54")	115 (4.53")
PSL1 060...	40.5 (1.59")	90 (3.54")	115 (4.53")
PSL1 100...	54 (2.12")	90 (3.54")	115 (4.53")
PSL2 100...	54 (2.12")	90 (3.54")	115 (4.53")
PSLR 20 24	54 (2.12")	90 (3.54")	115 (4.53")

Wiring diagrams

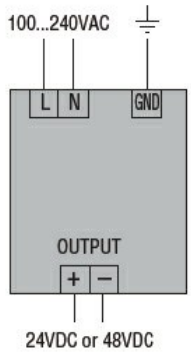

Certifications and compliance

Compliance		
	CSA C22.2 n°14	
	IEC/EN 60950-1	
	IEC/EN 61000-6-2	
	IEC/EN 61000-6-3	
	UL 508	
Certificates		
	cULus	
	EAC	
	RCM	

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding