1633ENS

Networking Cables
Datatwist® cable
CAT 5E SF/UTP LSNH
2012-07-11 v3


Applications

- Horizontal and building backbone cable
- Support current and future Category 5e applications, such as:
  1000Base-T (Gigabit Ethernet), 100 Base-T, 10 Base-T, FDDI, ATM

General standards

- International standard: ISO/IEC 11801 2nd edition (2002) and ISO/IEC 11801 Amendment 2 (2010)
- European standard: EN 50173-1 (2002) and EN 50173-1 Amendment 1 (2009)
- U.S. Standards: ANSI/TIA/EIA 568-B.2-1 (2002)

Construction & Dimensions

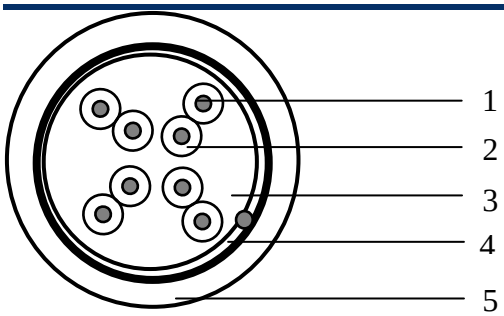

1. Conductor

Material	Solid bare copper ETP
Diameter	AWG 24

2. Insulation

Material	Polyethylene
Nominal diameter over insulation	1.05 mm

3. Cable core

Pair	2 twisted insulated conductors
Number of pairs	4, all twisted together
Colour code pair 1	White / Blue & Blue
Colour code pair 2	White / Orange & Orange
Colour code pair 3	White / Green & Green
Colour code pair 4	White / Brown & Brown
Foil	Overlapping polyester foil over cable core

4. Foil shielding

Material	Laminated Aluminium / Polyester
Position aluminium	Facing outside, in contact with drain wire
Drain wire material	Solid tinned copper
Drain wire diameter	AWG 26

©Copyright 2008, Belden Wire & Cable B.V. Netherlands • Tel. +31-(0)77-3878-555 • Fax +31-(0)77-3878-488 • E-mail: venlo.salesinfo@belden.com
All rights are reserved. Reproduction in whole or in part is prohibited without the written consent of the copyright owner.
All printing errors are subject to correction. Technical specifications are subject to change without notice.

Braid material	solid tinned copper
Coverage	≥ 30 %

5. Jacket

Material	LSNH
Diameter	6.0 ± 0.3 mm

Electrical characteristics

Reference standard: ISO/IEC 61156-5 edition 2.0 (2009)

Low frequency and D.C. (at 20°C)	Specification	Unit
D.C. resistance conductor	< 9,5	Ω/100m
Resistance unbalance: within a pair / between pairs	< 2 / < 4	%
Insulation resistance	≥ 5000	MΩ.km
Dielectric strength conductor-conductor and conductor-screen (2 sec.)	2.5	kV DC
Mutual capacitance	< 56	nF/km
Capacitance unbalance pair to ground	< 1600	pF/km
Nominal velocity of propagation (for information only)	> 0.6	c
Delay skew (differential delay)	≤ 40	ns/100m
Transfer impedance according IEC 61156-5	Grade 2	
Coupling attenuation according IEC 61156-5	Type II	

High frequency (at 20°), reference standard: ISO/IEC61156-5									
TYPE	**1***	**4**	**10**	**16**	**20**	**31.25**	**62.5**	**100**	**MHz**
Attenuation	2.1	4.0	6.3	8.0	9.0	11.4	16.5	21.3	dB/100m
NEXT	65.3	56.3	50.3	47.2	45.8	42.9	38.4	35.3	dB/100m
PS NEXT	62.3	53.3	47.3	44.2	42.8	39.9	35.4	32.3	dB/100m
ACR	63.2	52.32	44.0	39.2	36.8	31.5	21.9	14.0	dB/100m
PS ACR	60.2	49.3	41.0	36.2	33.8	28.5	18.9	11.0	dB/100m
ACR-F	64.0	52.0	44.0	39.9	38.0	34.1	28.1	24.0	dB/100m
PS ACR-F	61.0	49.0	41.0	36.9	35.0	31.5	25.1	21.0	dB/100m
Return Loss	20.0	23.0	25.0	25.0	25.0	23.6	21.5	20.1	dB/100m
TCL level 1	40.0	34.0	30.0	28.0	27.0	25.1	22.0	20.0	dB/100m
EL TCTL	35.0	23.0	15.0	10.9	9.0	5.5			dB/100m
Impedance upper limit	122.2	115.2	111.9	111.9	111.9	114.1	118.3	121.9	Ω
Impedance lower limit	81.8	86.8	89.4	89.4	89.4	87.7	84.5	82.0	Ω
Propagation delay	570	552	545	543	540	539	538	537	ns/100m

NOTE: Limits below 4MHz are for information only

©Copyright 2008, Belden Wire & Cable B.V. Netherlands • Tel. +31-(0)77-3878-555 • Fax +31-(0)77-3878-488 • E-mail: venlo.salesinfo@belden.com
All rights are reserved. Reproduction in whole or in part is prohibited without the written consent of the copyright owner.
All printing errors are subject to correction. Technical specifications are subject to change without notice.

Mechanical characteristics

	Specification	Unit
Elongation at break of the conductors	8	%
Minimum elongation at break of the insulation	≥ 100	%
Minimum elongation at break of the sheath	≥ 100	%
Tensile strength of sheath	> 9	MPa

Environmental and overall characteristics

	Specification	Unit
Maximum operating voltage (for all temperatures cable is intended to be used)	72	V D.C.
Maximum continuous current per conductor (@25°C)	1.5	A
Temperature rating installation	0 / 50	°C
Temperature rating operation	- 30 / 60	°C
Total cable weight	45	kg/km
Minimum bending radius (during operation and installation)	24 / 48	mm
Maximum pulling strength	72	N
Burning load	440	kJ/m
Smoke density acc. to IEC 61034-1/2 & EN50268-1/2; transmittance	> 60	%
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2; pH	> 4.3	
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2; Conductivity	< 10	µS/mm
Fire performance according IEC 60332-1	Pass	

Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

©Copyright 2008, Belden Wire & Cable B.V. Netherlands • Tel. +31-(0)77-3878-555 • Fax +31-(0)77-3878-488 • E-mail: venlo.salesinfo@belden.com
All rights are reserved. Reproduction in whole or in part is prohibited without the written consent of the copyright owner.
All printing errors are subject to correction. Technical specifications are subject to change without notice.