MURR ELEKTRONIK
stay connected

M12-PANEL FEED THROUGH 5 POLE B-CODED

Control cabinet entry system M12
B-coded, 5-pole, shielded

Link to Product

Illustration

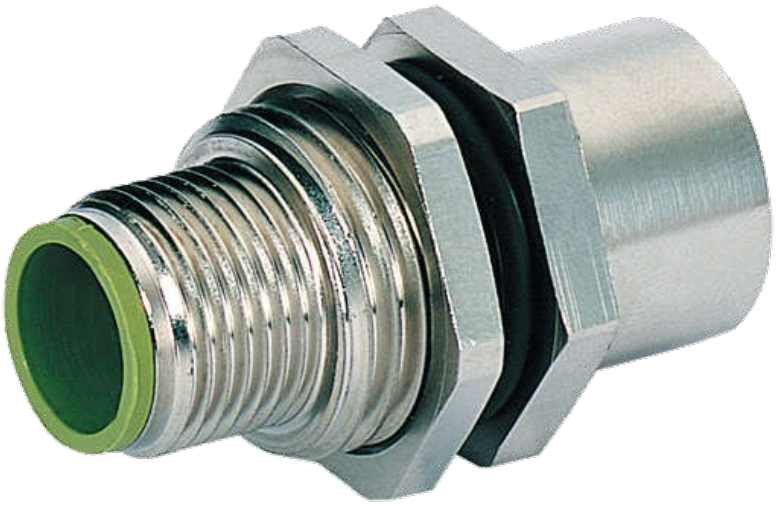

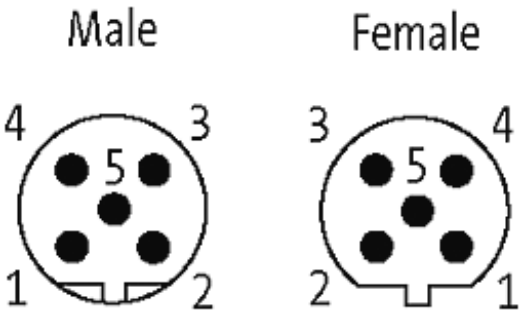

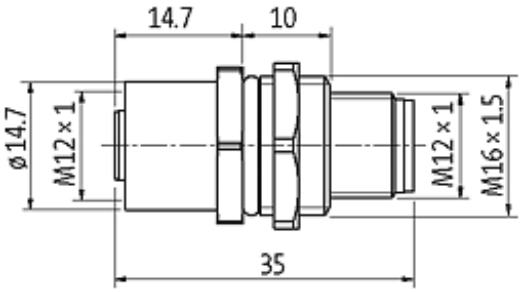

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 11/14

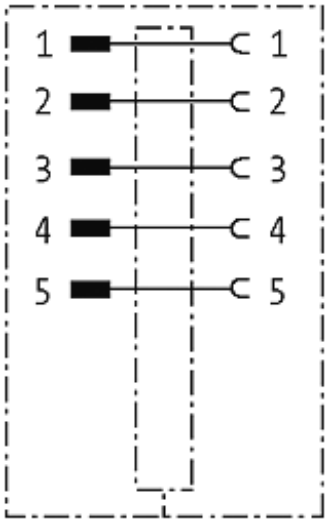

Product may differ from Image

Form	
	44111
Technical Data	
Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Protection	IP67 inserted and tightened (EN 60529)
General data	
Mounting set	M16 × 1.5 mm
Temperature range	-25...+85 °C
Commercial data	
country of origin	CZ
customs tariff number	85369010
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 11/14