**Comus Group of Companies** PRODUCT DATA SHEET

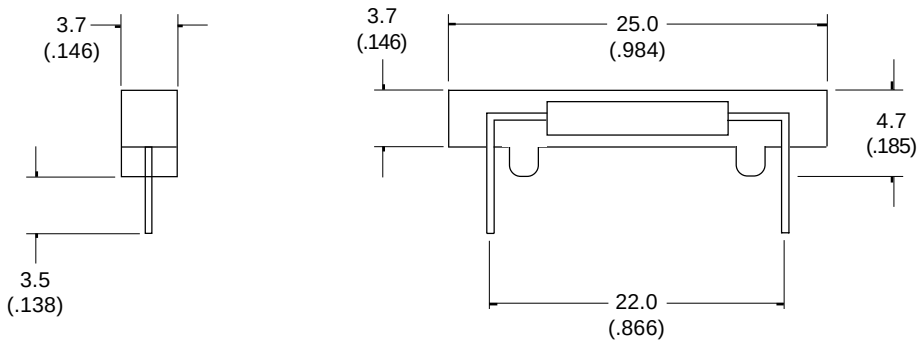


Drawings not to scale
All dimensions in mm (inches) nominal

# SPECIFICATION

| | | |
|---|---|---|
| CONTACT FORM/STYLE | | Closed |
| SWITCHING VOLTAGE | Max. Vac | 130 |
| SWITCHING CURRENT | Max. A | 0.25 |
| SWITCHING CAPACITY | Max. VA | 3 |
| CONTACT RESISTANCE | Max. mΩ | 100 |
| SWITCHING DISTANCE | Min. mm | Dependant on magnet |
| OPERATING TEMPERATURE | Deg. ˚C | -20˚ +70˚ |
| STORAGE TEMPERATURE | Deg. ˚C | -25˚ +70˚ |
| CASE MATERIAL | | Polypropylene |

**PROXIMITY SENSORS**

PART NUMBER
**PPS 130B**

| Rev. No. | Revision Note | Date | Signature |
|---|---|---|---|
| A | Web Site 2000 | 1-6-00 | RG |

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

© 2000 Copyright Comus Group of Companies

The Comus Group of Companies consist of:
Assemtech Europe Limited
E. Bachem GmbH
Comus International
W. Gunther GmbH
Gunther Belgium
Gunther France
S.T. G.