
EBC043

Splitter box

ZDO6H050MSS0010E15

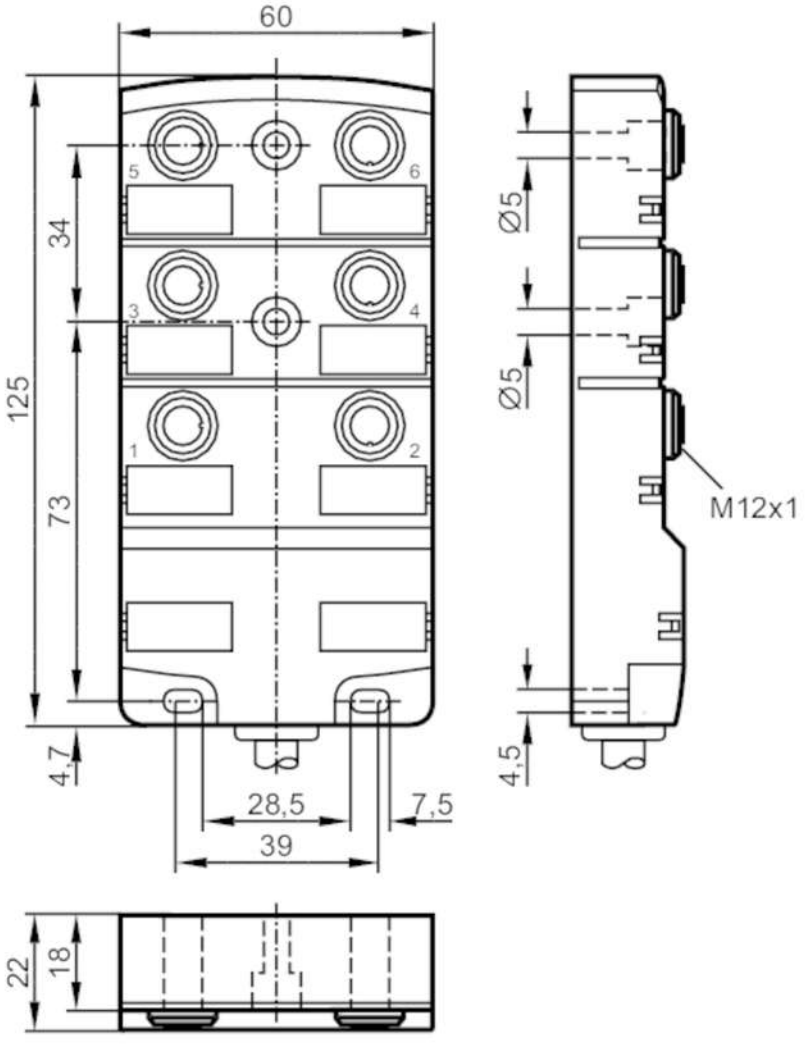

Application		
Special feature		Gold-plated contacts
Electrical data		
Operating voltage	[V]	< 30 DC; ("supply class 2" to cULus)
Max. current load per module/slot	[A]	4; (per pin: 2; per group: 8)
Max. current load total	[A]	12
Operating conditions		
Ambient temperature	[°C]	-25...40
Ambient temperature (moving)	[°C]	-5...60

EBC043

Splitter box

ZDO6H050MSS0010E15


Protection		IP 67	
Tests / approvals			
UL approval		Enclosure type	Type 1
Mechanical data			
Weight	[g]	880	
Dimensions	[mm]	22 x 60 x 125	
Materials		PA	
Moulded-body material		PA	
Number of ports splitter box		6	
Connector type		M12	
Accessories			
Items supplied		labels: 6	
Remarks			
Pack quantity		1 pcs.	

Electrical connection

Cable: 10 m, PVC, black, Ø 6.3 mm; 5 x 0.5 mm²

Electrical connection - slot

Connector: 6 x M12; coding: A; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm




EBC043

Splitter box

ZDO6H050MSS0010E15

Connection

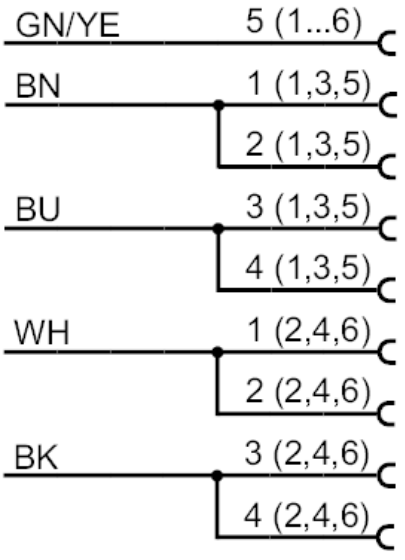

	Core colours :
BK =	black
BN =	brown
BU =	blue
GN/YE =	green/yellow
WH =	white