stay connected

MUIW ANALOG COUPLER COMPONENT

IN: 0..10 V - OUT: 4..20 mA


INPUT: 0...10 V DC
OUTPUT: 4...20 mA
Screw terminals

Input and output galvanically separated


Link to Product

Illustration



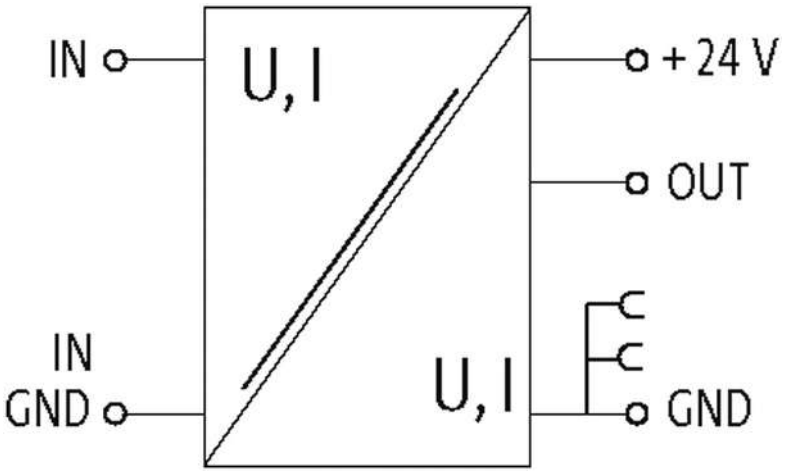

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

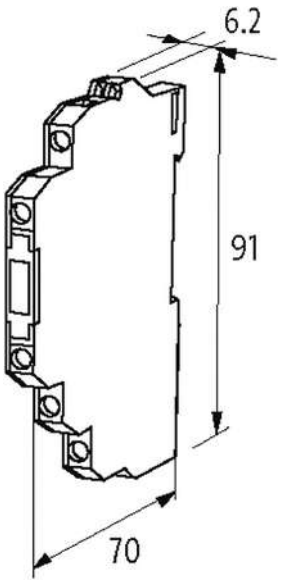

Product may differ from Image

General data	
Test isolation voltage	1.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C
Dimensions H × W × D	91×6.2×70 mm
Voltage inputs	
Input resistor	approx. 200 kOhm
Voltage output signals	
Load	max. 25 mA
Current outputs	
Load	max. 500 Ohm
Description	
Functional description	The Murrelektronik analog converters convert standard signal formats (0...10 V, 0...20 mA, 4...20 mA) galvanically separated into one of these signal formats. Due to an integrated current limiter the output is short-circuit and overload protected. Module
Commercial data	
country of origin	CZ
customs tariff number	85437090
EAN	4048879028394
eClass	27210990
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

Murrelektronik Ltd. | Pendlebury Industrial Estate, Albion Street, Swinton | Manchester M27 4FG | Fon +44 161 72831-33 | Fax +44 161 72831-30 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk