HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

## Plugs

# BUELA 30 K



CE

| Product | BUELA 30 K |
|---|---|
| description | Multiple-spring wire plug, shatter-proof, flexible insulated sleeve with transverse hole. The tapering sleeve end also serves as kinking protection for the lead. Solder connection up to maximum cable cross-section of 2.5 mm². Nickel-plated brass contact material. |
| operating instruction | BA409 |
| article-no. /<br>*colour | 9307271xx<br>00 black · 01 red · 02 blue · 03 yellow · 04 green · 07 white<br>Ni |
| **drawing** | |
| | 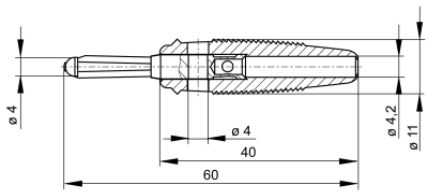 |
| **technical data** | |
| connection | solder connection |
| rated voltage(1) | 30 VAC / 60 VDC |
| measurement cat. acc. to IEC 61010 | O (3) |
| rated current(1)<br>(consider derating curve) | 30 A |
| material plug | brass, nickel plated |
| housing material | PVC-P |
| temperature range acc. To IEC61010(2) | -25 °C to +70 °C |
| standard | IEC 61010 |

4 mm system

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
(3) without rated measurement category, for other circuits that are not directly connected to mains
stand: 06.05.2019