Comus Group of Companies PRODUCT DATA SHEET

Manufactured in the UK

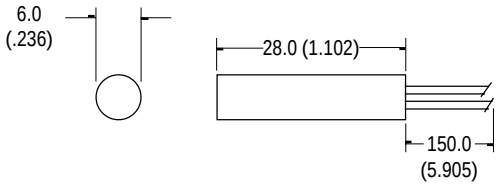

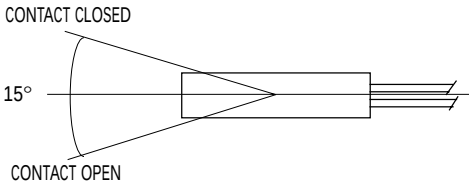

SPECIFICATION

CONTACT FORM / STYLE		-
SWITCHING VOLTAGE	Max. Vac RMS	60 Vac/dc
SWITCHING CURRENT	Max. A	0.1
SWITCHING CAPACITY	Max. VA	3
DIFFERENTIAL ANGLE	Deg.° Max.	15°
CONTACT RESISTANCE	Max. Ω	100
OPERATING TEMPERATURE	Deg. °C	-37° +100°
STORAGE TEMPERATURE	Deg. °C	-40° +125°
CASE MATERIAL		Polypropylene
CABLE / TERMINATION		2 x round 0.14² PVC covered and insulated

This product is fully sealed to give maximum mechanical protection and minimise the ingress of dust and moisture. As a guide, the product is expected to meet the requirements of IP65.

TILT SWITCH MODULE - Mercury Free

PART NUMBER
CW60S/15

Rev. No.	Revision Note	Date	Signature
B	Web Site 2000	1-5-00	RG

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

©2000 Copyright Comus Group of Companies

The Comus Group of Companies consist of:
Assemtech Europe Limited
E. Bachem GmbH
Comus International
W. Gunther GmbH
Gunther Belgium
Gunther France
S.T.G.