Technical specifications

FORKED WEBBING LANYARD 1.15m

Forked webbing lanyard with shock absorber + 2 GO60 + twistlock karabiner.

Reference : 1015859

Features

Black webbing :
Width : 25mm
Material : polyester
Breaking strength : > 2300 daN

Shock absorber:
Material : Polyester / Polyamide
Breaking strength : > 1500 daN

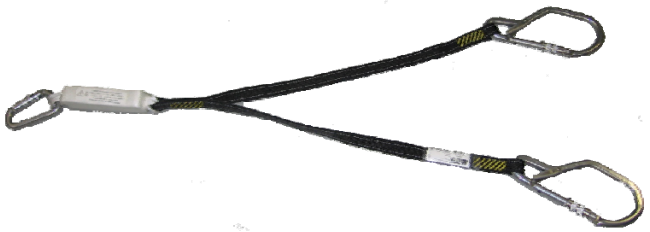

Twistlock karabiner :
Material : Aluminium
Opening :16mm
Standards : EN 362
Breaking strength : > 2800 daN

2 x karabiner GO60 :
Material : Aluminium
Opening : 60mm
Standards : EN 362
Breaking strength : > 2200 daN

Test : Static test: > 15 KN
Weight **:** 0.802 kg
Temperature of use **:** -30°C to +50°C

EN 355 : Shock Absorber / ATEX EN 13463-1 (2001)

LAW of 19 MARCH 93

PPE are products classified in category III, mortal risks, and as such they have to be the object of a periodic inspection for less than twelve months at the time of its use by the qualified person.

For more information, please contact our technical team at 02 48 52 40 42 or by e-mail techniserv.hsp@honeywell.com

HONEYWELL FALL PROTECTION FRANCE SAS
35-37 rue de la Bidauderie
F - 18100 Vierzon - France
Tel : +33 2 48 52 40 40
Fax : +33 2 48 71 04 97
Web site : www.honeywellsafety.com