
multimec® 3F+1T/1U/1V







Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  low temp: -40/+115ºC
  high temp: -40/+160ºC


Dimensions (through-hole)

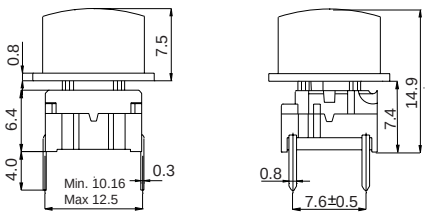


PCB layout

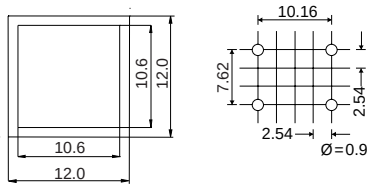


Dimensions (w/LED)

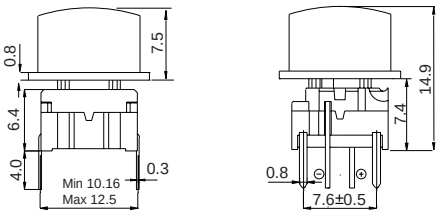


PCB layout (top wiew)

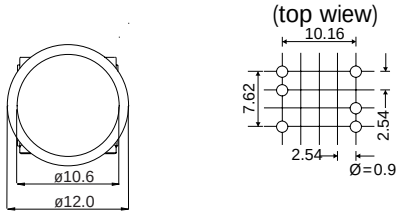

Dimensions (SMD)

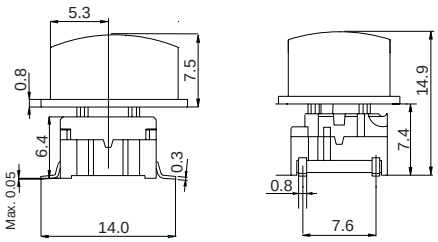

PCB layout

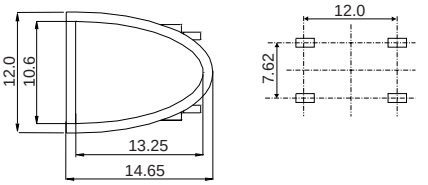

HOW TO ORDER

3 F	☐	☐☐	+	☐☐	☐☐
Switch	Mounting T through-hole S surface mount	L 6 low temp. H 9 high temp.		Cap 1T 1U 1V	00 blue 03 grey 08 red 09 black custom colours on request

Standard versions:
3FTL6
3FTH9
3FSH9
3FSH9R

3 F	T	☐☐	☐☐	+	☐☐	1 6
Switch	Mounting T through-hole	L 6 low temp. H 9 high temp.	LED 23 green 45 yellow 88 red		Cap 1T 1U 1V	transparent white

Standard versions:
3FTL623
3FTL645
3FTL688

Ordering example: 3FTL645 + 1V16

mec· Industriparken 23 · P.o. Box 26 · DK-2750 Ballerup · Denmark
Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · E-mail: danmec@mec.dk · www.mec.dk

mec a/s nov. 2003