prevost
Compressed Air Expert

ALTO - COMPRESSED AIR TREATMENT UNITS

ALTO - Submicronic filter set with regulator and gauge



Part number	Female thread	Pressure (bar)	Flow rate at 7 bar (l/min) (ΔP= 1 bar)	Temperature min/ max (°C)	Max. operating pressure (bar)	Filtration (µm)	Net weight (Kg)
KTB CSM3	G1/2	7	1500.00	5.00 / 50.00	12.00	0.01	2,4

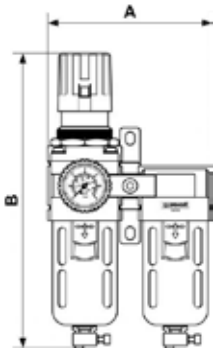

Part number	Dim. A (mm)	Dim. B (mm)
KTB CSM3	156.00	280.00