Specifications

Eaton 291477

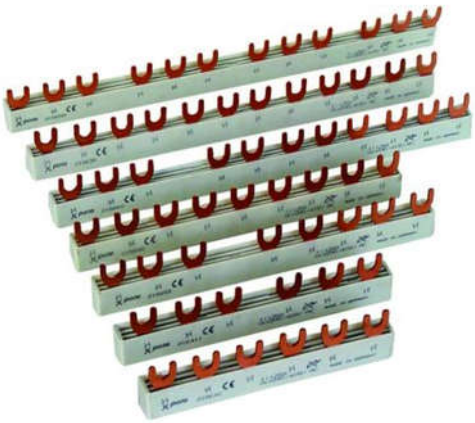

Catalog Number: 291477

Eaton Moeller series xPole - Busbar. EV busbars 3Ph., 4+5HP, for combined FI-/LS unit with 4 p-FI, 16

General specifications

Product Name	**Catalog Number**
Eaton Moeller series busbar	291477
EAN	**Product Length/Depth**
4015082914776	33 mm
Product Height	**Product Width**
10.4 mm	156 mm
Product Weight	**Compliances**
0.084 kg	RoHS conform
Certifications	**Catalog Notes**
CE	No end caps required, do not shorten

Powering Business Worldwide

Product specifications

Used with

Four-pole residual current devices with circuit breakers
EVG
Busbar

Type

Busbar
EVG

Features

Insulated

Accessory/spare part type

Busbar for combined residual current/power circuit breaker
Busbar for miniature circuit breaker
Busbar for residual current circuit breakers

Electric connection type

Fork

Rated surge voltage

4 KV

Rated uninterrupted current (Iu)

80 A

Suitable for number of devices

5

Number of poles

Three-pole

Color

Other

Rated short-time withstand current (Icw)

0 kA

Cross section

16 mm²

Number of modular spacings

5

Number of phases

3

Pitch dimensions

0 mm

Resources

Declarations of conformity

DA-DC-03_EVG

Drawings

eaton-mcb-busbar-dimensions-008.eps

eaton-busbar-3d-drawing.jpg

eaton-mcb-busbar-3d-drawing-007.eps

Rated operational voltage (Ue) - max

415 V

Rated conditional short-circuit current (Iq)

25 kA

Functions

Busbar

Suitable for

Devices with N-busbar

Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Eaton.com/socialmedia