Kelvin-Messleitung mit Zangen

- 4 Federkorbstecker, stapelbar, konfektioniert an flexibler PVC-Leitung 0,22 mm² und 2 Zangen
- Speziell für Vierleitermessungen entwickelt
- Maulöffnung der Zange max. 15 mm
- den Warnhinweis WH 003 finden Sie unter www.schuetzinger.de

Best.-Nr.
KML 7528 / 2ZA / 4x0.22 / 22

• Kontaktteile	**vergoldet**
• Leitung	0,22 mm² PVC-isoliert
• Isolierteile	PA (Polyamid) PP (Polypropylen)
• **Farben**	siehe Tabelle
• Schaltplan	1 _____ A 2 _____ B 3 _____ C 4 _____ D

Kelvin measuring lead with pincers

- *4 lamella-basket plugs, stackable, assembled on flexible PVC cable 0.22 mm² and 2 pincers*
- *developed especially for four-wire measurement*
- *pincer opening 15 mm max.*
- *please visit www.schuetzinger.de to find the warning notice WH 003*

Order No.
KML 7528 / 2ZA / 4x0.22 / 22

• *contact parts*	***gold-plated***
• *cable*	*0.22 mm² PVC insulated*
• *Insulation*	*PA (Polyamid) PP (Polypropylen)*
• ***colours***	*see table*
• *circuit*	*1 _____ A* *2 _____ B* *3 _____ C* *4 _____ D*



WH 003

WH 003

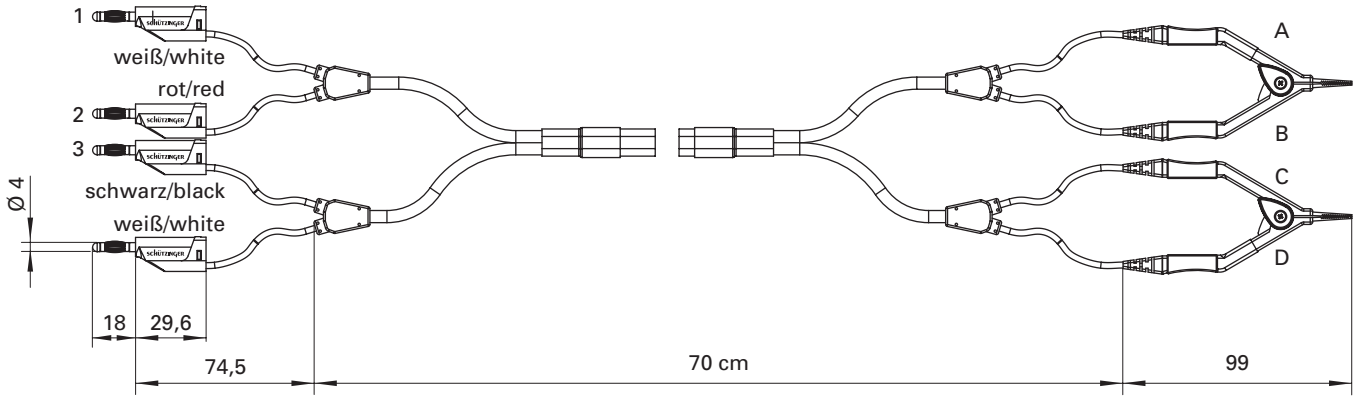

Allgemeine Angaben	
Best.-Nr. [1]	**KML 7528 / 2ZA / 4x0.22 / 70** Kontaktteile vergoldet
Farben	schwarz, rot, weiß
Längen	70 cm
Technische Daten	
Leitung	PVC-isoliert 0,22 mm²
Durchgangswiderstand	90 mΩ
Bemessungsspannung [2]	33 V_{AC} / 70 V_{DC}
Bemessungsstrom [2]	1 A per Leitung

[1] andere Kontaktoberflächen, Farben und Längen auf Anfrage
[2] bei normalen Umgebungstemperaturen

General information	
Order No. [1]	***KML 7528 / 2ZA / 4x0.22 / 70*** *contact parts gold-plated*
colours	*black, red, white*
lengths	*70 cm*
Technical data	
cable	*PVC insulated 0.22 mm²*
transition resistance	*90 mΩ*
rated voltage [2]	*33 V_{AC} / 70 V_{DC}*
rated current [2]	*1 A per lead*

[1] *other contact platings, colours and lengths on request*
[2] *at normal ambient temperatures*