
AN - PROTWIST® SCREWDRIVERS FOR SLOTTED HEAD SCREWS - MILLED BLADES | AN3,5X100



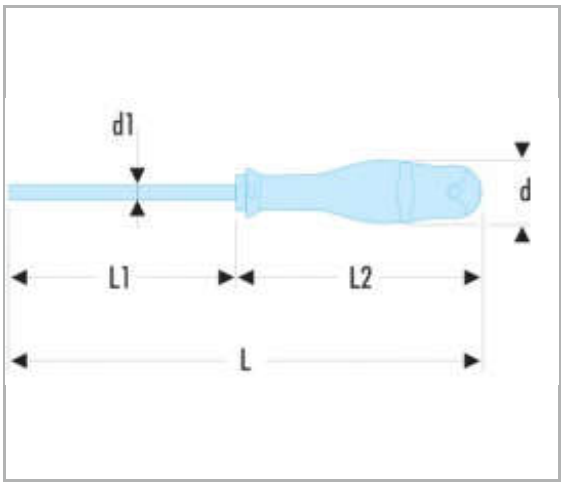

Norm :

NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600

Description

• Round shank for access in wells.
• Extra-long shank up to 300 mm for difficult and remote access.
• Silicon carbon blade: strong and resistant to flexion.
• Bi-material grip resists to impacts, abrasion, and chemicals.
• Finish: black tipped mat chromed blade.

Information

A [mm]	3,5
d [mm]	25
E [mm]	0,6
L [mm]	203
L2 [mm]	103
[g]	43

FACOM 2014 ©