PRODUCT DETAILS

**ARTICLE: 16643FV**

## WHEEL E 160X50/60 RB SWIVEL FORK M40 + BRAKE




### Wheel series E

Wheels with elastic solid rubber tyre bonded to die-cast aluminum centre.
Available with ball bearings or roller bearings.
Wheel fitted with standard roller bearing.


### Castor series M40

M40 series, medium-heavy duty pressed steel forks, swivel with double ball races & 'water resistant' protections. Zincplated.
Leading brake, total stop, adjustable.




### Technical data

| | | |
|---|---|---|
| Wheel diameter | D | 160 mm |
| Tyre width | E | 50,0 mm |
| Bore diameter | d | 20 mm |
| Weight article | | 4,150 kg |
| Hub width | L | 60 mm |
| Overall height | H | 208 mm |
| Top plate outer dimensions | AxB | 135x110 mm |
| Bolt hole spacing | axb | 105x75 mm |
| Bolt hole spacing | axb | 105x80 mm |
| Fixing bolt diameter | g | M12 |
| Offset | F | 62 mm |
| Fork width | U | 60 mm |
| Load Capacity | | 300 kg |

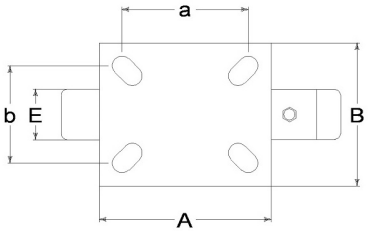


#### Related Articles

Spare part wheel: 2055
Basic version: 16643
Version with footguard: 16643PP
Version with trailing brake: 16643FR
Version with trailing brake and footguard: 16643FRPP
Version with leading brake and footguard: 16643FVPP

**GENERAL INFORMATION / RECOMMENDATIONS AND WARNINGS**
The cited text and the complete catalogue in their most up-dated versions are available in the OEM's website page www.lagspa.it/downloads. The dimensions, descriptions, specifications and illustrations herein are indicative and subject to variations without notice. The fact that products are illustrated herein does not necessarily imply they are available from stock nor does it place us under any obligation to supply them.
Tests carried out refer to the original products with original accessories: the replacement of one of the components with others of different manufacture might prevent the same results from being achieved and will automatically invalidate any guarantee. Please contact our technical service concerning any special application.