
BUSCH-JAEGER

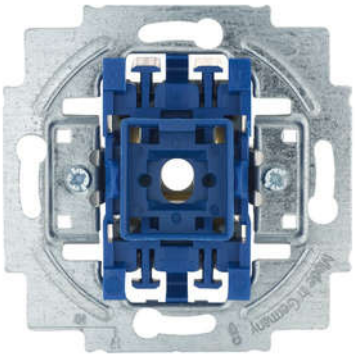

Push-switch mechanism SP, with normally open contact (operating current)

Functions at a glance

- With N terminal.
- Rated voltage: 250 V~
- Rated current: 10 A
- Protection class (device): IP 20
- Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Order details

Article No.:	2020 US
Order No.:	2CKA001413A0475
EAN:	4011395045503
Customs tariff number:	85365080
Price group:	02
Price:	10,44 EUR plus VAT

Downloads


Certificates

» EU-declaration of conformity
» ROHS product declaration


Tips / Tricks

» Installation instructions


Dimensions

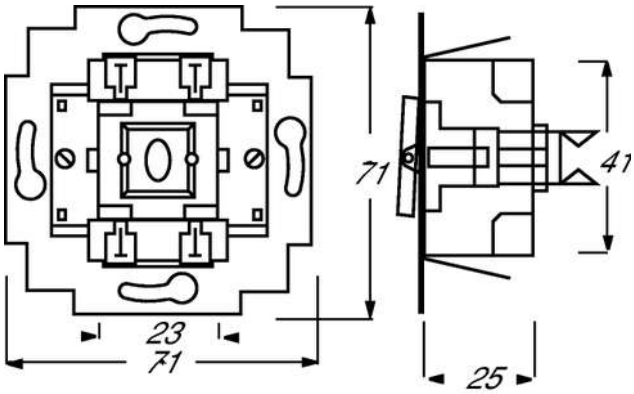

Wiring diagram

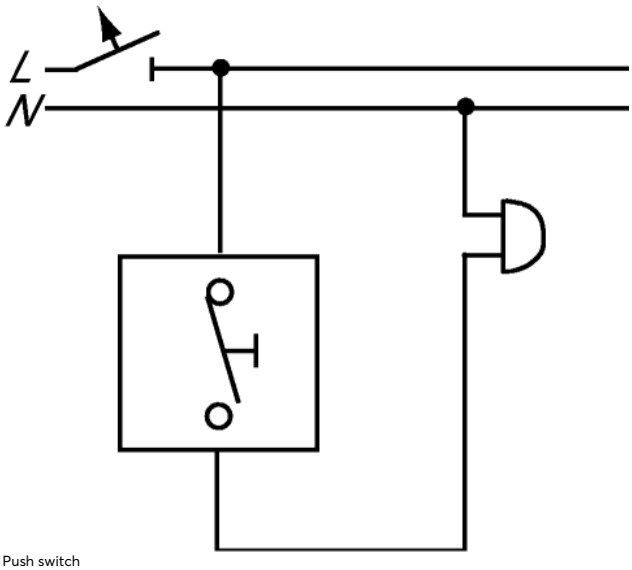

Push switch

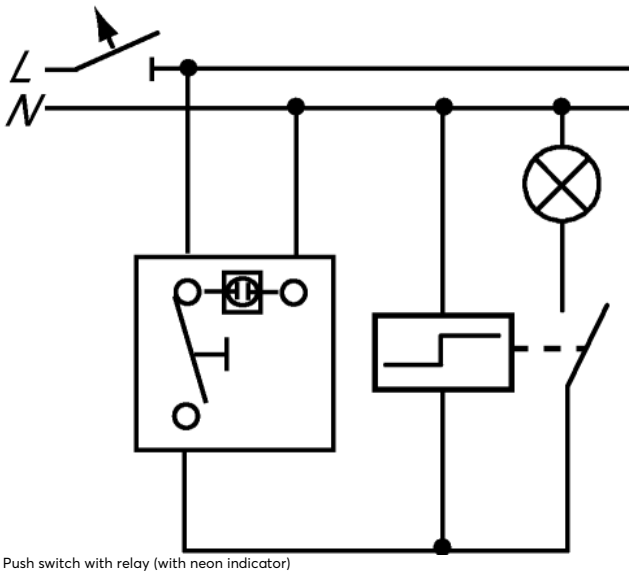

Push switch with relay (with neon indicator)