



## Model Number

**GLV18-8-H-120/115/120**

Background suppression sensor
with 2 m fixed cable


## Features

- Efficient Line in a short M18 plastic housing for standard applications
- Best background suppressor in its class
- Minimal black-white difference
- 4 LEDs indicator for 360° visibility
- Optimized potentiometer design for a clear control button layout in the application


## Product information

The GLV/GLK18 series sensors help improve the efficiency of machines and systems. The design of the M18 plastic housing, the connection technology, and sensor properties are highly standardized. Concentrating on the key sensor requirements has produced a robust and reliable product series for DC and AC/DC voltage systems without any over-engineering. The mounting set included in the scope of delivery and the optimized potentiometer design ensure fast assembly and easy configuration.

## Dimensions

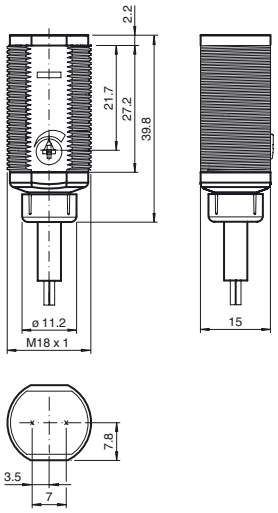



## Electrical connection

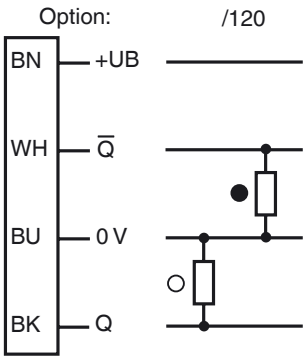


○ = Light on
● = Dark on

## Indicators/operating means

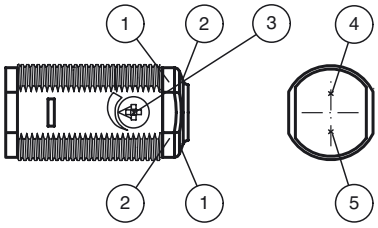


| | | |
|---|---|---|
| 1 | Operating display | green |
| 2 | Signal display | yellow |
| 3 | Detection range adjuster | |
| 4 | Emitter | |
| 5 | Receiver | |

Release date: 2014-12-17 08:00 Date of issue: 2014-12-17 212927_eng.xml

## Technical data

| | | |
|---|---|---|
| **General specifications** | | |
| Detection range | | 10 ... 120 mm |
| Detection range min. | | 10 ... 40 mm |
| Detection range max. | | 15 ... 120 mm |
| Adjustment range | | 40 ... 120 mm |
| Reference target | | 100 mm x 100 mm Kodak white |
| Light source | | LED |
| Light type | | modulated visible red light , 640 nm |
| Black/White difference (6 %/90 %) | | < 6 % |
| Diameter of the light spot | | approx. 6 mm at detection range 120 mm |
| Angle of divergence | | approx. 2 ° |
| Optical face | | frontal |
| Ambient light limit | | 30000 Lux |
| Hysteresis | H | < 2 % |
| **Functional safety related parameters** | | |
| $MTTF_d$ | | 1340 a |
| Mission Time ($T_M$) | | 20 a |
| Diagnostic Coverage (DC) | | 0 % |
| **Indicators/operating means** | | |
| Operation indicator | | LED green, statically lit Power on |
| Function indicator | | LED yellow: lights when object is detected |
| Control elements | | Detection range adjuster |
| **Electrical specifications** | | |
| Operating voltage | $U_B$ | 10 ... 30 V DC |
| No-load supply current | $I_0$ | < 15 mA |
| **Output** | | |
| Switching type | | light/dark on |
| Signal output | | 2 PNP, complementary, short-circuit protected, open collectors |
| Switching voltage | | max. 30 V DC |
| Switching current | | max. 100 mA |
| Voltage drop | $U_d$ | ≤ 1.5 V DC |
| Switching frequency | f | 500 Hz |
| Response time | | ≤ 1 ms |
| **Ambient conditions** | | |
| Ambient temperature | | -25 ... 60 °C (-13 ... 140 °F) |
| Storage temperature | | -30 ... 70 °C (-22 ... 158 °F) |
| **Mechanical specifications** | | |
| Degree of protection | | IP67 |
| Connection | | 2 m fixed cable |
| Material | | |
| Housing | | PC |
| Optical face | | PMMA |
| Cable | | PVC |
| Mass | | approx. 75 g |
| **Compliance with standards and directives** | | |
| Standard conformity | | |
| Product standard | | EN 60947-5-2:2007<br>IEC 60947-5-2:2007 |
| **Approvals and certificates** | | |
| Protection class | | II, rated insulation voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1 |
| UL approval | | cULus Listed, Class 2 Power Source |
| CCC approval | | CCC approval / marking not required for products rated ≤36 V |

## Accessories

**CPZ18B03**
Mounting Bracket with swivel nut

**BF 18**
Mounting flange, 18 mm

**BF 18-F**
Mounting flange with dead stop, 18 mm

**BF 5-30**
Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm

Other suitable accessories can be found at www.pepperl-fuchs.com


Release date: 2014-12-17 08:00 Date of issue: 2014-12-17 212927_eng.xml




Refer to "General Notes Relating to Pepperl+Fuchs Product Information".
Pepperl+Fuchs Group www.pepperl-fuchs.com
USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com
Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com
Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com
PEPPERL+FUCHS SENSING YOUR NEEDS

## Curves/Diagrams

### Characteristic response curve

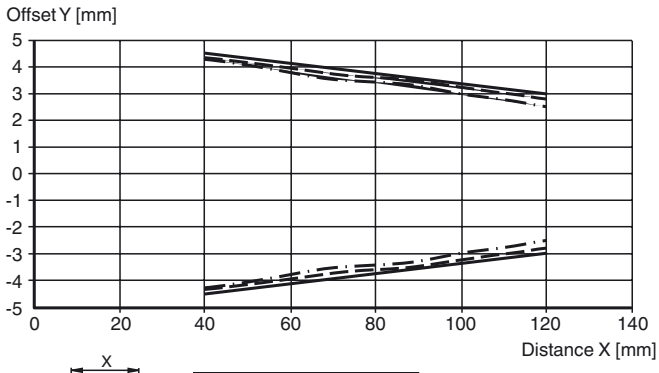


### Difference in detection distance

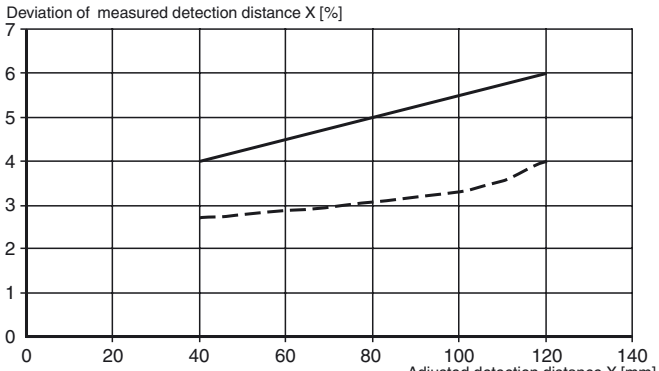


Release date: 2014-12-17 08:00 Date of issue: 2014-12-17 212927_eng.xml