KombiSIGN 70 / Permanent Beacon 840

# Perm. light element 12-230VAC/DC GN



| | |
|---|---|
| **Part No.:** | **840.200.00** |
| **Series:** | **KombiSIGN 70** |

| **MECHANICAL DATA** | |
|---|---|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Green |
| Protection category | IP54 |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 66 g |
| Product weight | 66 g |

| **ELECTRICAL DATA** | |
|---|---|
| Operating voltage | 12-230V |
| Operating voltage type | AC/DC |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

| **OPTICAL DATA** | |
|---|---|
| Light colour | Green |
| Service life optical | depends on bulb |


| **APPROVAL DATA** | |
|---|---|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with RED directive | No |
| Conform with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with GL | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / Permanent Beacon 840

# Perm. light element 12-230VAC/DC GN

**DRAWING**

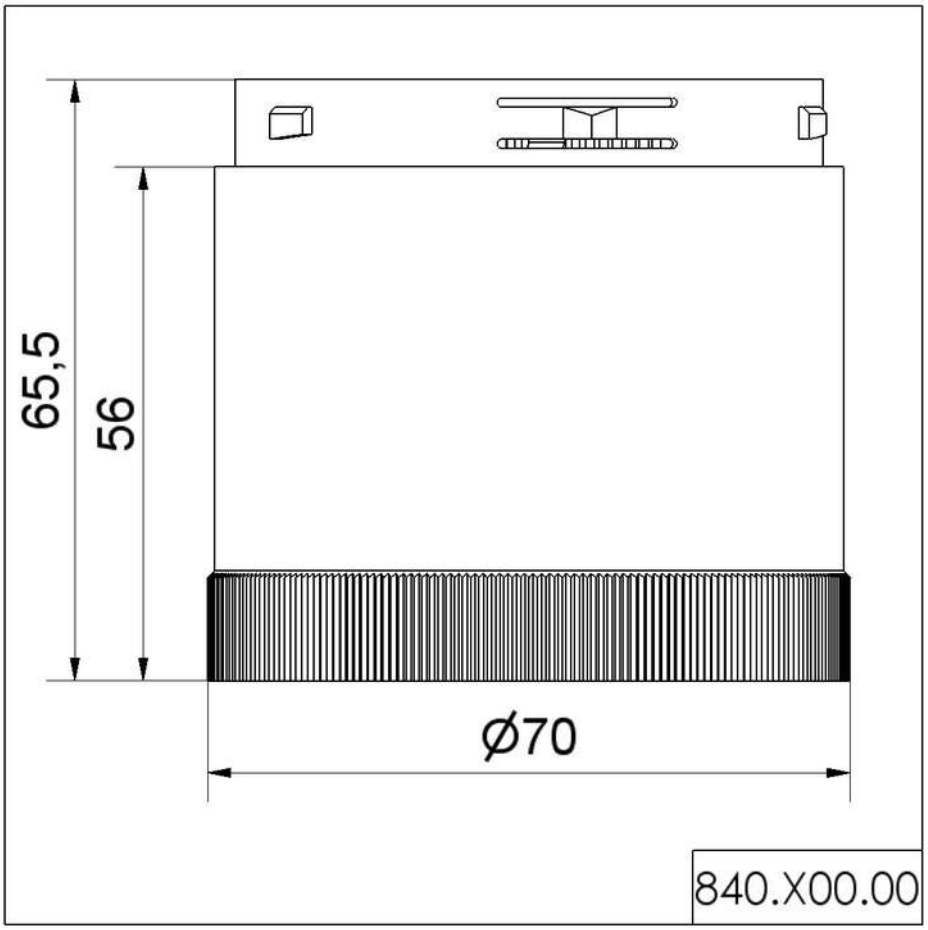


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.