View product details on medias

14.07.2025, 16:34:21 IST

SCHAEFFLER



FAG

UKP209

Plummer block housing unit

Plummer block housing units UKP, cast iron housing, with long base, radial insert ball bearing with adapter sleeve, RSR seals

Technical information



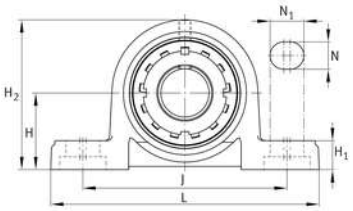

Your current product variant

Material	GG	Grey cast iron
Housing clearance	J7	Normal swivel torque

Main Dimensions & Performance Data

d	40 mm	Bore diameter
L	190 mm	Length total
H_2	106 mm	Height
≈m	2.29 kg	Weight

Mounting dimensions

J	146 mm	Distance fixing bore
N	17 mm	Width (slot)
N_1	21 mm	Length (slot)

Dimensions

H	54 mm	Distance shaft axis
A	54 mm	Width (base)
H_1	20 mm	Heigth (base)
B_1	50 mm	Locking collar total width
Q	M6	Connection thread for lubrication

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website: Contact form

Additional information

	P209	Housing
	UK209	Bearing designation

Temperature range

T_{min}	-20 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website: Contact form