

128, av. du Maréchal-de-Lattre-de-Tassigny - 87045 LIMOGES Cedex
Tel.: +33(0)5 55 06 87 87 - Fax: +33(0)5 55 06 88 88
www.legrand.com

Céliane™
Finishing plates Poudré

Cat. No(s): 0 667 01/02/03/04/05/06/08/09/11/12/13/14/15/16/18/19
0 667 21/22/23/24/25/26/28/29/31/32/33/34/35/36/38/39
0 667 41/42/43/44/45/46/48/49/51/52/53/54/61/62/63/64/71/72/73



0 667 01/11/21/31/40/41/51/61/71

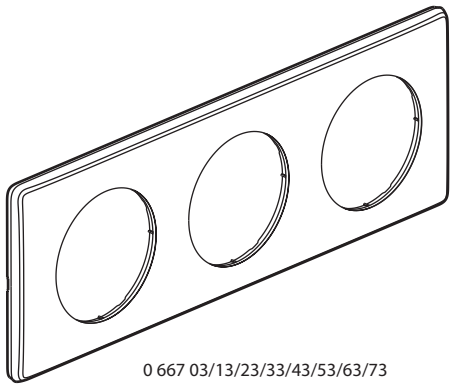

0 667 03/13/23/33/43/53/63/73

1. USE

Faceplates for 1-gang to 4-gang wiring accessories.
Horizontal or vertical mounting.


2. RANGE

Plates 1 gang




Craie	0 667 01
Argile	0 667 11
Grès	0 667 21
Schiste	0 667 31
Basalte	0 667 41
Bordeaux	0 667 51
Vieux Rose	0 667 61
Bleu Vert	0 667 71

Plates 2 gang - 71 mm spacing




Craie	0 667 02
Argile	0 667 12
Grès	0 667 22
Schiste	0 667 32
Basalte	0 667 42
Bordeaux	0 667 52
Vieux Rose	0 667 62
Bleu Vert	0 667 72

Plates 2 gang - 57 mm spacing



Craie	0 667 08
Argile	0 667 18
Grès	0 667 28
Schiste	0 667 38
Basalte	0 667 48


Extended plates 2 gang



Craie	0 667 05
Argile	0 667 15
Grès	0 667 25
Schiste	0 667 35
Basalte	0 667 45


2. GRANGE *(continued)*

Plates 3 gang - 57 mm spacing




Craie	0 667 09
Argile	0 667 19
Grès	0 667 29
Schiste	0 667 39
Basalte	0 667 49

Plates 3 gang - 71 mm spacing




Craie	0 667 03
Argile	0 667 13
Grès	0 667 23
Schiste	0 667 33
Basalte	0 667 43
Bordeaux	0 667 53
Vieux Rose	0 667 63
Bleu Vert	0 667 73

Extended plate 3 gang




Craie	0 667 06
Argile	0 667 16
Grès	0 667 26
Schiste	0 667 36
Basalte	0 667 46

Plates 4 gang - 71 mm spacing



Craie	0 667 04
Argile	0 667 14
Grès	0 667 24
Schiste	0 667 34
Basalte	0 667 44
Bordeaux	0 667 54
Vieux Rose	0 667 64

3. DIMENSIONS (mm)

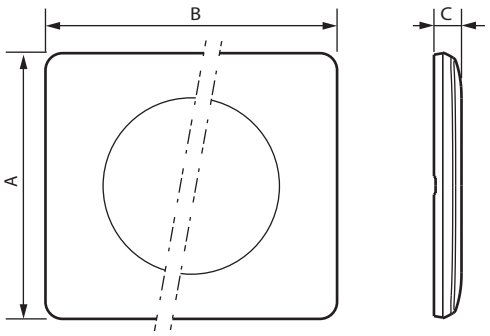

Cat. Nos	A	B	C
0 667 01/11/21/31/41/51/61/71	82	90	8,5
0 667 02/12/22/32/42/52/62/72	82	161	8,5
0 667 05/15/25/35/45	82	161	8,5
0 667 03/13/23/33/43/53/63/73	82	232	8,5
0 667 06/16/26/36/46	82	232	8,5
0 667 04/14/24/34/44/54/64	82	303	8,5
0 667 08/18/28/38/48	82	147	8,5
0 667 09/19/29/39/49	82	204	8,5

4. TECHNICAL CHARACTERISTICS

■ 4.1 Material characteristics

PC + ABS

Halogen-free
UV-resistant

Self-extinguishing: 650°C/30 s

■ 4.2 Climate characteristics

Storage temperature: - 10°C to + 70°C
Usage temperature: - 5°C to + 50°C

5. CLEANING

Clean the surface with a cloth.
Do not use acetone, tar-remover, trichloroethylene.

Resistance to the following products: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Pure bleach to 10%, Window-cleaning products, Pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

6. SPECIAL USE

The plates must not be painted.