Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
Rs-online

46-
2T00.10J0.000



https://rs-online.eao.com/component/46-2T00.1...

Your product:



46-2T00.10J0.000
Actuator

FRONT

Front dimension:	Ø 29 mm
Front form:	Round
Front bezel colour:	White
Front bezel material:	Plastic

MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens cap colour:	Blue
Lens cap material:	Plastic
Lens cap shape:	flush
Lens cap optical effect:	transparent
Illumination colour:	Blue

ELECTRICAL CHARACTERISTICS

Protection class:	II

MECHANICAL CHARACTERISTICS

Tightening torque:	1 … 2.5 Nm (8.8 … 22.1 Lb-in)

Weight:	0.009 kg

AMBIENT CONDITION

IP front protection:	IP65
IK front protection:	IK03
Operating temperature:	– 25 °C ... + 55 °C
Shock resistance:	30g, 18ms (EN-IEC 60068-2-27) 50g, 11ms (EN-IEC 60068-2-27)
Vibration resistance:	5g f= 2...500Hz (EN-IEC 60068-2-6)
Climate resistance:	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

CERTIFICATE

Approbations:	CSA, EAC, UL
Conformities:	CE
REACH:	REACH compliant
RoHS:	RoHS compliant
Standards:	CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508


OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 29 mm, Round, White, Plastic, IP65, IK03, Blue

Housing colour: White

Housing material: Plastic

Mounting cut-outs:

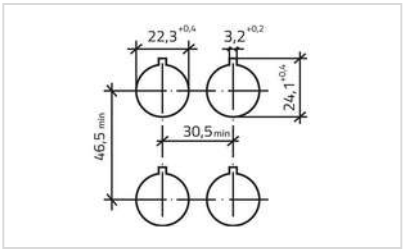

Dimension drawings:

