
E43358

Screw-in adapter for process sensors

ADAPT G1/2-G1 ASEPTOFLEX VARIO

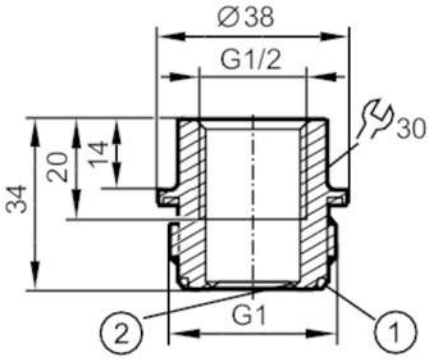

1 Sealing Aseptoflex Vario adapter
2 sealing edge sensor

EC 1935/2004 FDA

Application		
Pressure rating	[bar]	50
Tests / approvals		
Pressure Equipment Directive		A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC		The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions		The compatibility between medium and product material has to be checked in all applications.
Mechanical data		
Weight	[g]	220.5
Materials		stainless steel (1.4435 / 316L)
Sensor connection		G 1/2 sealing cone
Process connection		threaded connection G 1 external thread Aseptoflex Vario
Surface characteristics Ra/Rz of the wetted parts		0.4 / 4
Remarks		
Pack quantity		1 pcs.