Technical Library

Test Probe Details

RS Stock No	Colour
423-605	Black
423-611	Red

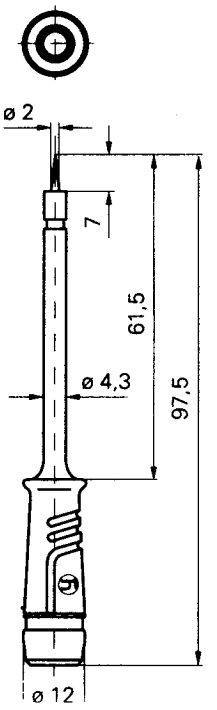

Description	Test probe with elastic shatter-proof insulated sleeve. Both insulating layers and backing layers on printed circuit boards can be penetrated by the slim stainless steel tip (7 mm, bright metal). **4 mm dia. socket connection** made of brass.

Technical data		
Type of connection/ Connector		ø 4 mm
Test probe		rigid
Volume resistance (max.)		50 mΩ
Permissible temperature range		–25 °C . . . +80 °C
Colour index*	**black**	**-100**
	red	**-101**

RS Components shall not be liable for any liability or loss of any nature (howsoever caused and whether or not due to RS components' negligence) which may result from the use of any information provided in RS literature.

RS Components Ltd. PO Box 99, Corby, Northants, NN17 9RS
An Electrocomponents Company
Telephone: 01536 201234
© RS Components Ltd. 1999