
EVC961

Connecting cable with socket

ADOAH050MSE0010C05

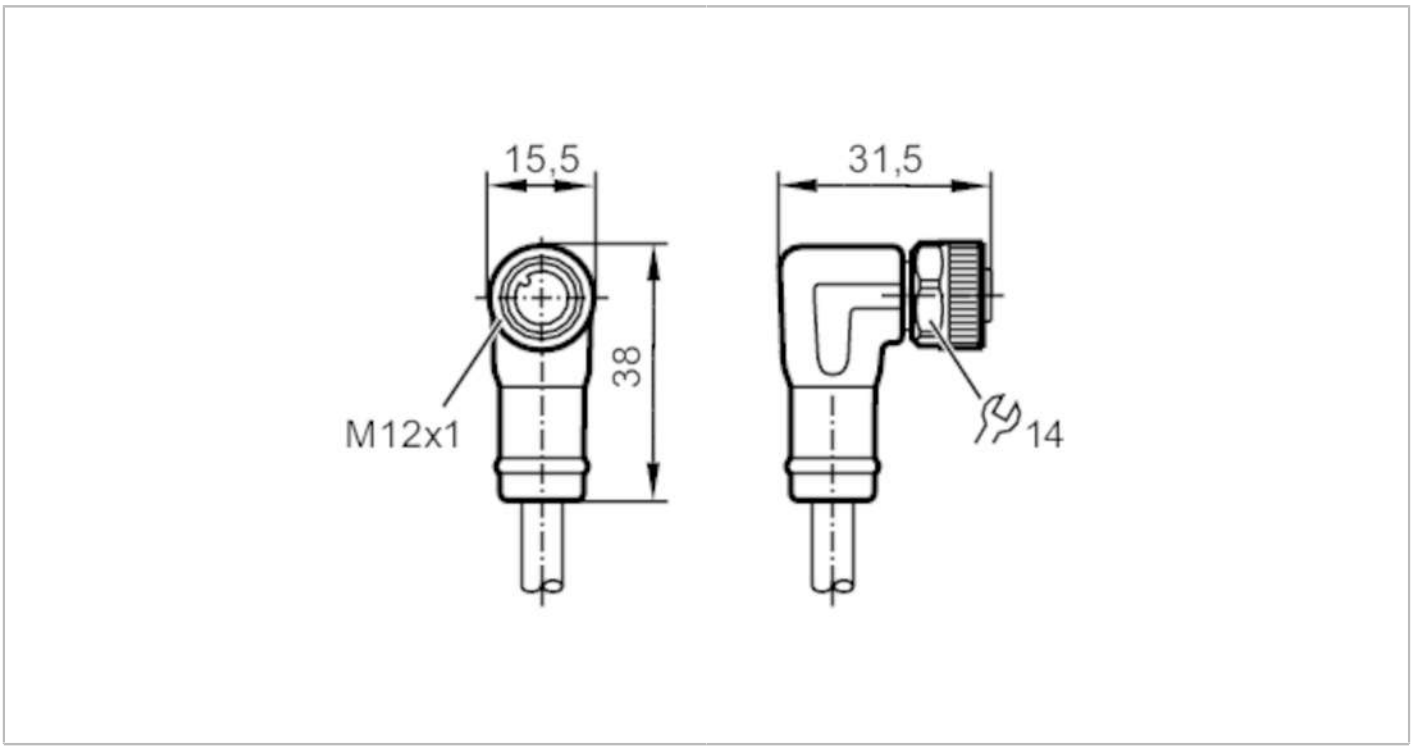

Application		
Special feature		Halogen-free; Gold-plated contacts; Screened cable; Drag chain suitability
Application		CAN bus
Electrical data		
Operating voltage	[V]	32 DC; (wires 4+5: 5 V)
Max. current load total	[A]	4; (wires 4+5: 0,05 A)
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67; IP 68; IP 69K
Mechanical data		
Weight	[g]	983.8
Dimensions	[mm]	38 x 15.5 x 31.5
Moulded-body material		TPU
Material nut		brass, nickel-plated
Sealing material		FKM
Drag chain suitability		yes
Drag chain suitability	bending radius for flexible use	min. 10 x cable diameter
	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
	bending cycles	> 5 Mio.
	torsional strain	± 180 °/m
Remarks		
Remarks		The CAN bus terminating resistor (120 Ω) is integrated in the M12 connector.
Pack quantity		1 pcs.

EVC961

Connecting cable with socket

ADOAH050MSE0010C05

Electrical connection


Cable: 10 m, PUR, Halogen-free, lilac, Ø 8.4 mm, shielded; red / black: 2 x 0.75 mm² (42 x Ø 0.15 mm) + white / blue: 2 x 0.5 mm² (19 x Ø 0.19 mm) + screen: 1 x 0.75 mm² (42 x Ø 0.15 mm)

Electrical connection - socket

Connector: 1 x M12, angled; coding: A; Moulded body: TPU, black; Locking: brass, nickel-plated; Sealing: FKM; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Connection

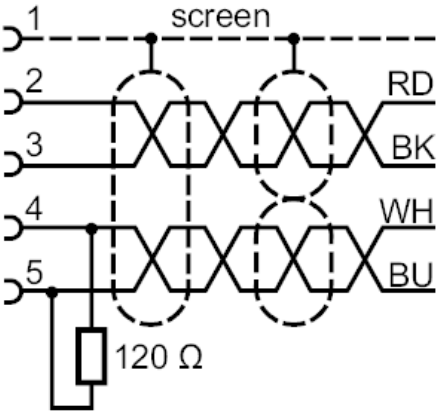

	Core colours :
BK =	black
BU =	blue
RD =	red
WH =	white
screen =	screen