

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	PRELIMINARY RELEASE	2008.04.17	E. STAUBLE
A	INCREASED TOL. TO +/-.05 FOR 2.10 & 2.37 DIMS RELOCATED L-com TEXT	2008.05.12	S. SMITH
B	ECN 4308: ADDED VOLTAGE, AMP AND PACKAGING NOTES	10/12/09	D.FRISIELLO
C	ECN 5463: ADDED PANEL CUTOUT	4/26/11	D. CASTRO


WIRING TABLE


DB25 PIN #	TERMINAL BLOCK #
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
GROUND	26



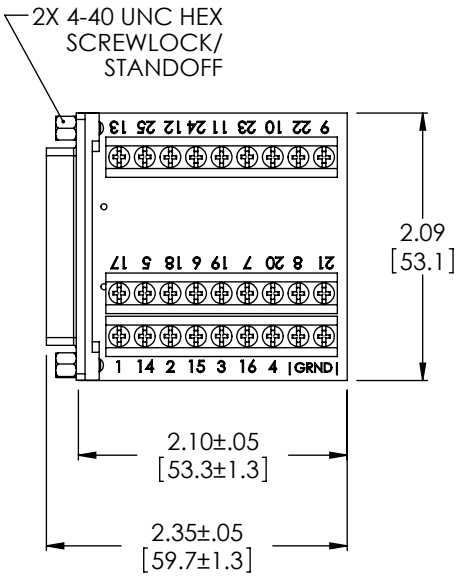

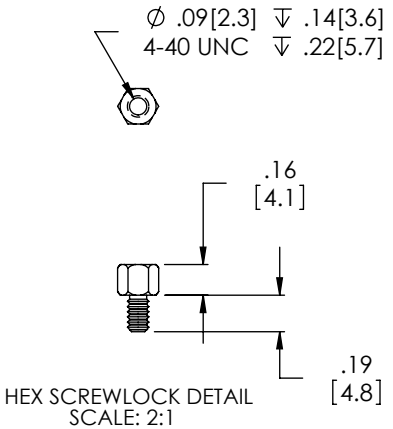

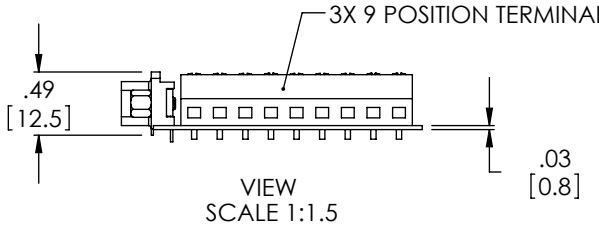

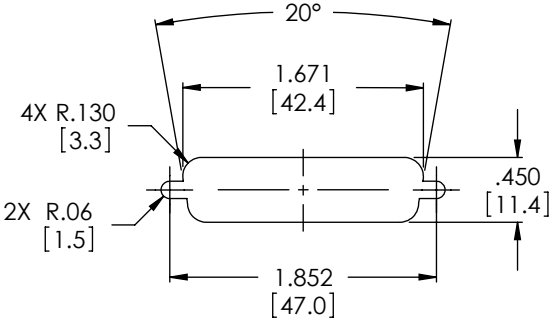

RoHS Compliant ✔

C RECOMMENDED PANEL OPENING
(MAX PANEL THICKNESS: 0.06")

NOTES:

VOLTAGE: 1000V AC AND 500V DC.
CURRENT RATING: 3 AMPS

COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005

PROJECTION

APPROVALS	DATE
DRAWN BY E STAUBLE	2008.04.14
CHECKED BY D. CASTRO	2008.04.15
APPROVED BY D. PARHAM	2008.04.15

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: DATA

PRODUCT DESCRIPTION: D-SUB FIELD TERMINATION ASSEMBLY

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	DGB25FT	C

SCALE: NONE | CAD FILE: DGB25FT.SLDDRW | SHEET 1 OF 1