


16-Port Rackmount KVM Switch

TK-1603R (v2.0R)

- Controls up to 16 computers or servers
- Console port supports both USB and PS/2 for keyboard and mouse interfaces
- USB only for PC side mouse and keyboard connections
- Supports Windows®, Linux®, Mac OS® and more
- Supports up to 2048 x 1536 VGA resolution
- Auto-scan for monitored PCs with adjustable scan interval from 10-99 seconds
- Keyboard status restored when switching between computers
- LEDs display for easy status monitoring
- Audio notification for port switching confirmation (enable/disable)
- Keyboard hot-key command or push button switching
- Plug & Play and Hot-Pluggable
- Required cabling sold separately (TK-CU06 / TK-CU10 / TK-CU15)
- Standard 19" (1U) rackmount design
- 2 year warranty

TRENDnet's 16-Port Rackmount VGA KVM Switch, model TK-1603R, lets you manage multiple computers with just one set of keyboard, monitor, and mouse. This rackmount KVM switch supports USB and PS/2 interface on the console side, and USB only on the PC side. Popular hardware platforms such as Windows, Linux, and Mac are supported. Users can switch between PCs using hot-key or push button for flexible management. Users can also hot-plug PCs on the fly to avoid downtime. The 16-Port Rackmount KVM Switch is the perfect choice for managing multiple PC's.




KVM Interface

USB and PS/2 interface on the console side and USB only on the PC side mouse and keyboard connections.



Video Resolution

Supports up to 2048 x 1536 VGA resolution.




16-Port KVM

Manage up to 16 computers with this rackmount KVM switch.

NETWORKING SOLUTION



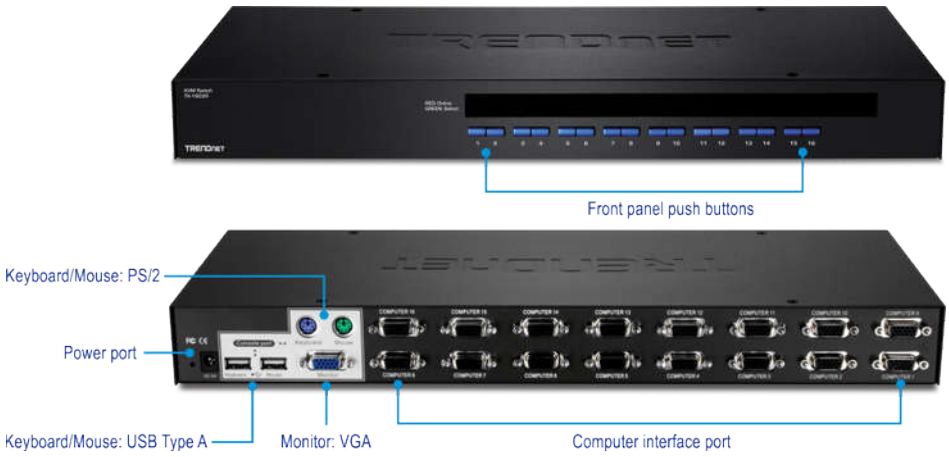

FEATURES

16-Port KVM
Manage up to 16 computers with this rackmount KVM switch

VGA Monitor
Designed to connect to a monitor's VGA port

Video Resolution
Supports up to 2048 x 1536 VGA resolution

USB and PS/2 Console Support
Supports both USB and PS/2 console connections

USB Client Interface Support
USB PC-side interface supports USB only for mouse and keyboard connections to each computer (cables sold separately, TK-CU06/TK-CU10/ TK-CU15)

OSD
On Screen Display (OSD) interface for efficient management

Rackmount Design
Sturdy metal 19" rackmount design

Hot Keys
Hot-key commands available

SPECIFICATIONS

Console Port Connectors
- Keyboard: USB Type A, PS/2
- Mouse: USB Type A, PS/2
- Monitors: VGA

Computer Interface (up to 16)
- Keyboard/Mouse: USB Type A
- Monitors: VGA

Monitor Resolution
- 2048 x 1536

Switching Control
- Front panel push buttons
- Keyboard hot key commands

Operating Temperature
- 0° – 40° C (32° – 104° F)

Operating Humidity
- Max. 80 % non-condensing

Power
- Input: 100 - 240V AC, 50/60Hz, 0.8A
- Output: 9V DC, 1A external power adapter
- Max. consumption: 0.7W

Dimensions
- 407 x 165 x 45mm (16 x 6.5 x 1.8 in.)

Weight
- 2kg (4.5 lbs.)

Certifications
- CE
- FCC

Warranty
- 2 year

Package Contents
- TK-1603R
- Quick Installation Guide
- Power adapter (9V DC, 1A)
- Rackmount kit

20675 Manhattan Place • Torrance • CA 90501 • USA • T: 1-888-326-6061 • F: 1-310-961-5511 • sales@trendnet.com • www.TRENDnet.com

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit http://www.trendnet.com. Copyright © TRENDnet. All Rights Reserved.

Updated: 7/11/2019