

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/23/12	D.GRIFFIN


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
CENTER CONTACT	BRASS	GOLD
OUTER CONTACT	BRASS	NICKEL
CRIMP FERRULE	BRASS	NICKEL
GASKET	RUBBER	-
INSULATOR	PTFE	-
RETAINING RING	BRASS	NICKEL

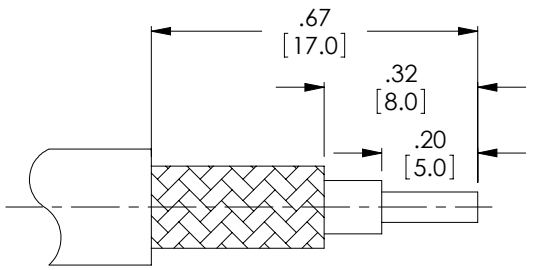


STRIPPING DIMENSIONS




RECOMMENDED
FERRULE CRIMP





CENTER PIN
-SOLDER ONLY-

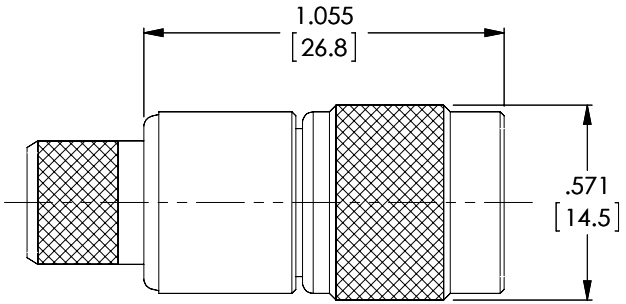

NOTES:

ELECTRICAL:
IMPEDANCE: 50 OHMS
WITHSTAND VOLTAGE: 1500V
FREQUENCY RANGE: 0~4 GHz
VSWR: <1.50 @ 0~4 GHz
DURABILITY: > 500 CYCLE
CABLE RETENTION: > 40 POUNDS

MISCELLANEOUS:
COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS	DATE
DRAWN BY D. DESJARDIN	5/18/12
CHECKED BY D. FRISIELLO	5/21/12
APPROVED BY K. BURGNER	5/22/12

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
COAXIAL

PRODUCT DESCRIPTION
CON,TNC MALE CRIMP LMR400

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	ATM-1402	A

SCALE: NONE | CAD FILE: ATM-1402.SLDDRW | SHEET 1 OF 1