19042000	DATA SHEET	LAPP
Valid from: 26.07.2024	EPIC® H-B 10 TS	

Description

- The smallest housing with single and double lever.
- The right housing is available for every application.



General Characteristics

Series	H-B 10
Version	Hood M20 / M25 (Article 19042100)
Locking	Bolts for double lever
Gland Body	Yes
Cable entry	Side
Protection (DIN EN 60529)	IP 65 (latched)
Protection (NEMA 250, UL50E)	4, 12 (latched)
Temperature Range	-40°C to +100°C, short term up to +125°C

Materials and Surfaces

Housing	Aluminium alloy, powder-coated, grey
Bolt	Heat-treatable steel, zinc-plated


Standard


Safety Standard	IEC 61984

We reserve all rights according to DIN ISO 16016.

Technical Drawings



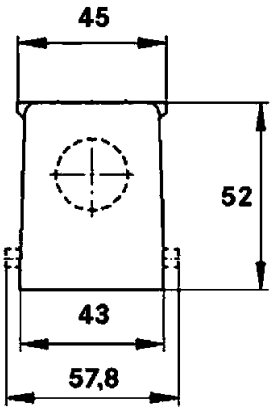

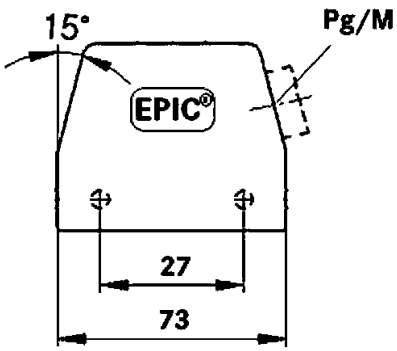


Automation


Industrial machinery and plant engineering


Mechanical resistance


Robust


Waterproof

Info

Universal, robust metal housings size H-B 10

Application range

Plant engineering
Light & sound technology
Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

We reserve all rights according to DIN ISO 16016.