Laserliner®

SuperLine 2D



2-axis line laser – Easy to operate with 360° rotatable angle scale.

Rev. 1108

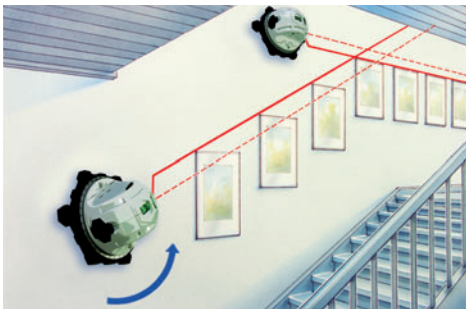

– Attach to carpets, painted walls, finishing coats, gypsum fibreboard, tiles, glass, wood, veneered surfaces, etc., **easily and without causing any damage**.
– **Aligning:** The rotatable angle scale means that the device and the graduated collar can be set separately to any angle.
– **Wall applications**: Attach base plate to wall using special pins – enables precise horizontal and vertical levelling.
Optional: Attachment also possible with adhesive strips – Laserliner ConTacts.
– **Floor applications:** Place the device and base plate on the floor – in this position, the device cannot be used as a spirit level.
– **Magnet attachment:** Powerful adhesion magnets facilitate attachment to magnetic surfaces.
– **Laser:** Bright





TECHNICAL DATA

ACCURACY 1 mm / 1 m
LASER WAVELENGTH 650 nm / ± 10 nm
LASER class 2 M, < 5 mW (EN 60825-1:2005-10)
POWER SUPPLY **batteries** 2 x type AAA
WEIGHT 0.2 kg
DIMENSIONS (W x H x D) 120 x 70 x 100 mm

magnetic Laser



Service

Articel No: 081.110A
EAN-Code: 4 021563 662579

SuperLine 2D
+ batteries (2 x type AAA)

Packing dimension (W x H x D)
190 x 155 x 70 mm

PU 5



Attachment with pins



Magnetic



Optional adhesive strips

OPTIONAL ACCESSORIES

ARTICEL	ARTICEL NO	EAN-CODE	PU
Laser enhancement glasses/ideal visibility for laser marker	020.70A	4 011879 643980	1
ConTacts / 12 pieces	081.101A	4 021563 662883	1

UMAREX GmbH & Co. KG · Donnerfeld 2 · 59757 Arnsberg · Germany · Tel. +49 2932 638-300 · Fax +49 2932 638-333 · laserliner@umarex.de · www.laserliner.com