HR7XS2

Socket for relay for fitting on DIN rail or with screws, 11-Pin for HR703C... screw terminals



Product designation		SOCKET
Product type designation		HR7X


Contact characteristics

Rated insulation voltage Ui IEC/EN	V	250
Rated impulse withstand voltage Uimp	kV	4


Mechanical features


Fixing		On 35mm DIN rail and with screw

Dimensions

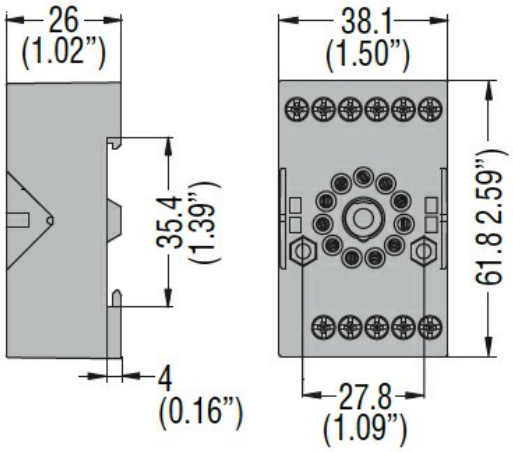

Wiring diagrams

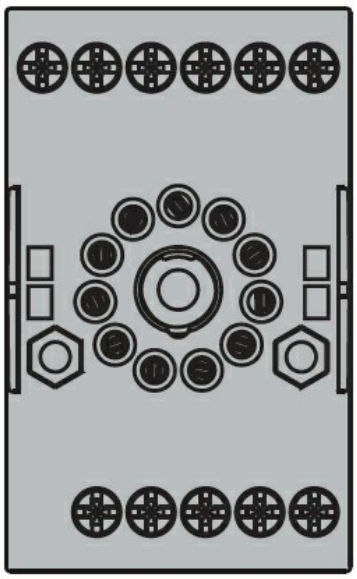

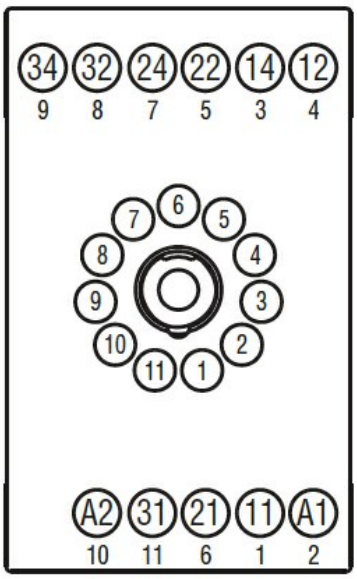

Certifications and compliance

Compliance

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	IEC/EN 61810
Certificates	
	CSA
	cURus
	EAC

ETIM classification

ETIM 8.0	EC001456 - Relay socket

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding