MURR ELEKTRONIK
stay connected

# M12 FEMALE 0° FIELD-WIREABLE SCREW TERM.


5-pol. max.0,75mm² 6-8mm

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

## Link to Product

### Illustration




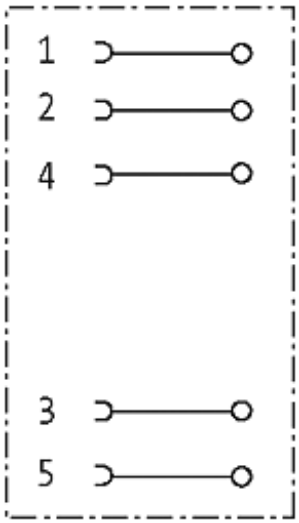



The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

MURR ELEKTRONIK
stay connected

# Female

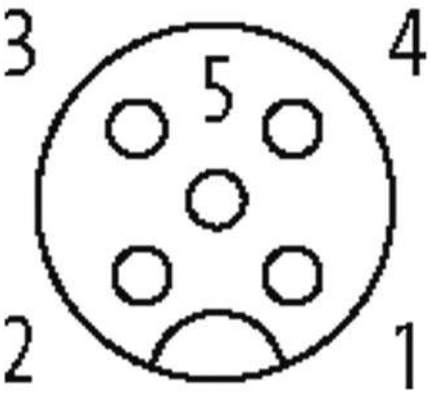

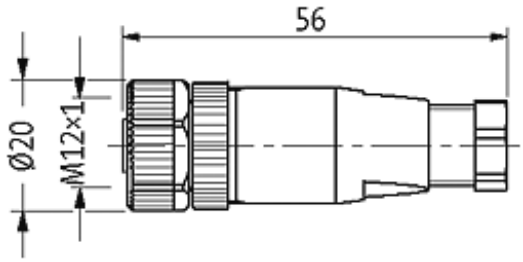
Product may differ from Image

## Approvals

## Form

| | |
|---|---|
| Form | 12961 |

## Technical Data

| | |
|---|---|
| Operating voltage | max. 125 V AC/DC |
| Operating current per contact | max. 4 A |
| Connection cross section | max. 0.75 mm² |
| Sealing range (cable Ø) | 6...8 mm |
| Locking of ports | Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing |
| Protection | IP67 inserted and tightened (EN 60529) |

## General data

| | |
|---|---|
| Temperature range | -25...+85 °C |
| Dimensions H × W × D | 54×20×20 mm |

## Commercial data

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

| | |
|---|---|
| country of origin | DE |
| customs tariff number | 85369010 |
| EAN | 4048879201537 |
| eClass | 27279221 |
| minimum order quantity | 1 |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com